

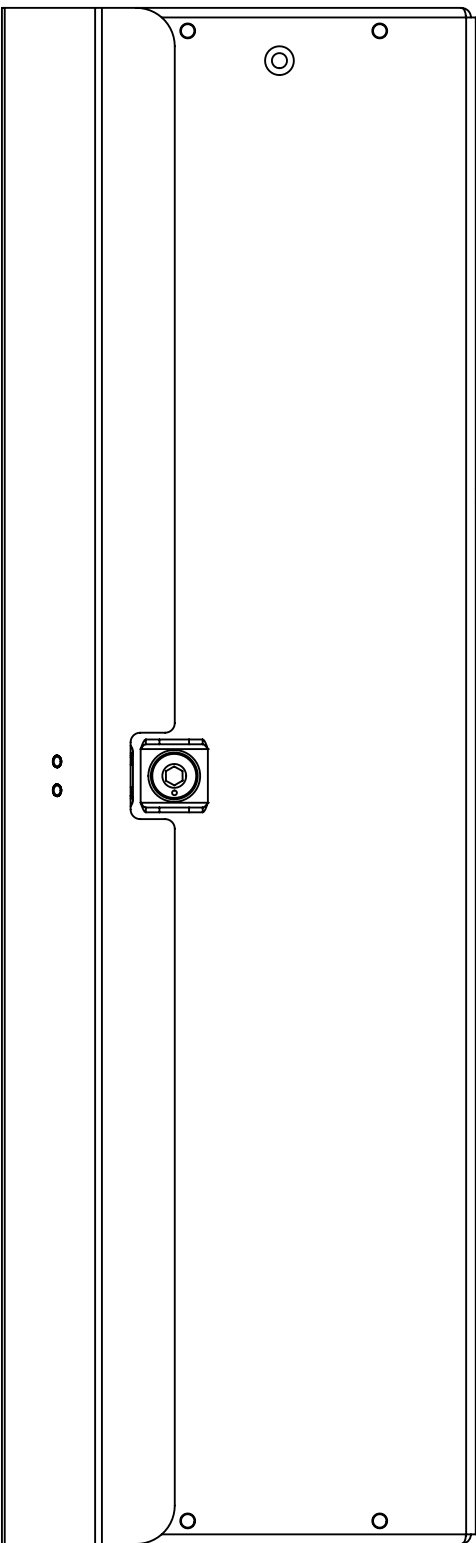
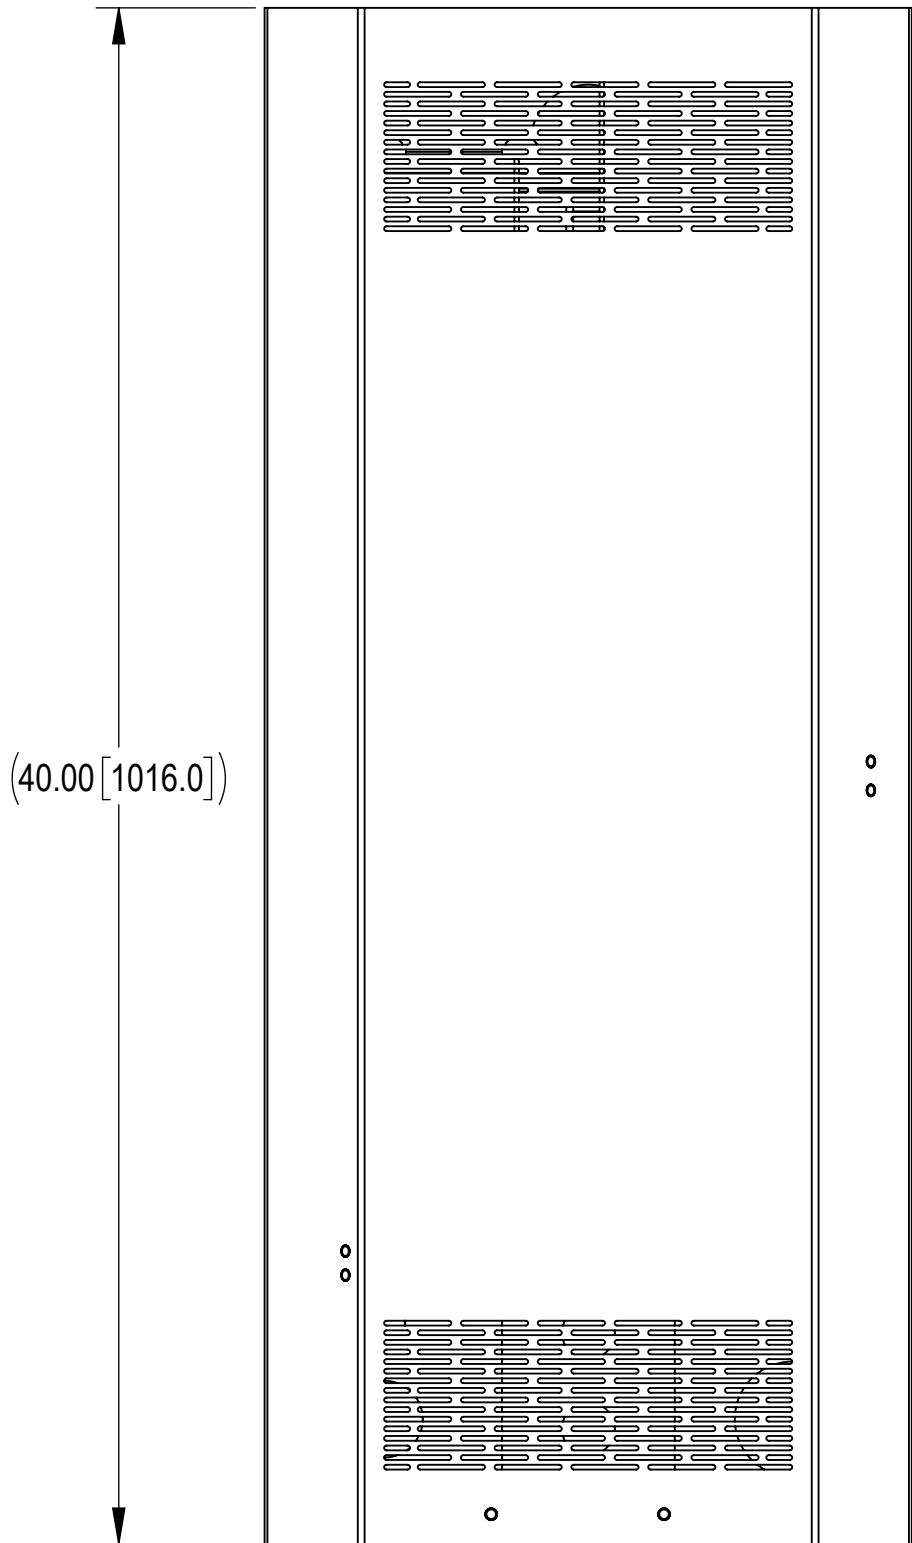
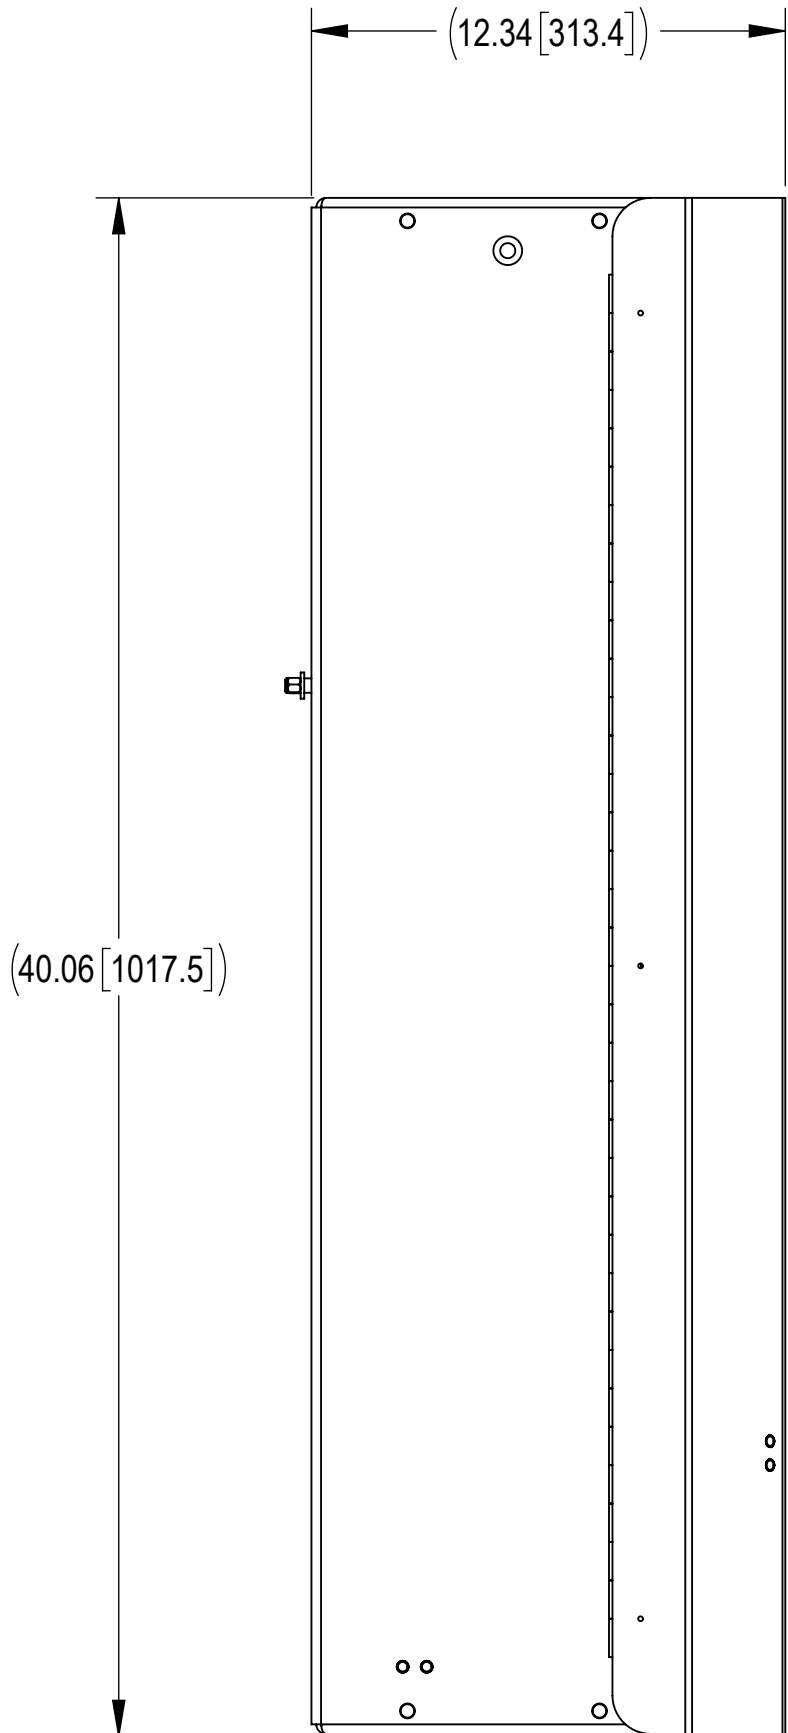


# Installation Instructions

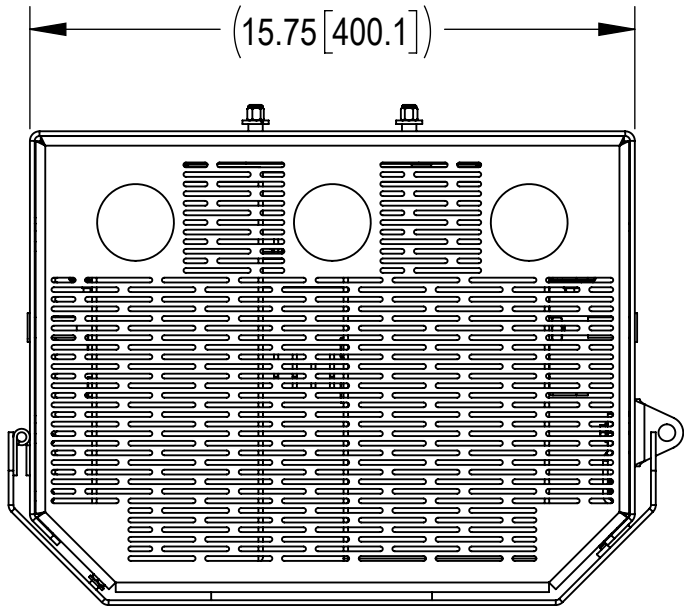

## 860665118-AMK-003-INSTALL INSTALLATION INSTRUCTION

REPI,AMK ERC 4461, 4471

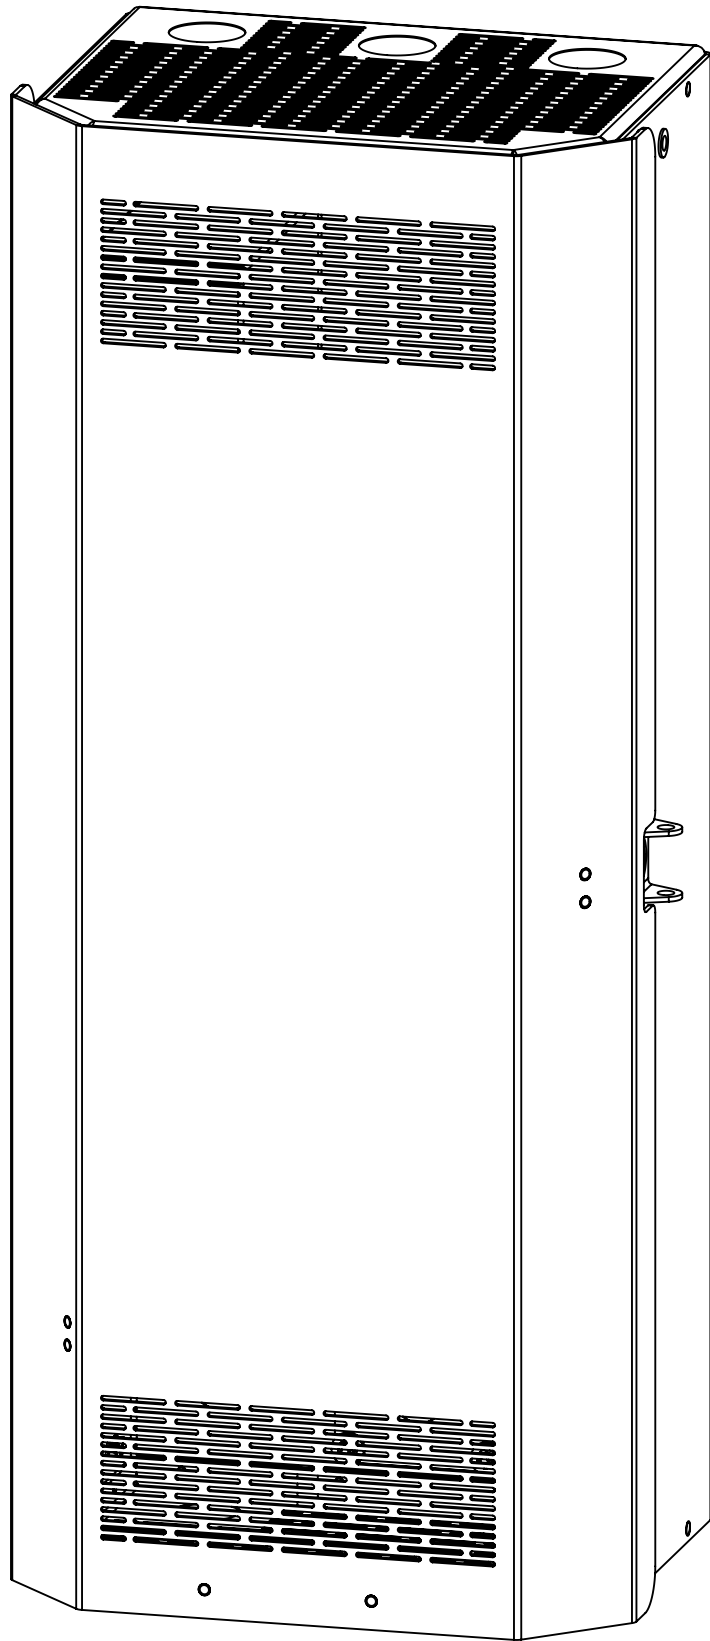


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	MS1288 21APR25	JX1002 50102527AMO

This table show the evolution and history of document from initial to current version.


Further information regarding ANDREW's commitment can be found at <https://www.andrew.com/sustainability/>.  
Visit our website or contact your local ANDREW representative for more information.  
This product is covered by one or more U.S. patents or their foreign equivalents. For patents, see [www.adwpat.com](http://www.adwpat.com).

- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X.X]
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN HARDWARE, TORQUE VALUE ARE SHOWN BELOW AS REFERENCE,  
M6: TORQUE 40.0 IN-LB OR 4.5 N-M (W/ CLIP NUT)  
M6: TORQUE 46.0 IN-LB OR 5.2 N-M (W/ THREADED CAST AL)  
M6: TORQUE 75.0 IN-LB OR 8.5 N-M (W/ STEEL NUT)  
M8: TORQUE 6.6 FT-LB OR 9.0 N-M (W/ THREADED CAST AL)  
1/4-20: TORQUE 4.8 FT-LB OR 6.6 N-M  
3/8-16: TORQUE 19.6 FT-LB OR 26.6 N-M
- 3.2 CONFIGURATIONS AND QUANTITY OF EQUIPMENTS IN INSTALLATION ARE LISTED ON TABLE.
- 3.3 EQUIPMENT INSTALLATION INSTRUCTION ON PAGE 3.


ERICSSON CONFIGURATION	3.2 APPROVED ERICSSON RADIO CONFIGURATIONS		
	4461	4471	PSU AC08
1		1	1
2	1		1
3	1	1	2

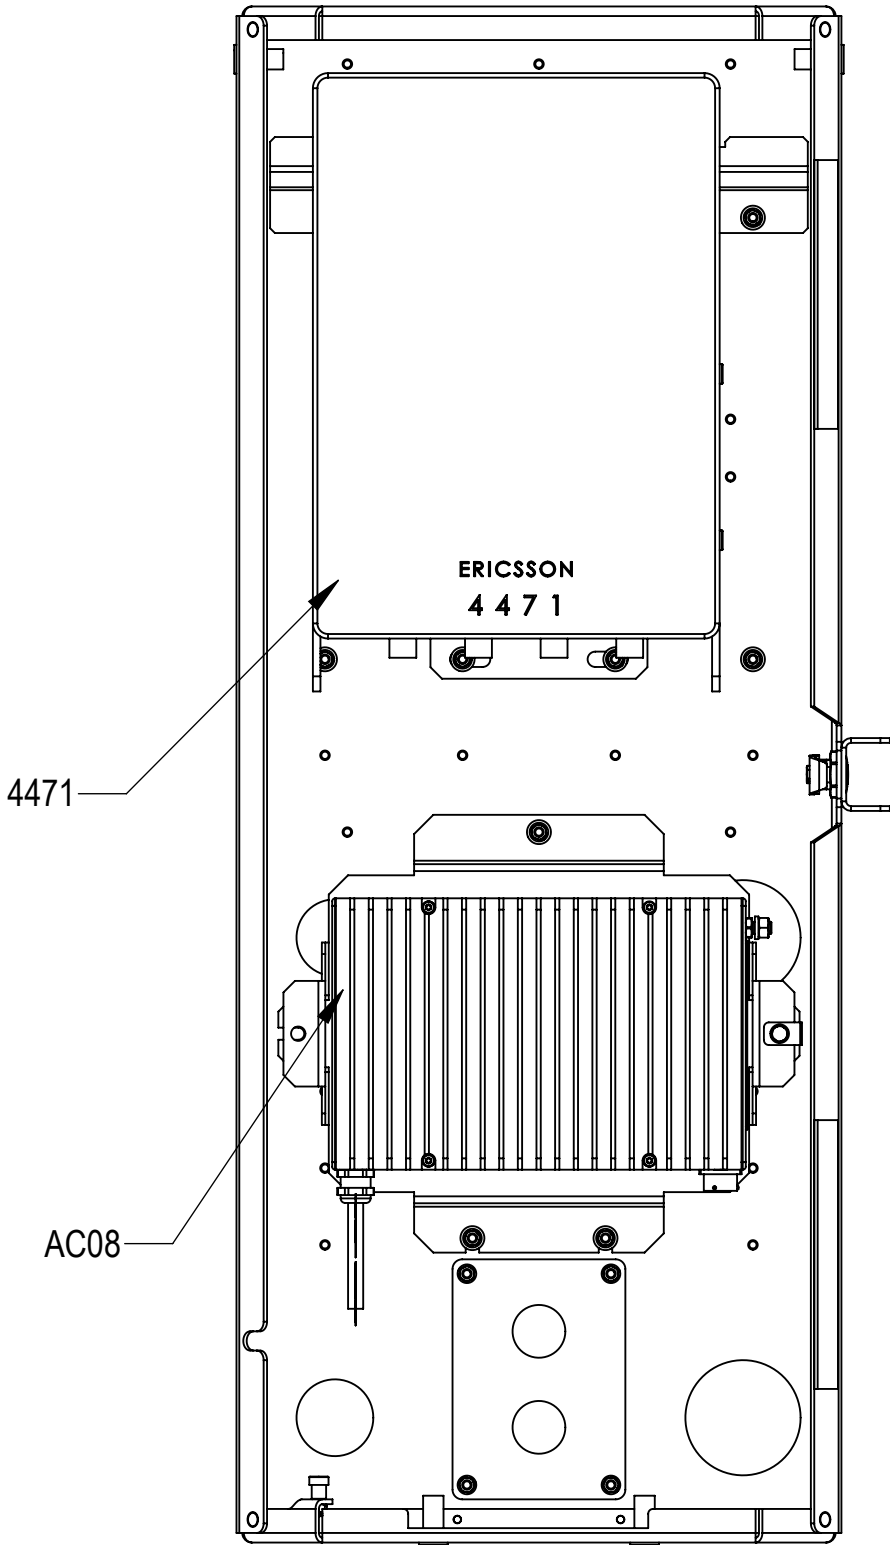

CONFIGURATION 1  
FRONT VIEW

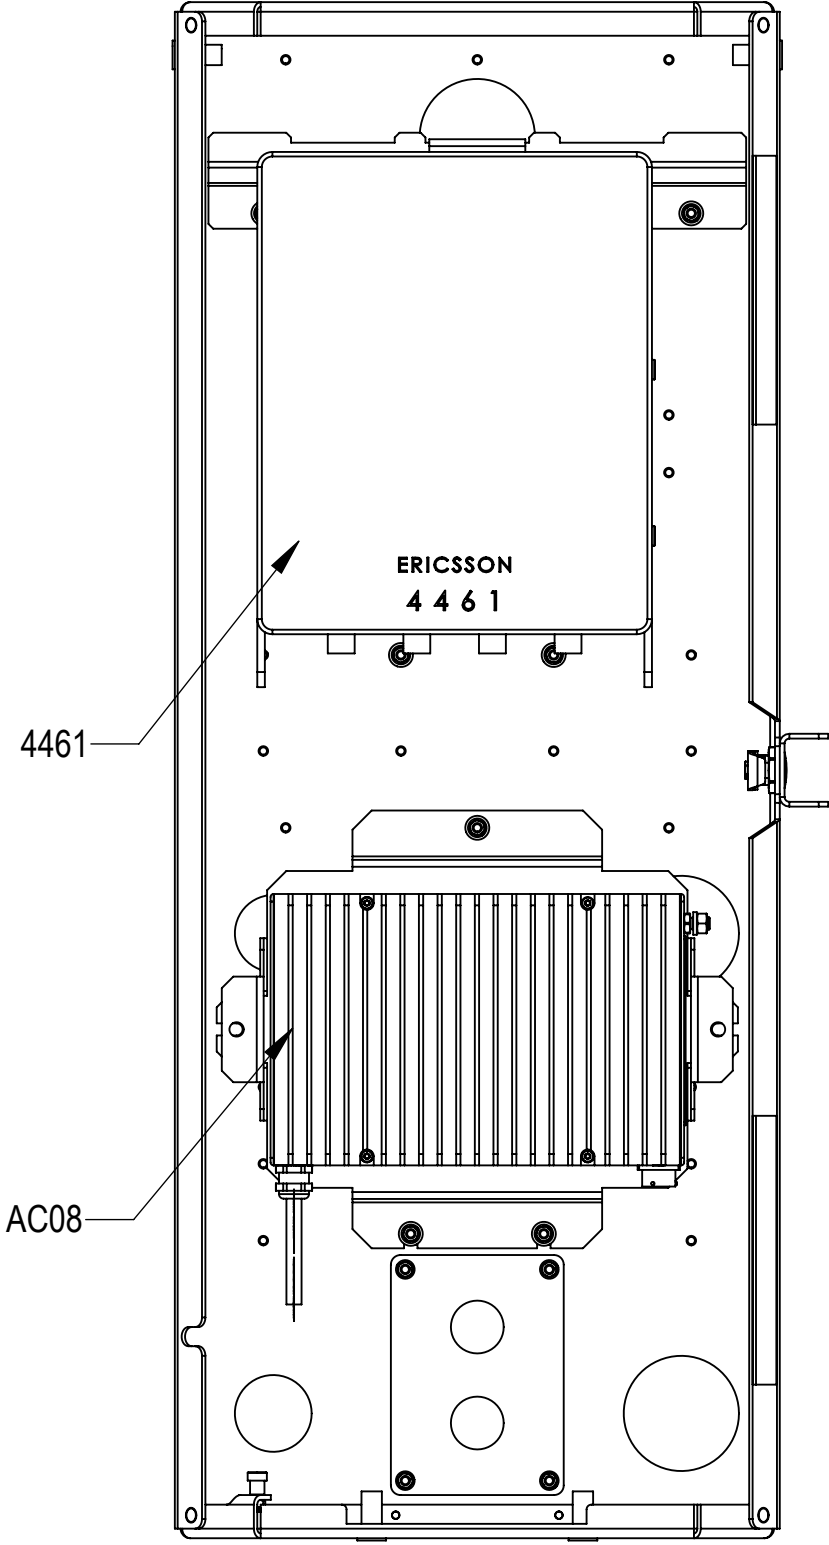


CONFIGURATION 2  
FRONT VIEW

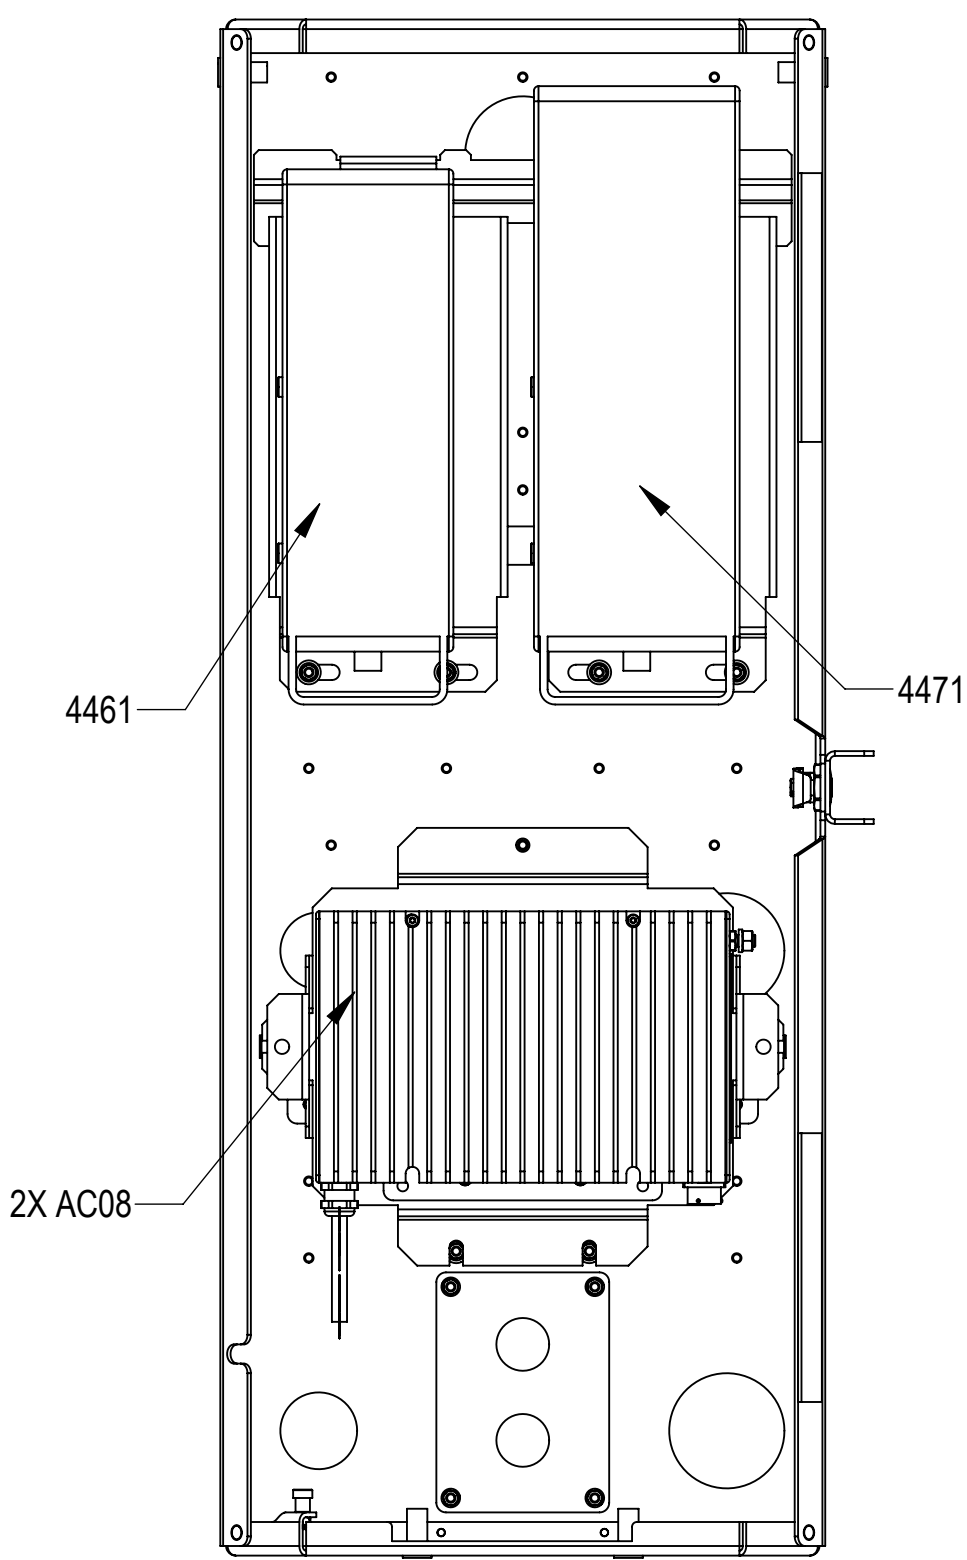


CONFIGURATION 3  
FRONT VIEW


EQUIPMENT MOUNTING INSTALLATION

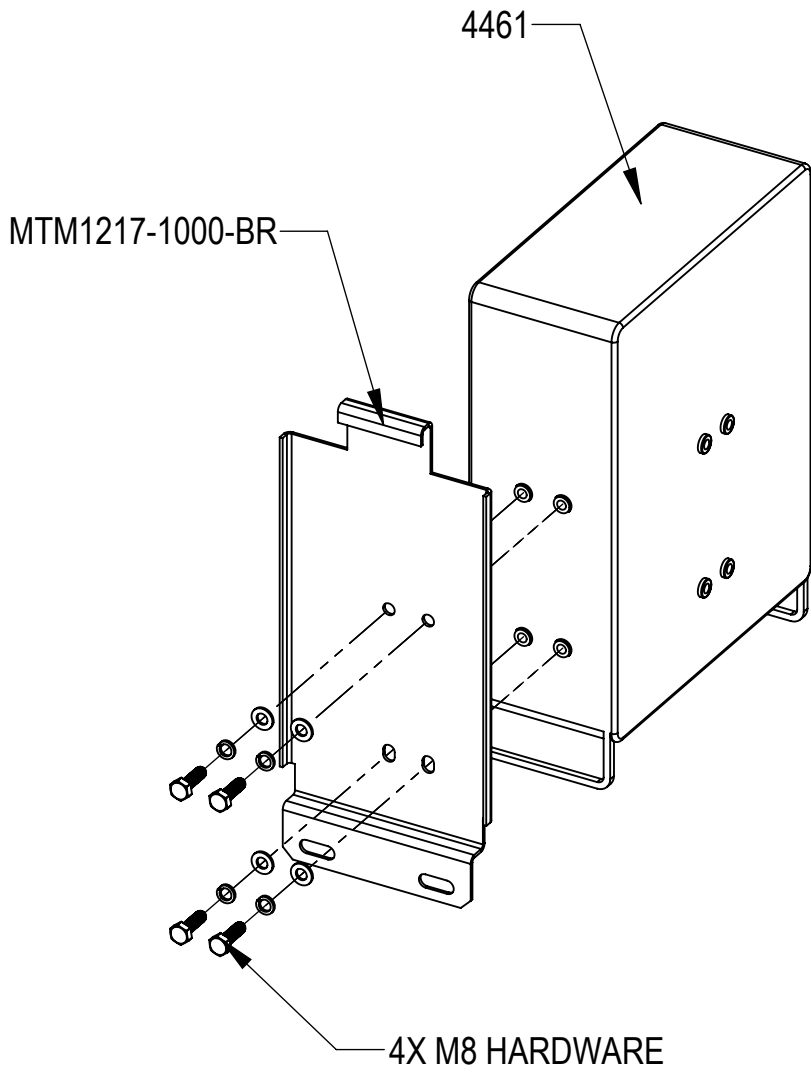


4461:  
INSTALL 4461 TO THE BRACKET MTM1217-1000-BR USING 4 SETS OF M8 HEX BOLT, LOCK WASHER AND FLAT WASHER AS SHOWN

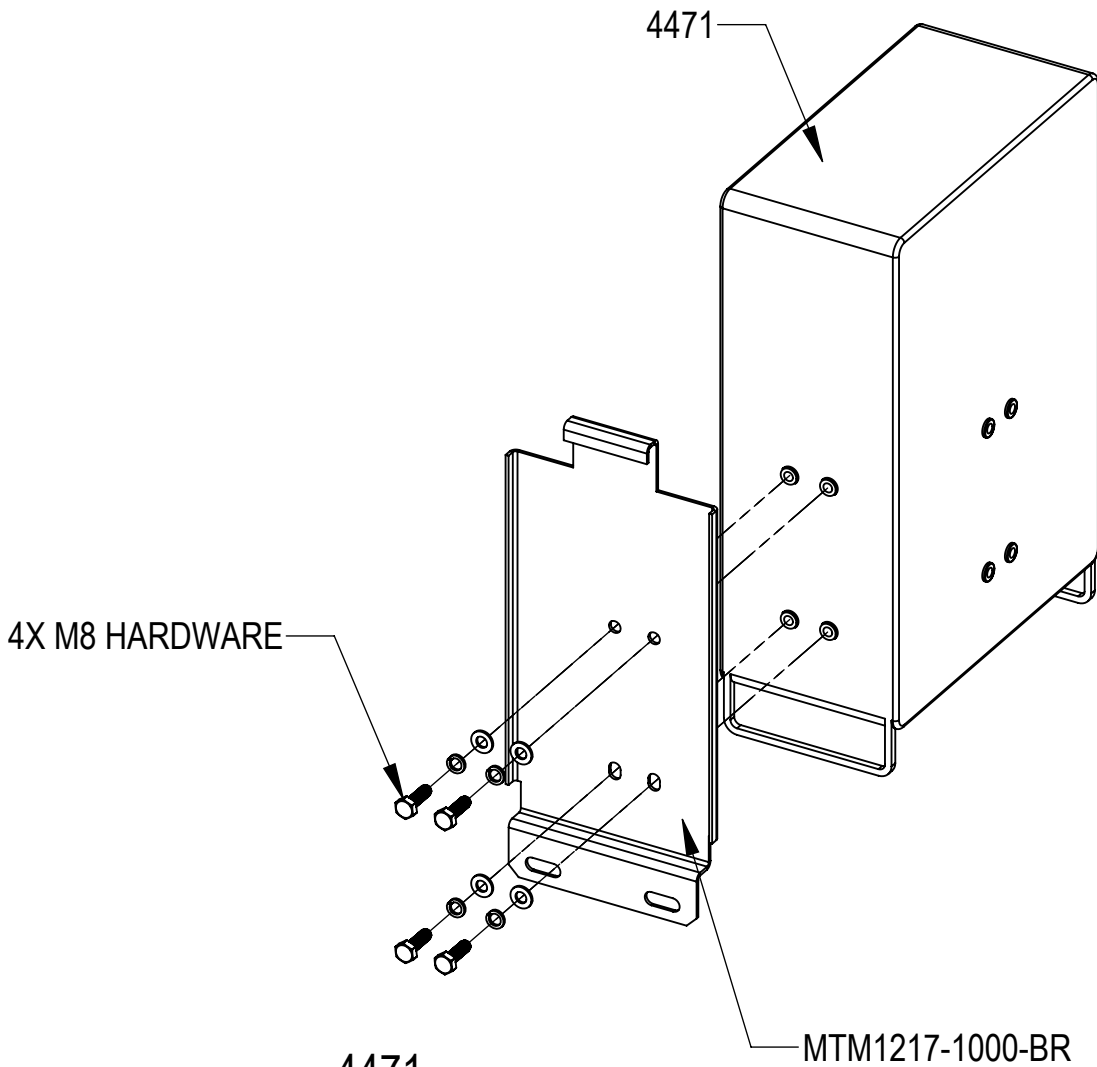


4471:  
INSTALL 4471 TO THE BRACKET MTM1217-1000-BR USING 4 SETS OF M8 HEX BOLT, LOCK WASHER AND FLAT WASHER AS SHOWN

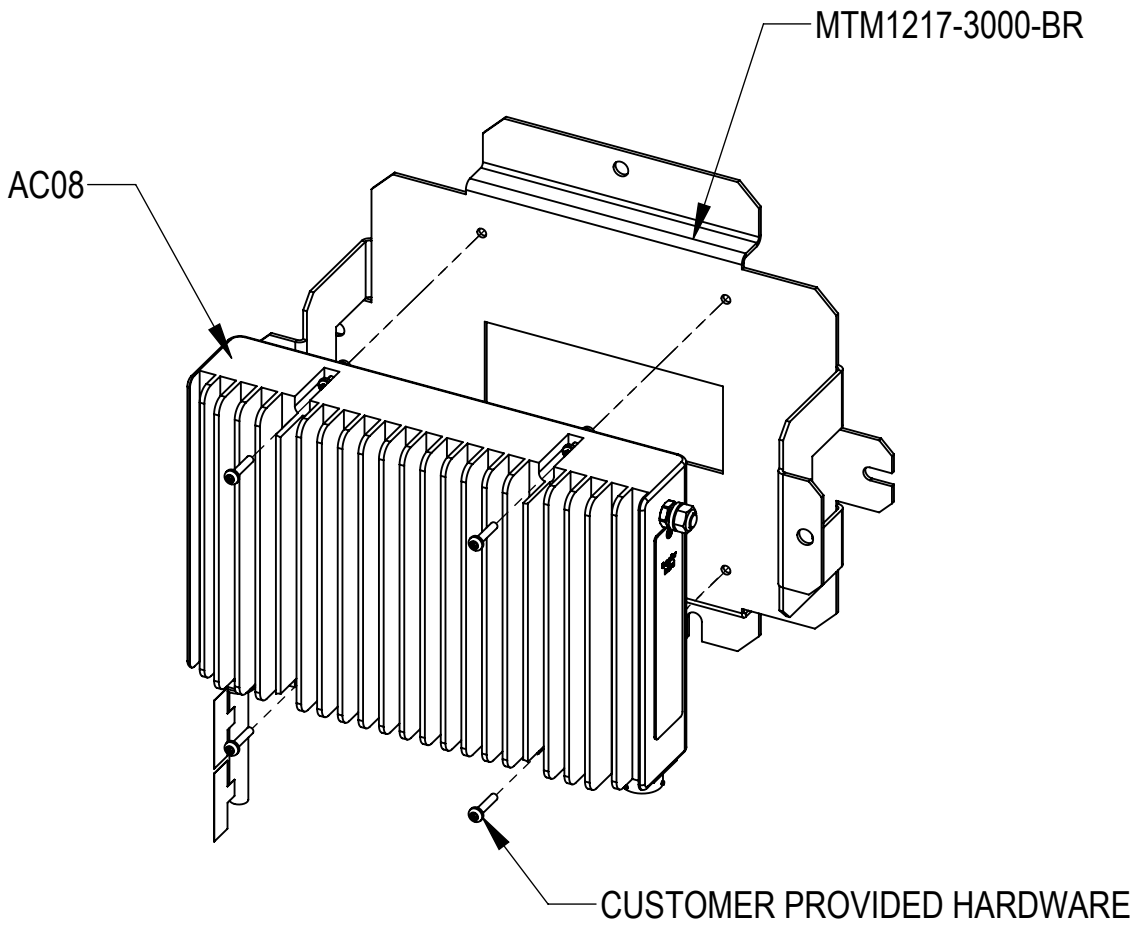

AC08:  
INSTALL PSU AC08 TO THE BRACKET MTM1217-3000-BR USING 4 SETS OF M4 CAPTIVE HARDWARE PROVIDED WITH THE PSU AC08

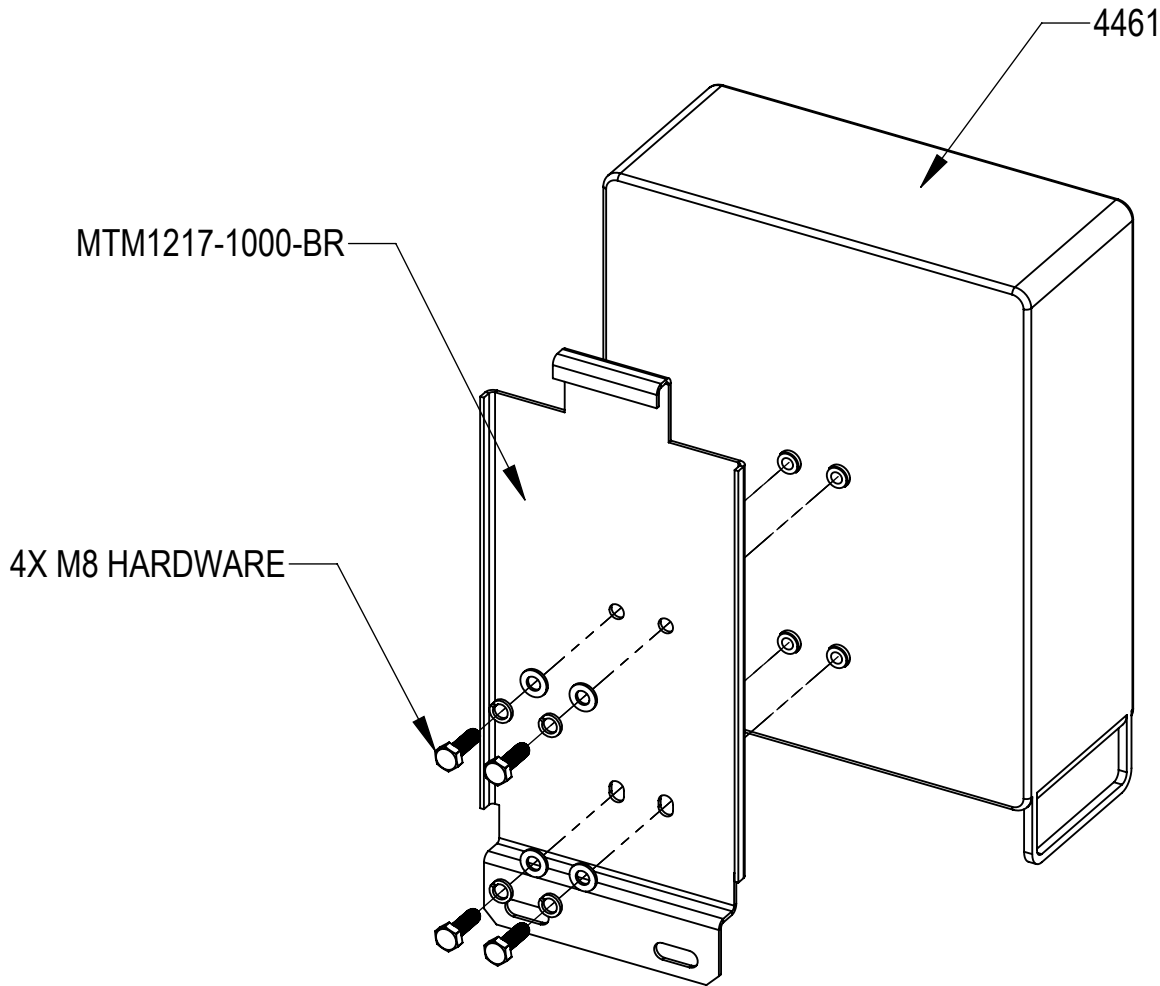

4461:  
INSTALL 4461 TO THE BRACKET MTM1217-1000-BR USING 4 SETS OF M8 HEX BOLT, LOCK WASHER AND FLAT WASHER AS SHOWN

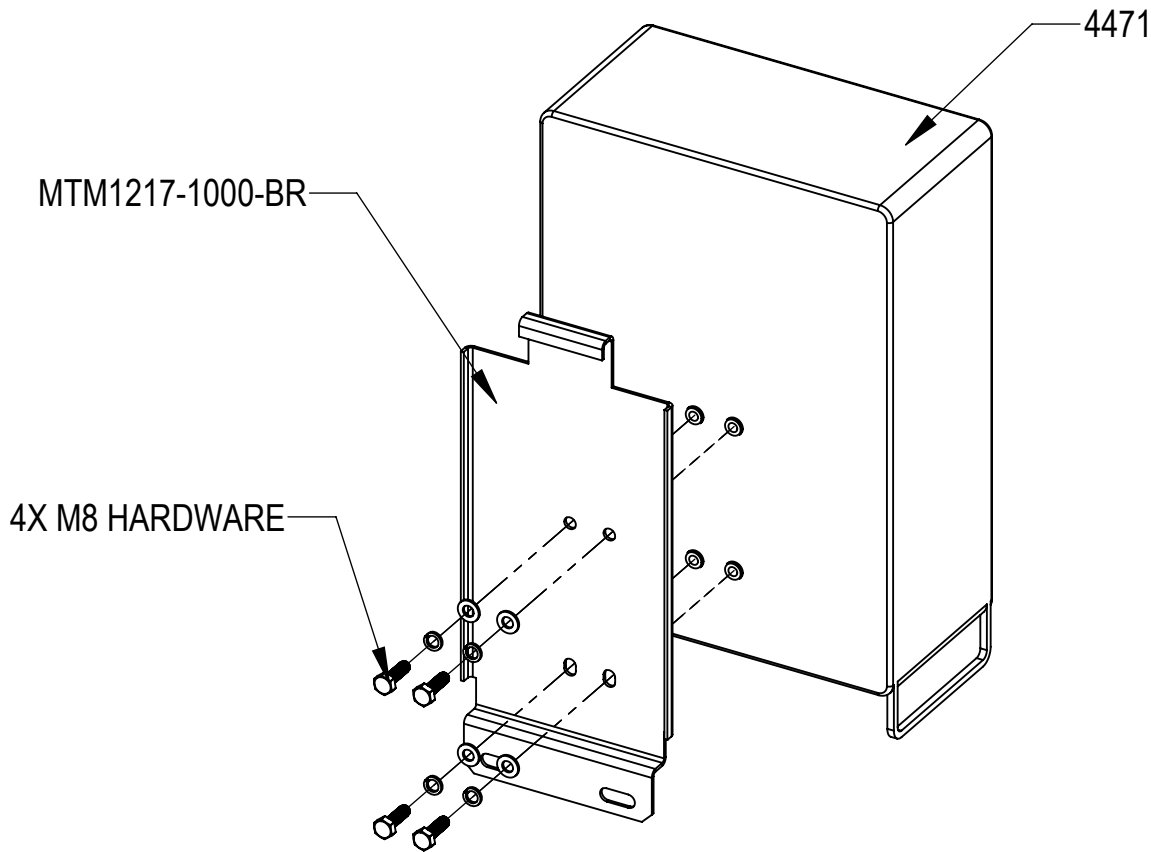


4471:  
INSTALL 4471 TO THE BRACKET MTM1217-1000-BR USING 4 SETS OF M8 HEX BOLT, LOCK WASHER AND FLAT WASHER AS SHOWN

# Installation Instructions




CONFIGURATION 1 - 4471 AND AC08  
CONFIGURATION 2 - 4461 AND AC08

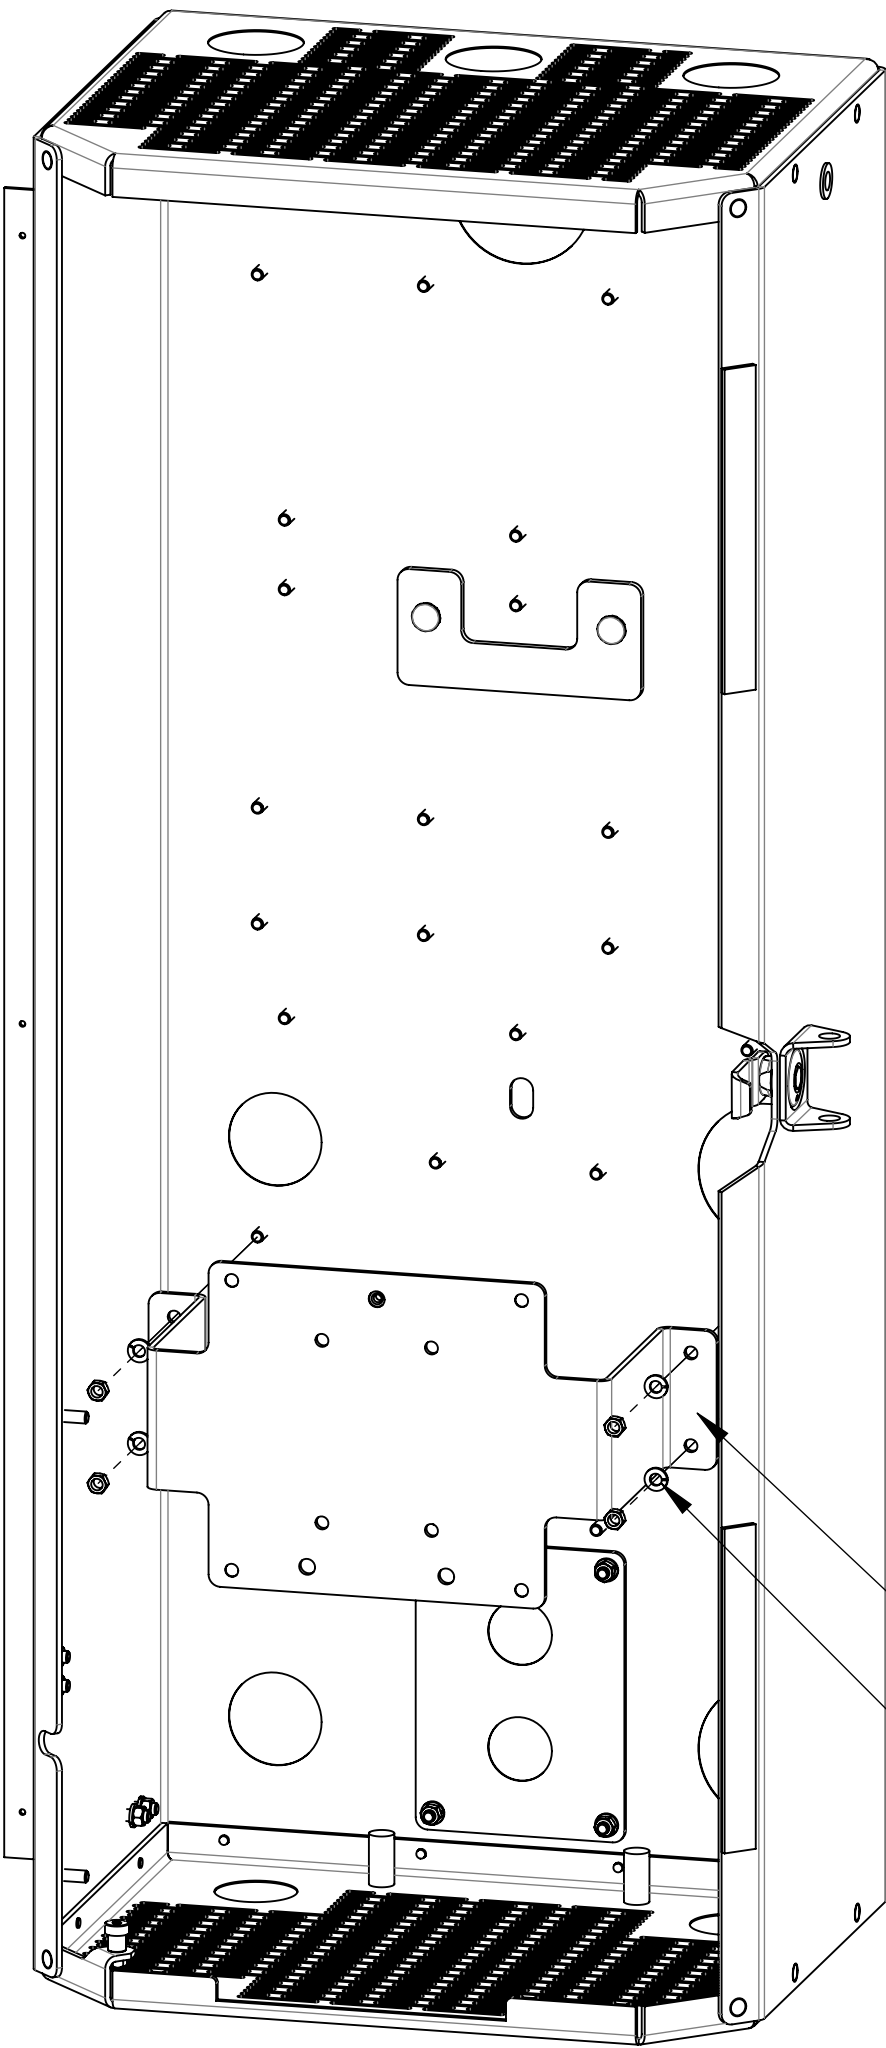


STEP 1:

REMOVE THEM IF THE PICO ENCLASURE HAS THE BRACKET  
MTM100030-BR & 1/4" NUT HARDWARE

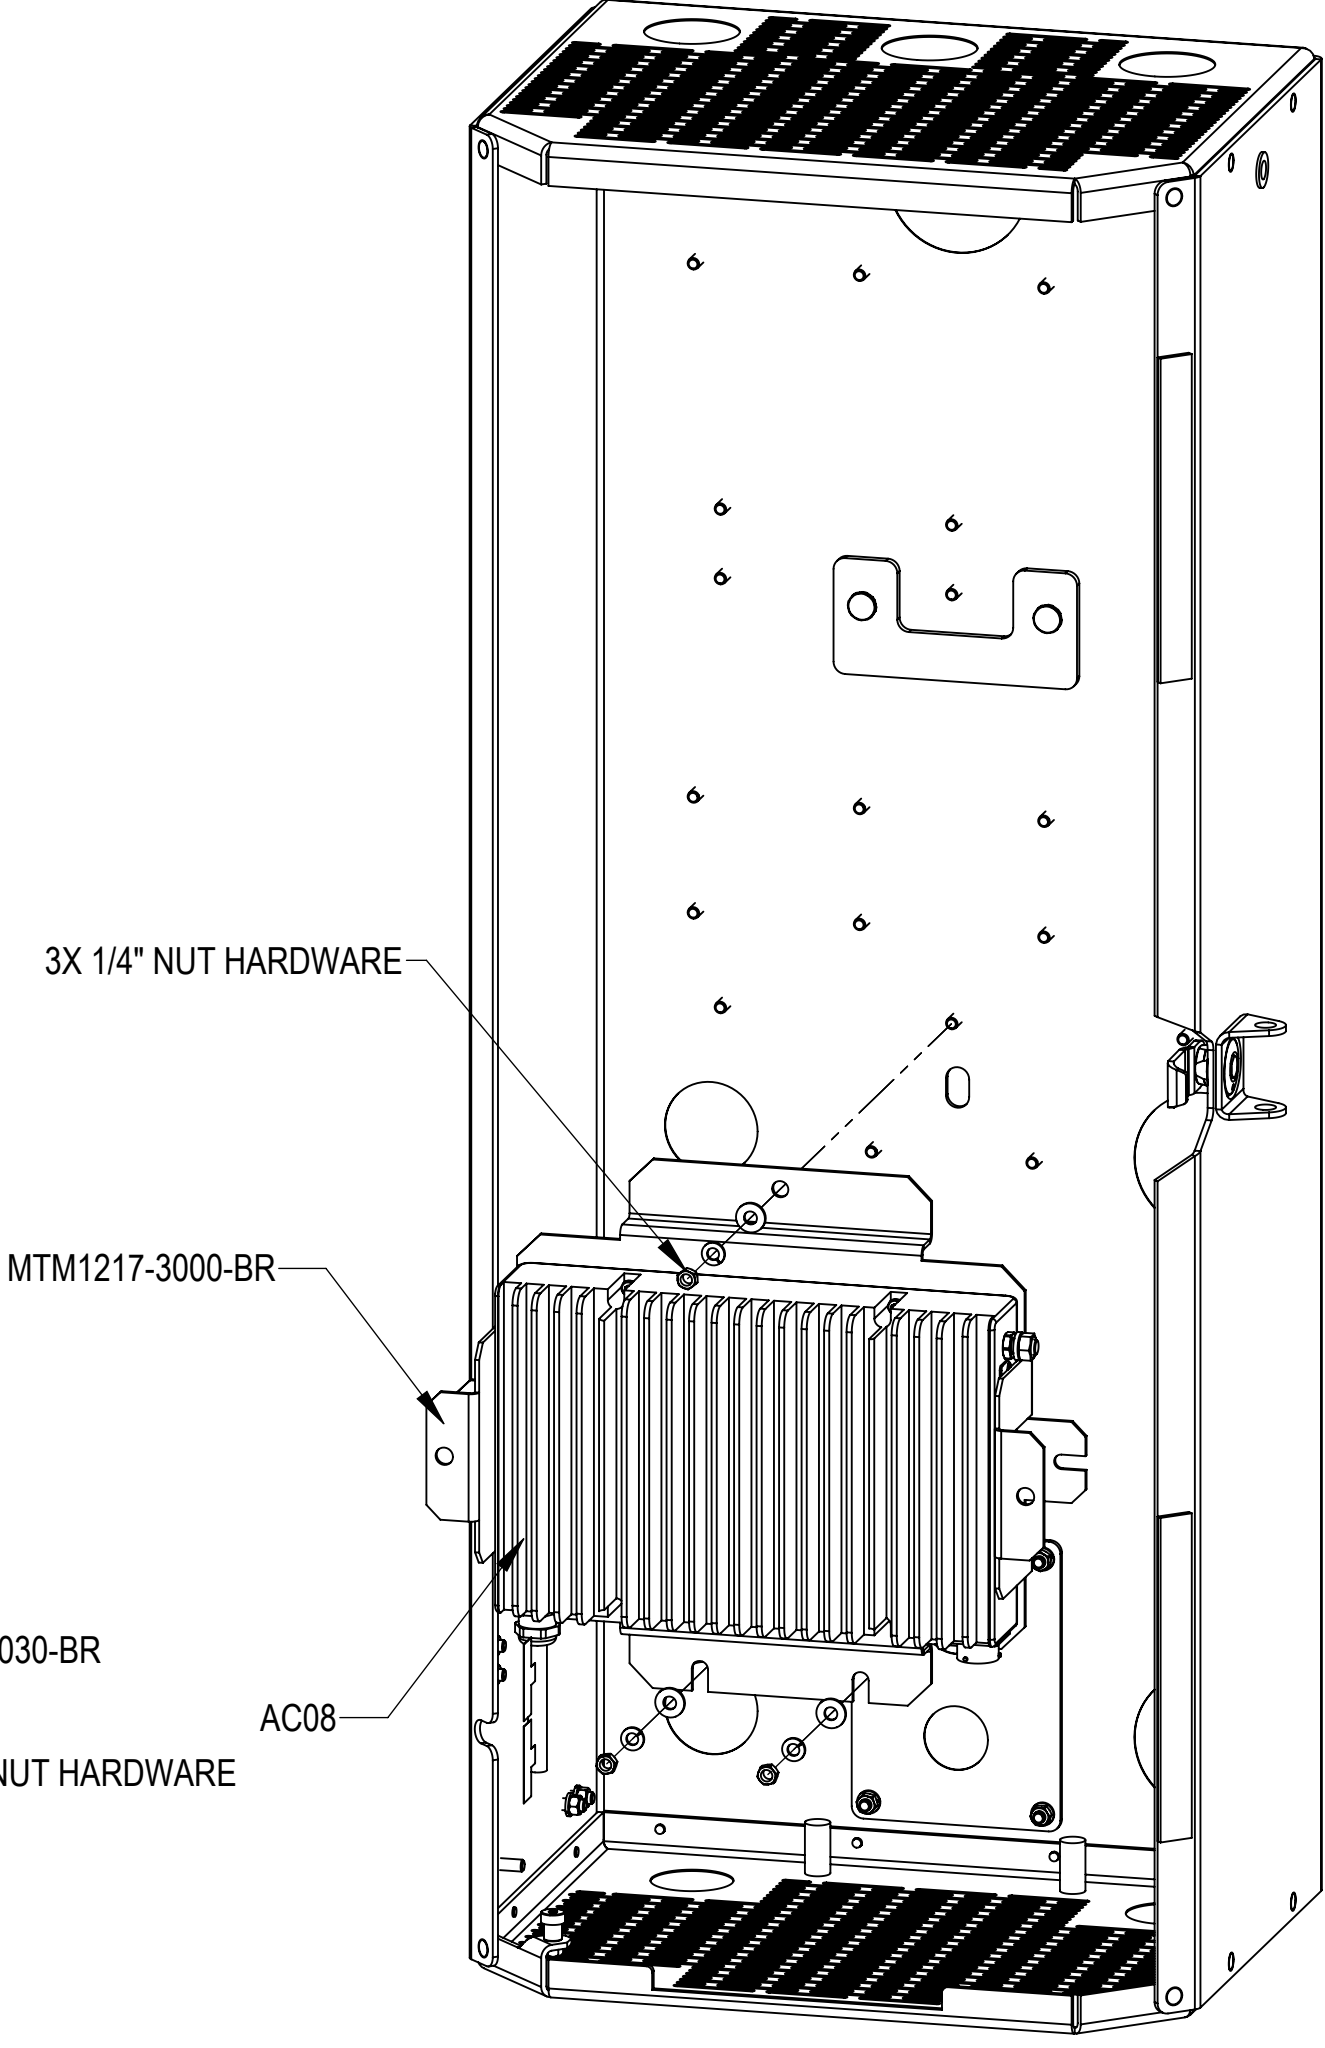

STEP 2:

INSTALL PSU AC08 SUB-ASSEMBLY TO THE EQUIPMENT USING  
3 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN

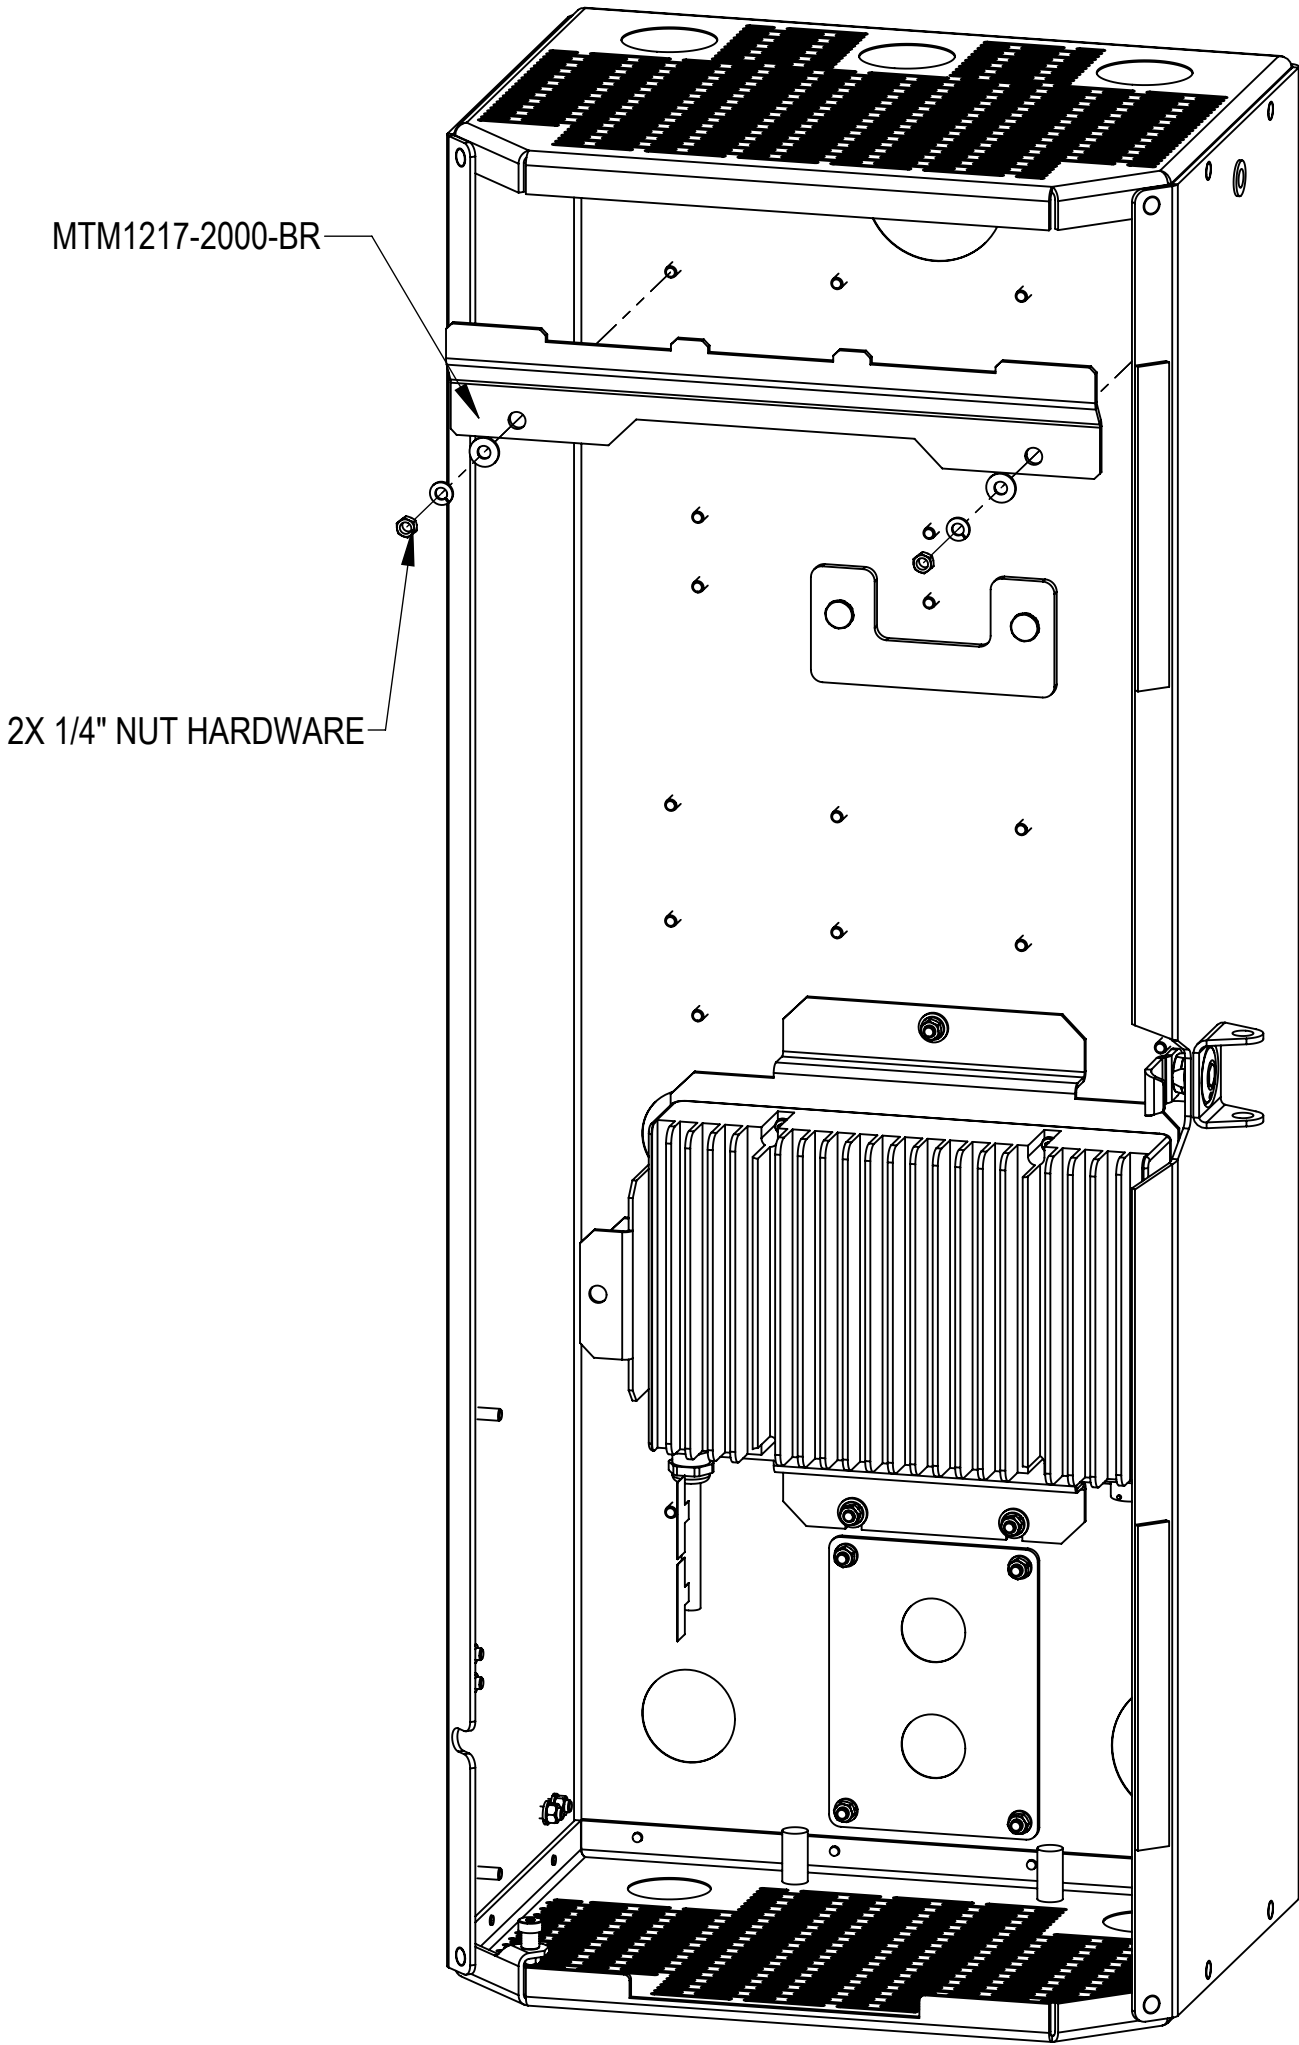


STEP 3:

INSTALL THE BRACKET MTM1217-2000-BR TO THE EQUIPMENT USING  
2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN

# Installation Instructions




CONFIGURATION 1 - 4471 AND AC08  
CONFIGURATION 2 - 4461 AND AC08

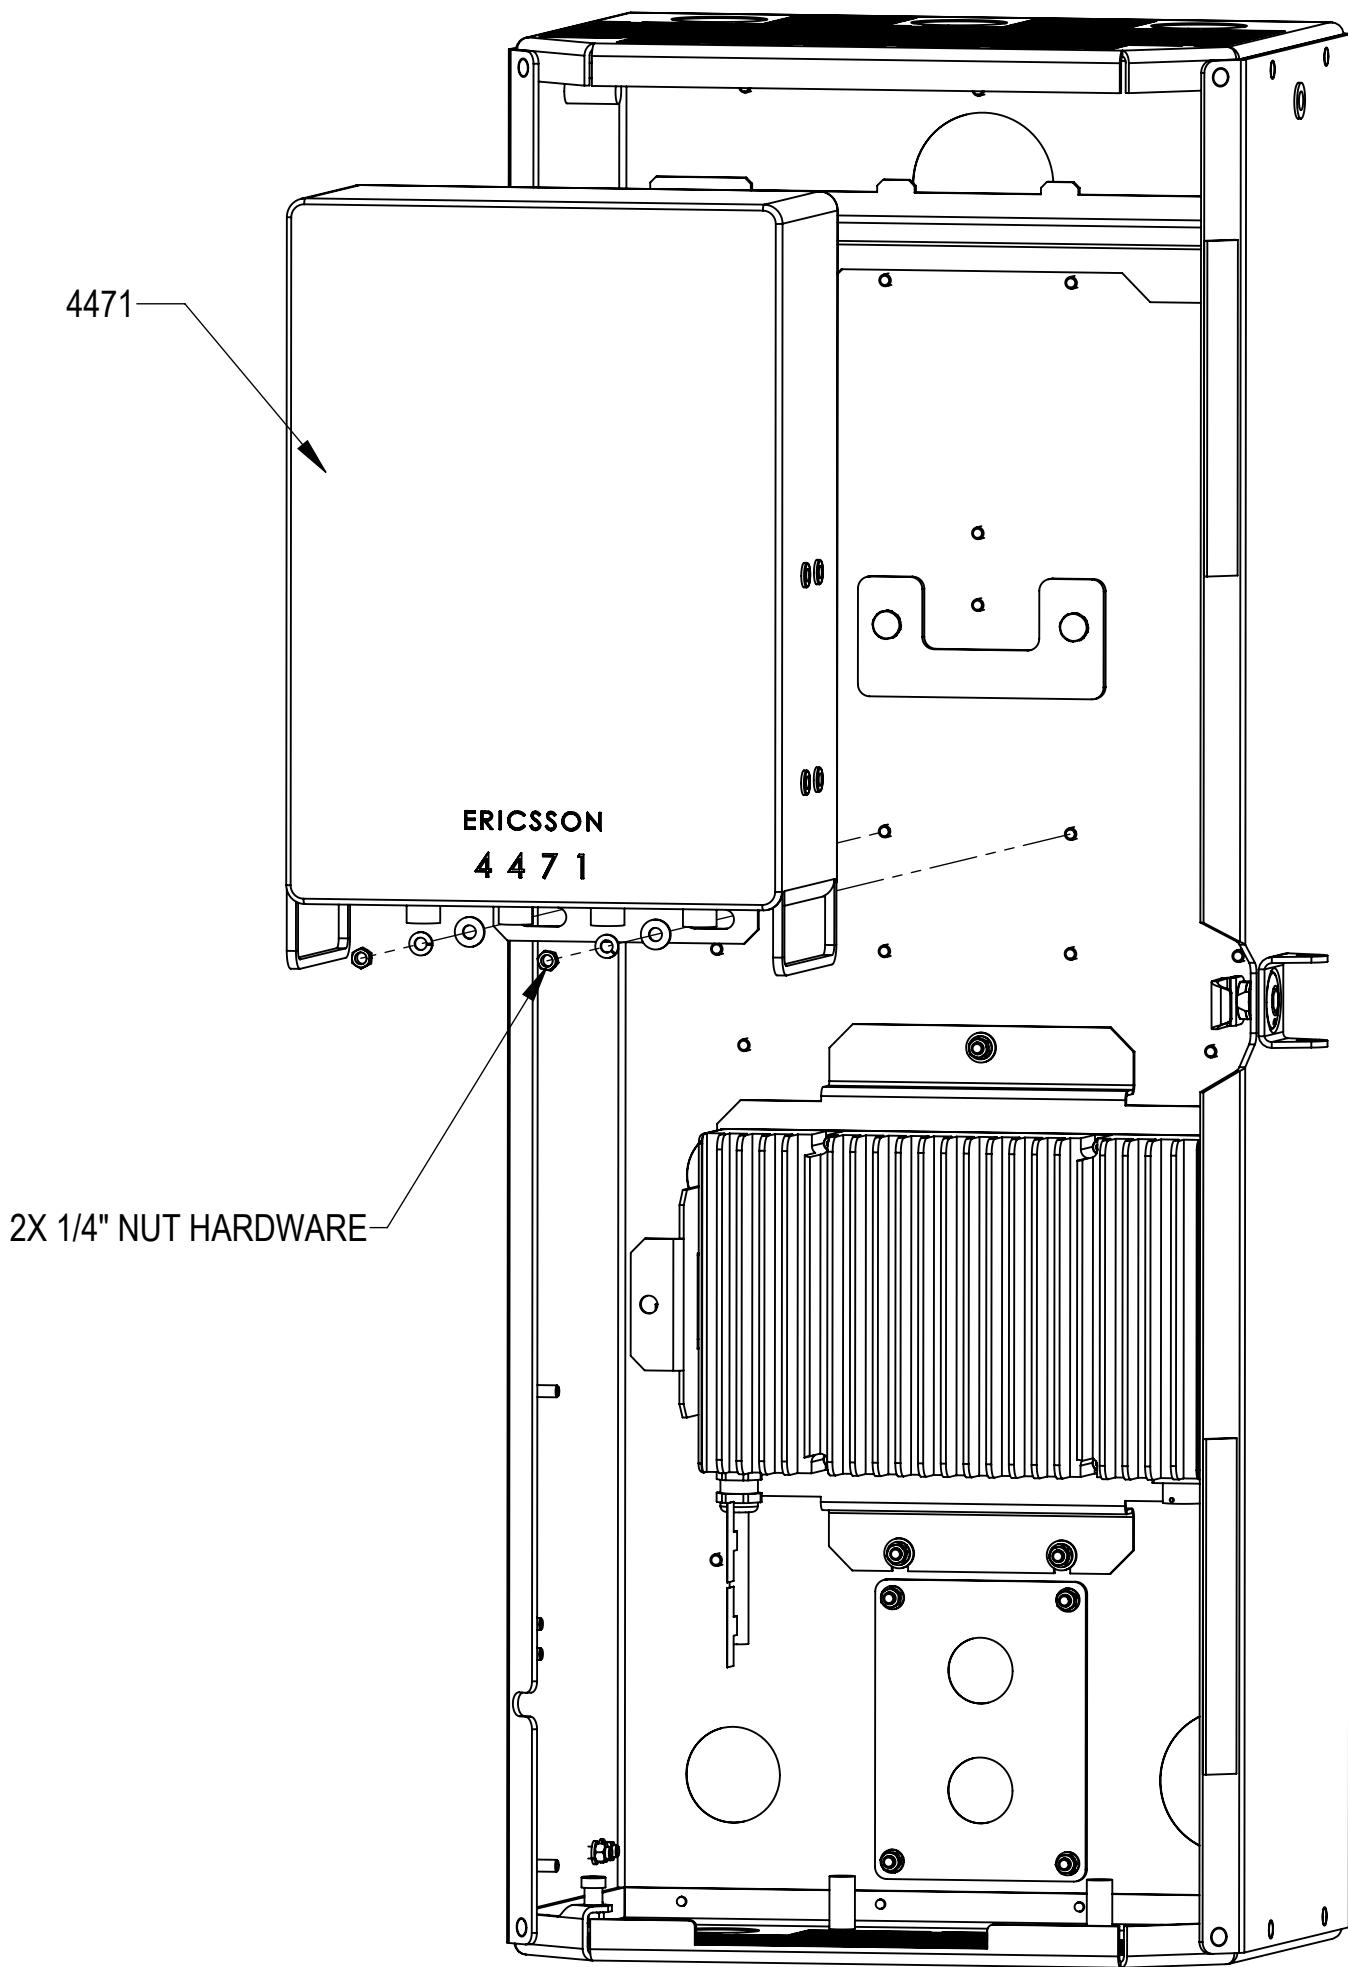

STEP 4 FOR CONFIGURATION 1:

HANG 4471 SUB-ASSEMBLY ON THE BRACKET MTM1217-2000-BR,  
SECURE USING 2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN

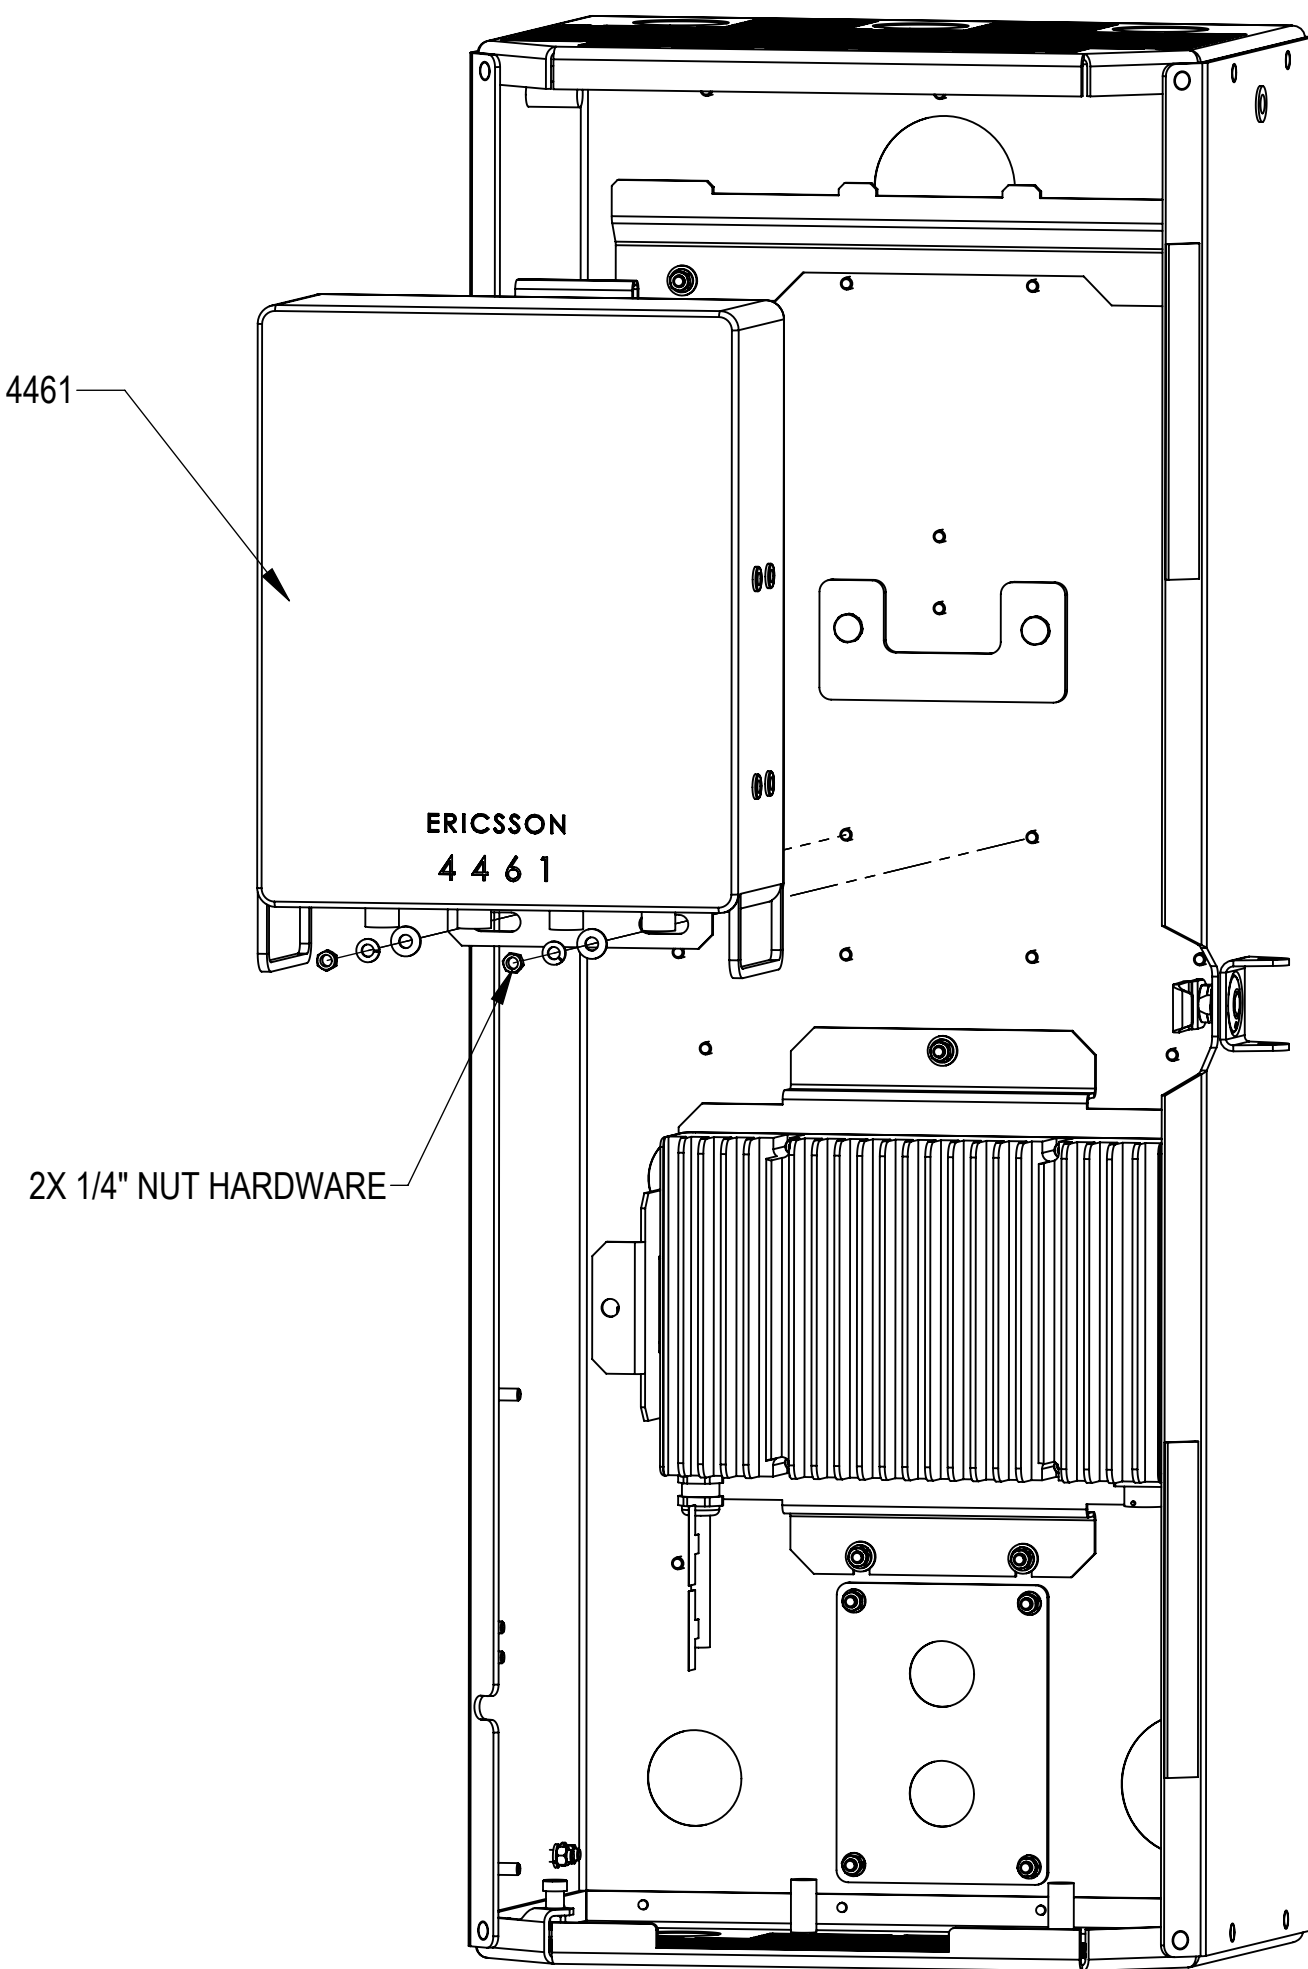

STEP 4 FOR CONFIGURATION 2:


HANG 4461 SUB-ASSEMBLY ON THE BRACKET MTM1217-2000-BR,  
SECURE USING 2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN



# Installation Instructions



## CONFIGURATION 3 - 4461, 4471 AND AC08

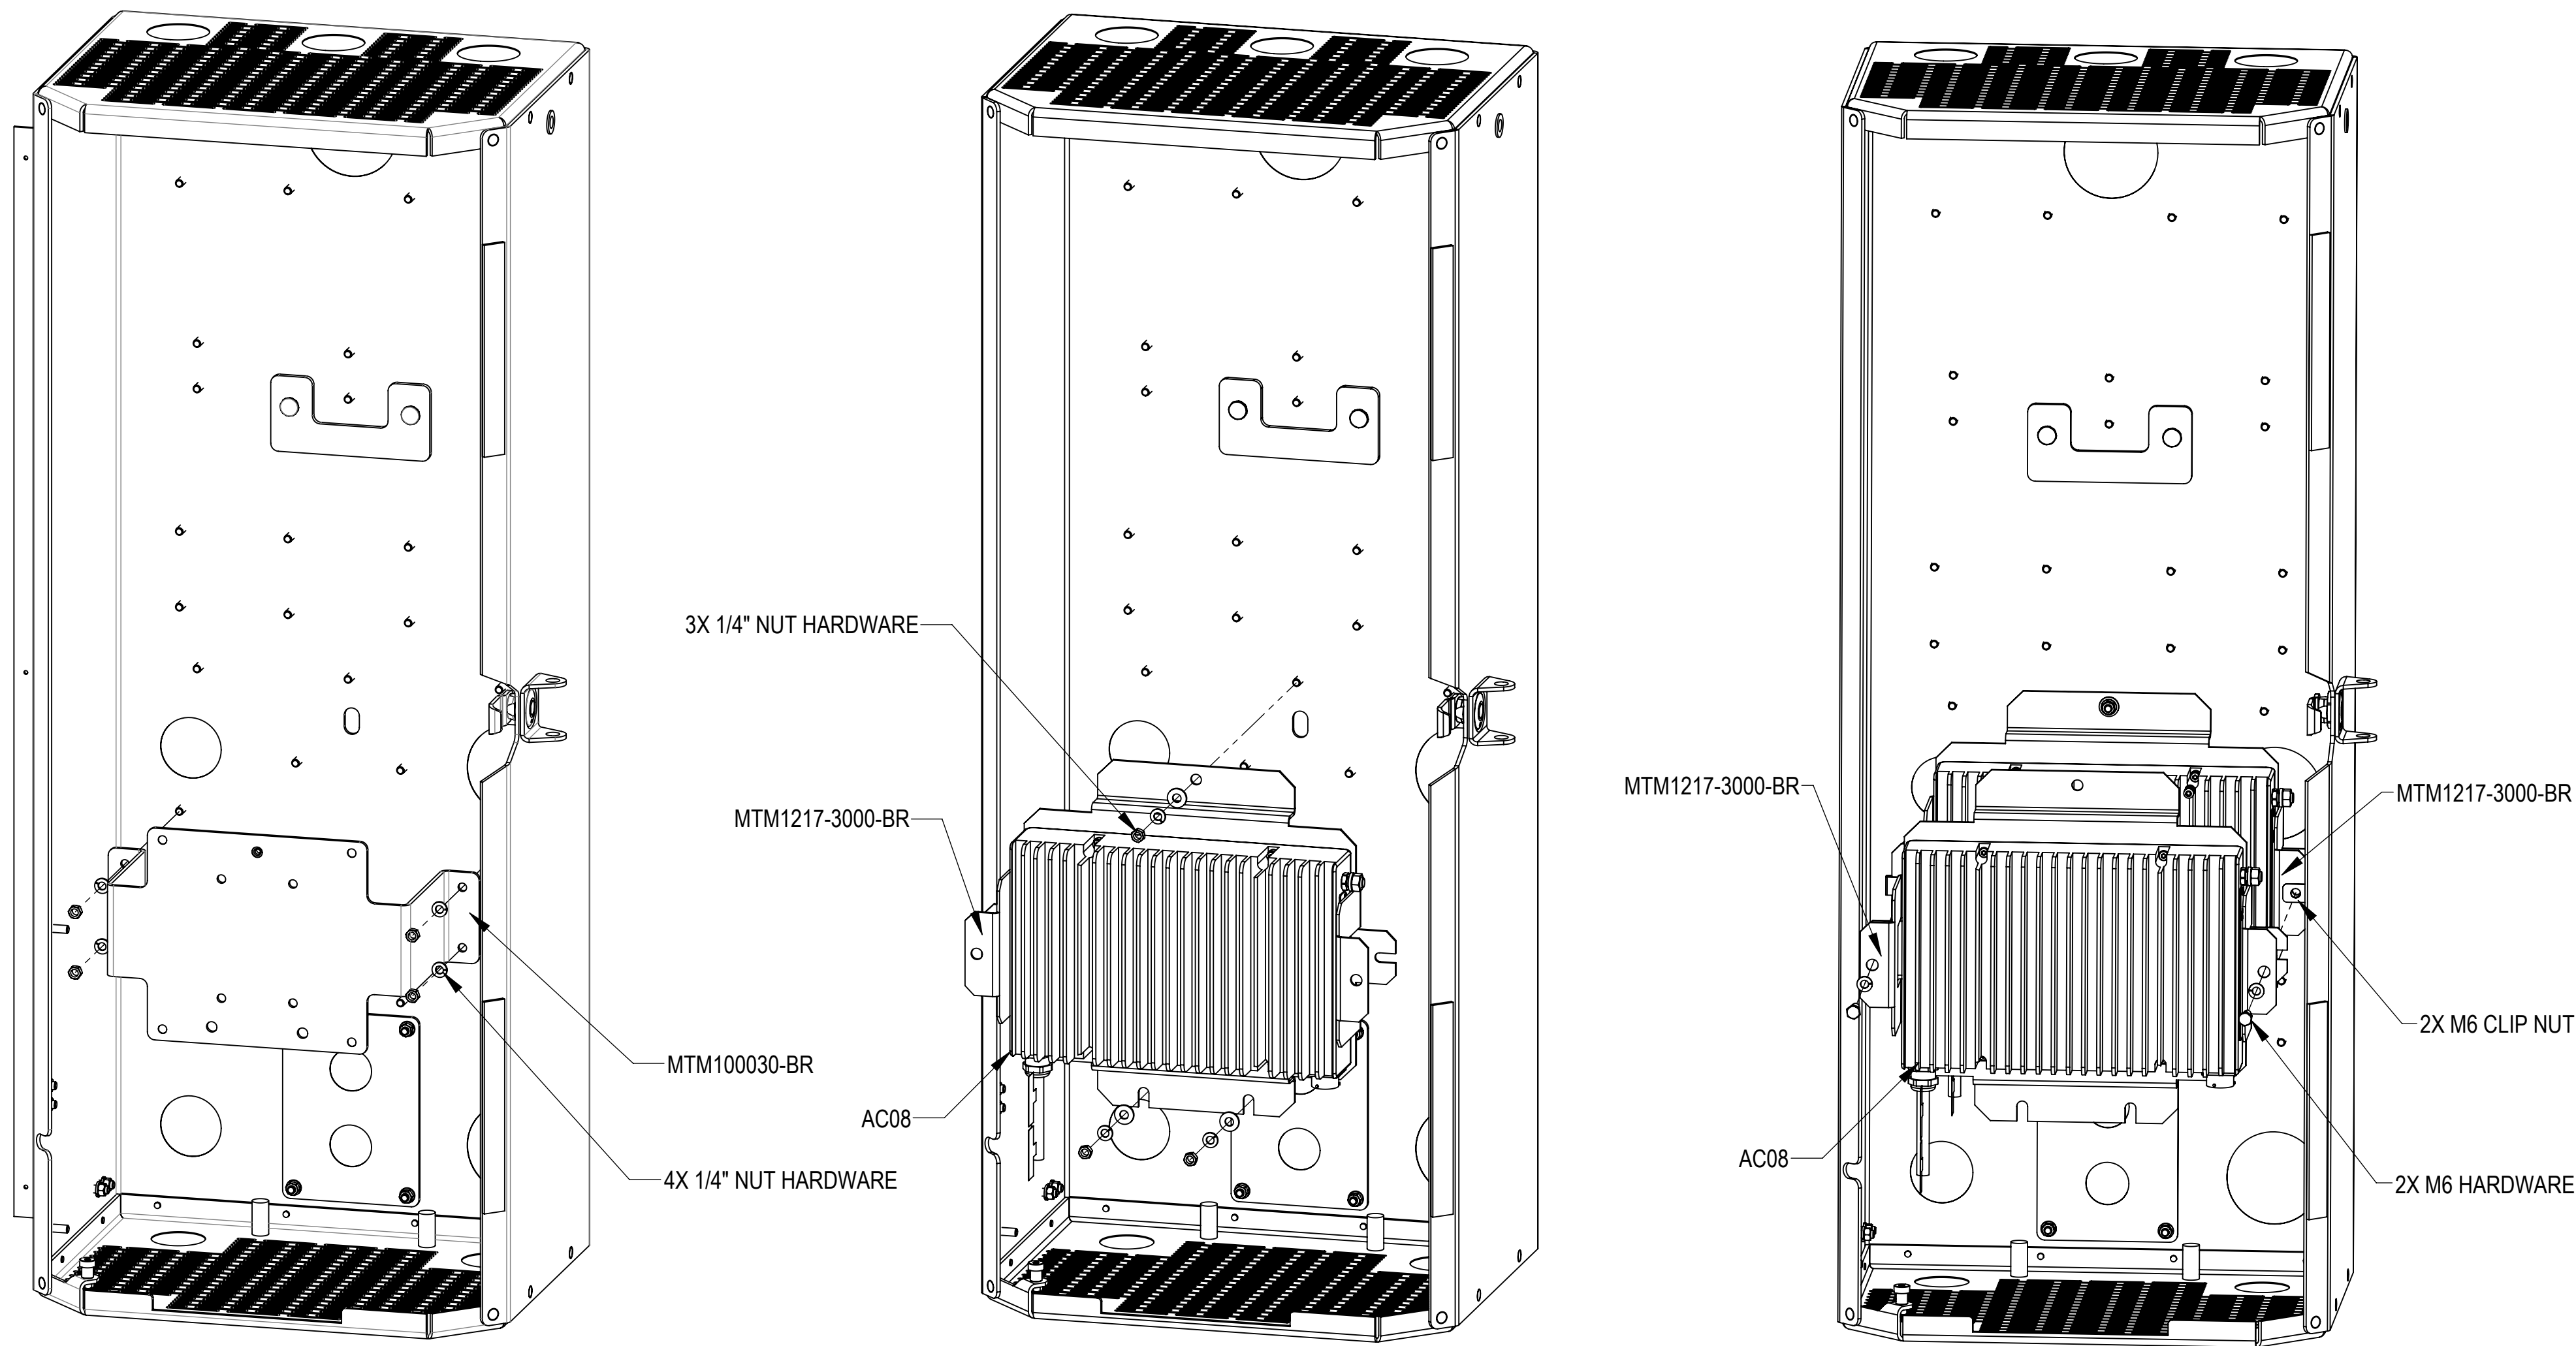

### STEP 1:

REMOVE THEM IF THE PICO ENCLURE HAS THE BRACKET  
MTM100030-BR & 1/4" NUT HARDWARE

### STEP 2:

INSTALL THE INNER PSU AC08 SUB-ASSEMBLY TO THE EQUIPMENT USING  
3 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN


### STEP 3:

INSTALL THE OUTER PSU AC08 SUB-ASSEMBLY TO THE BRACKET MTM1217-3000-BR  
USING 2 SETS OF M6 SCREW, LOCK WASHER, AND CLIP NUT AS SHOWN

# Installation Instructions




## CONFIGURATION 3 - 4461, 4471 AND AC08

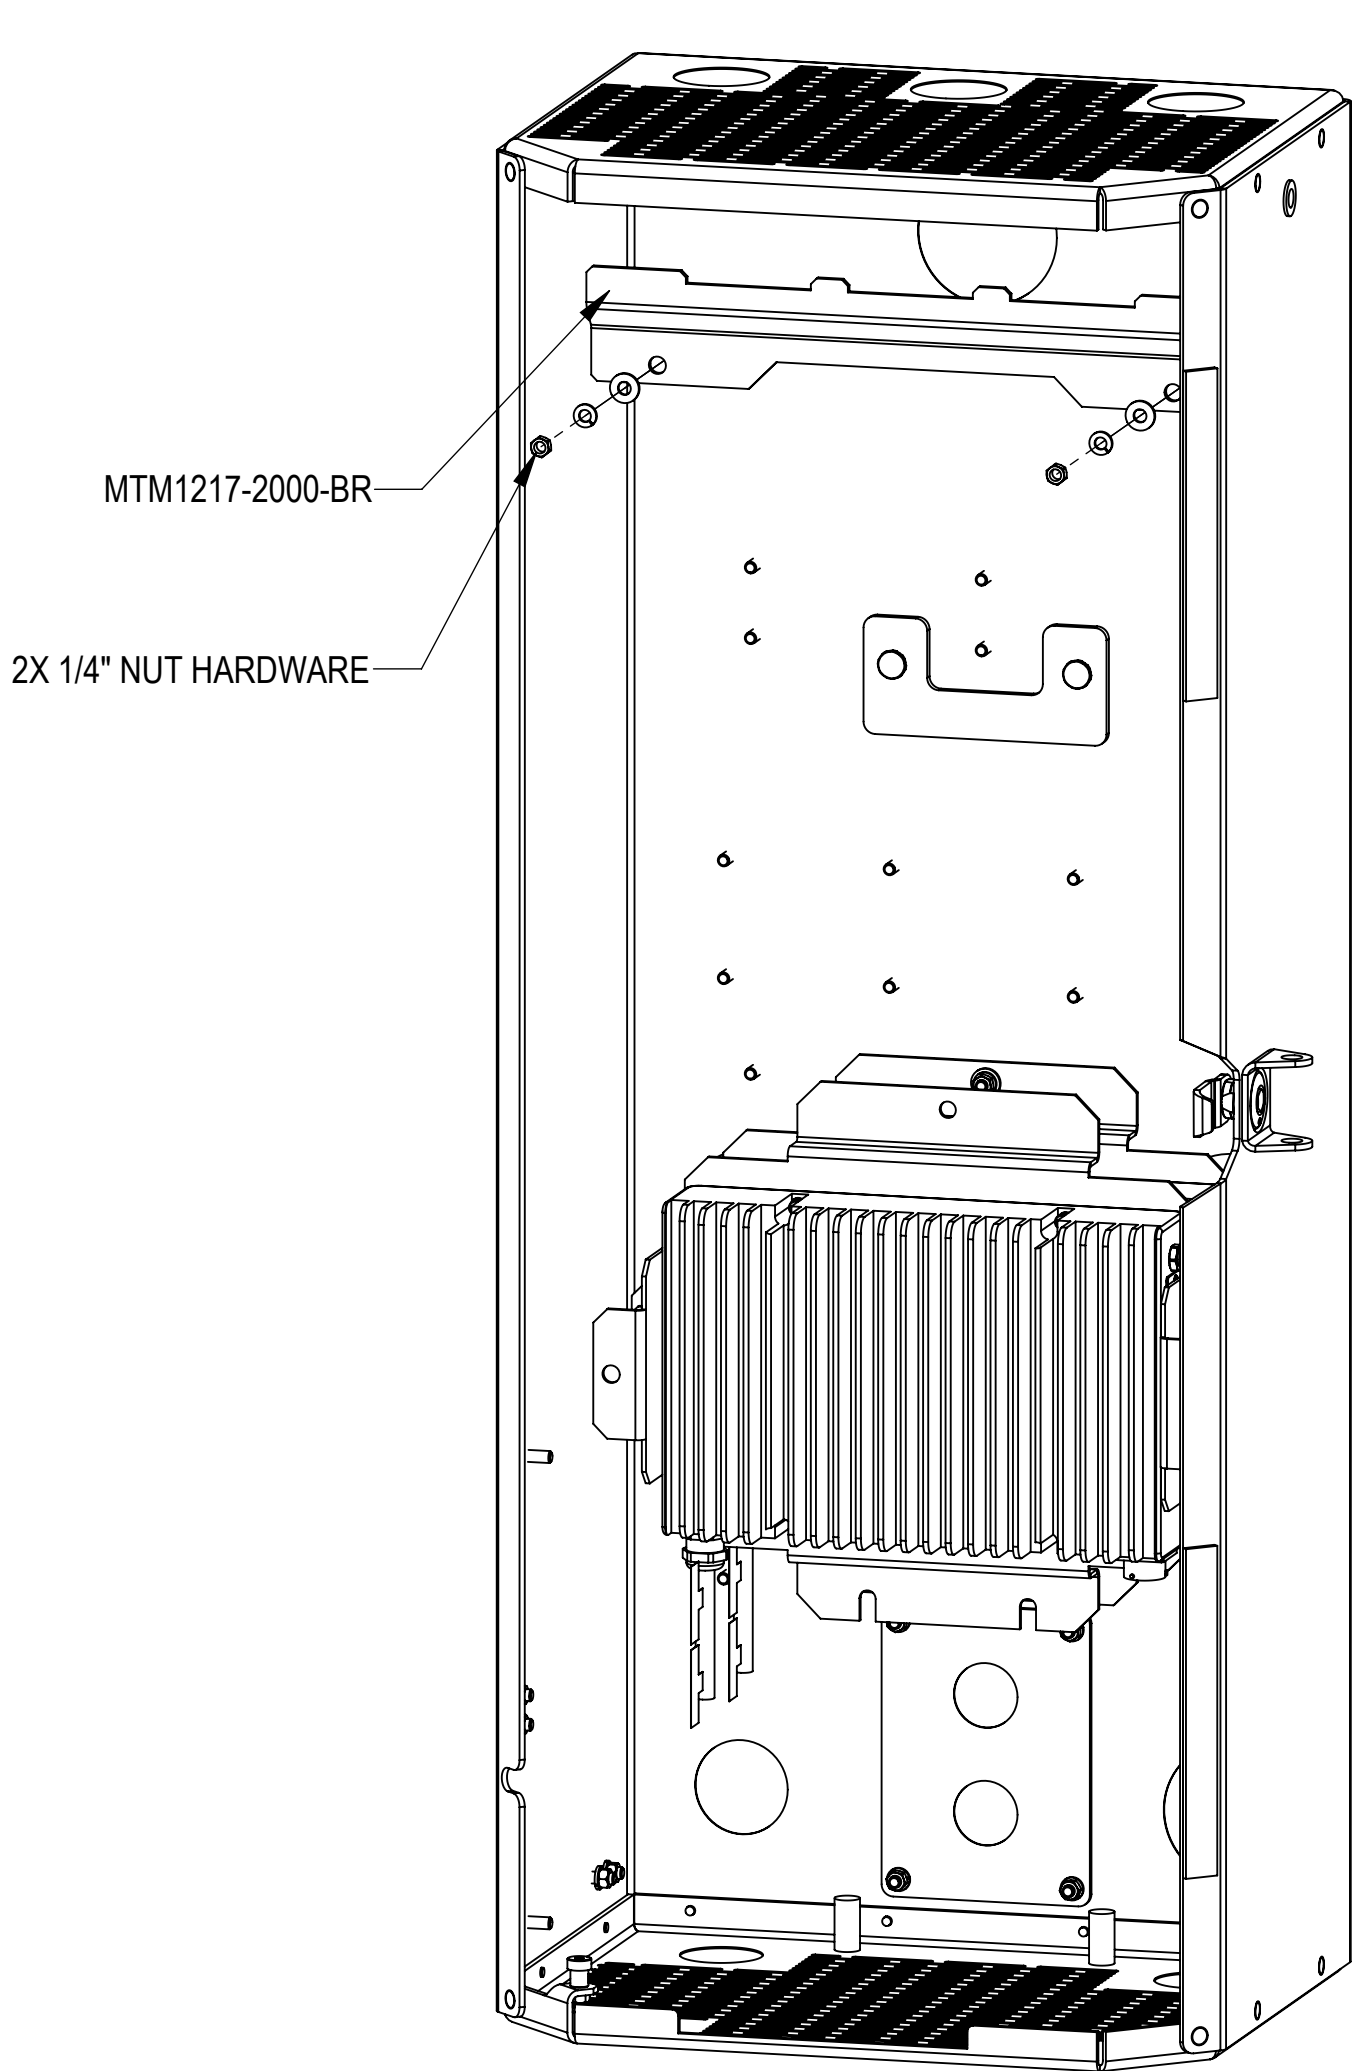


**STEP 4:**

INSTALL THE BRACKET MTM1217-2000-BR TO THE EQUIPMENT USING 2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN

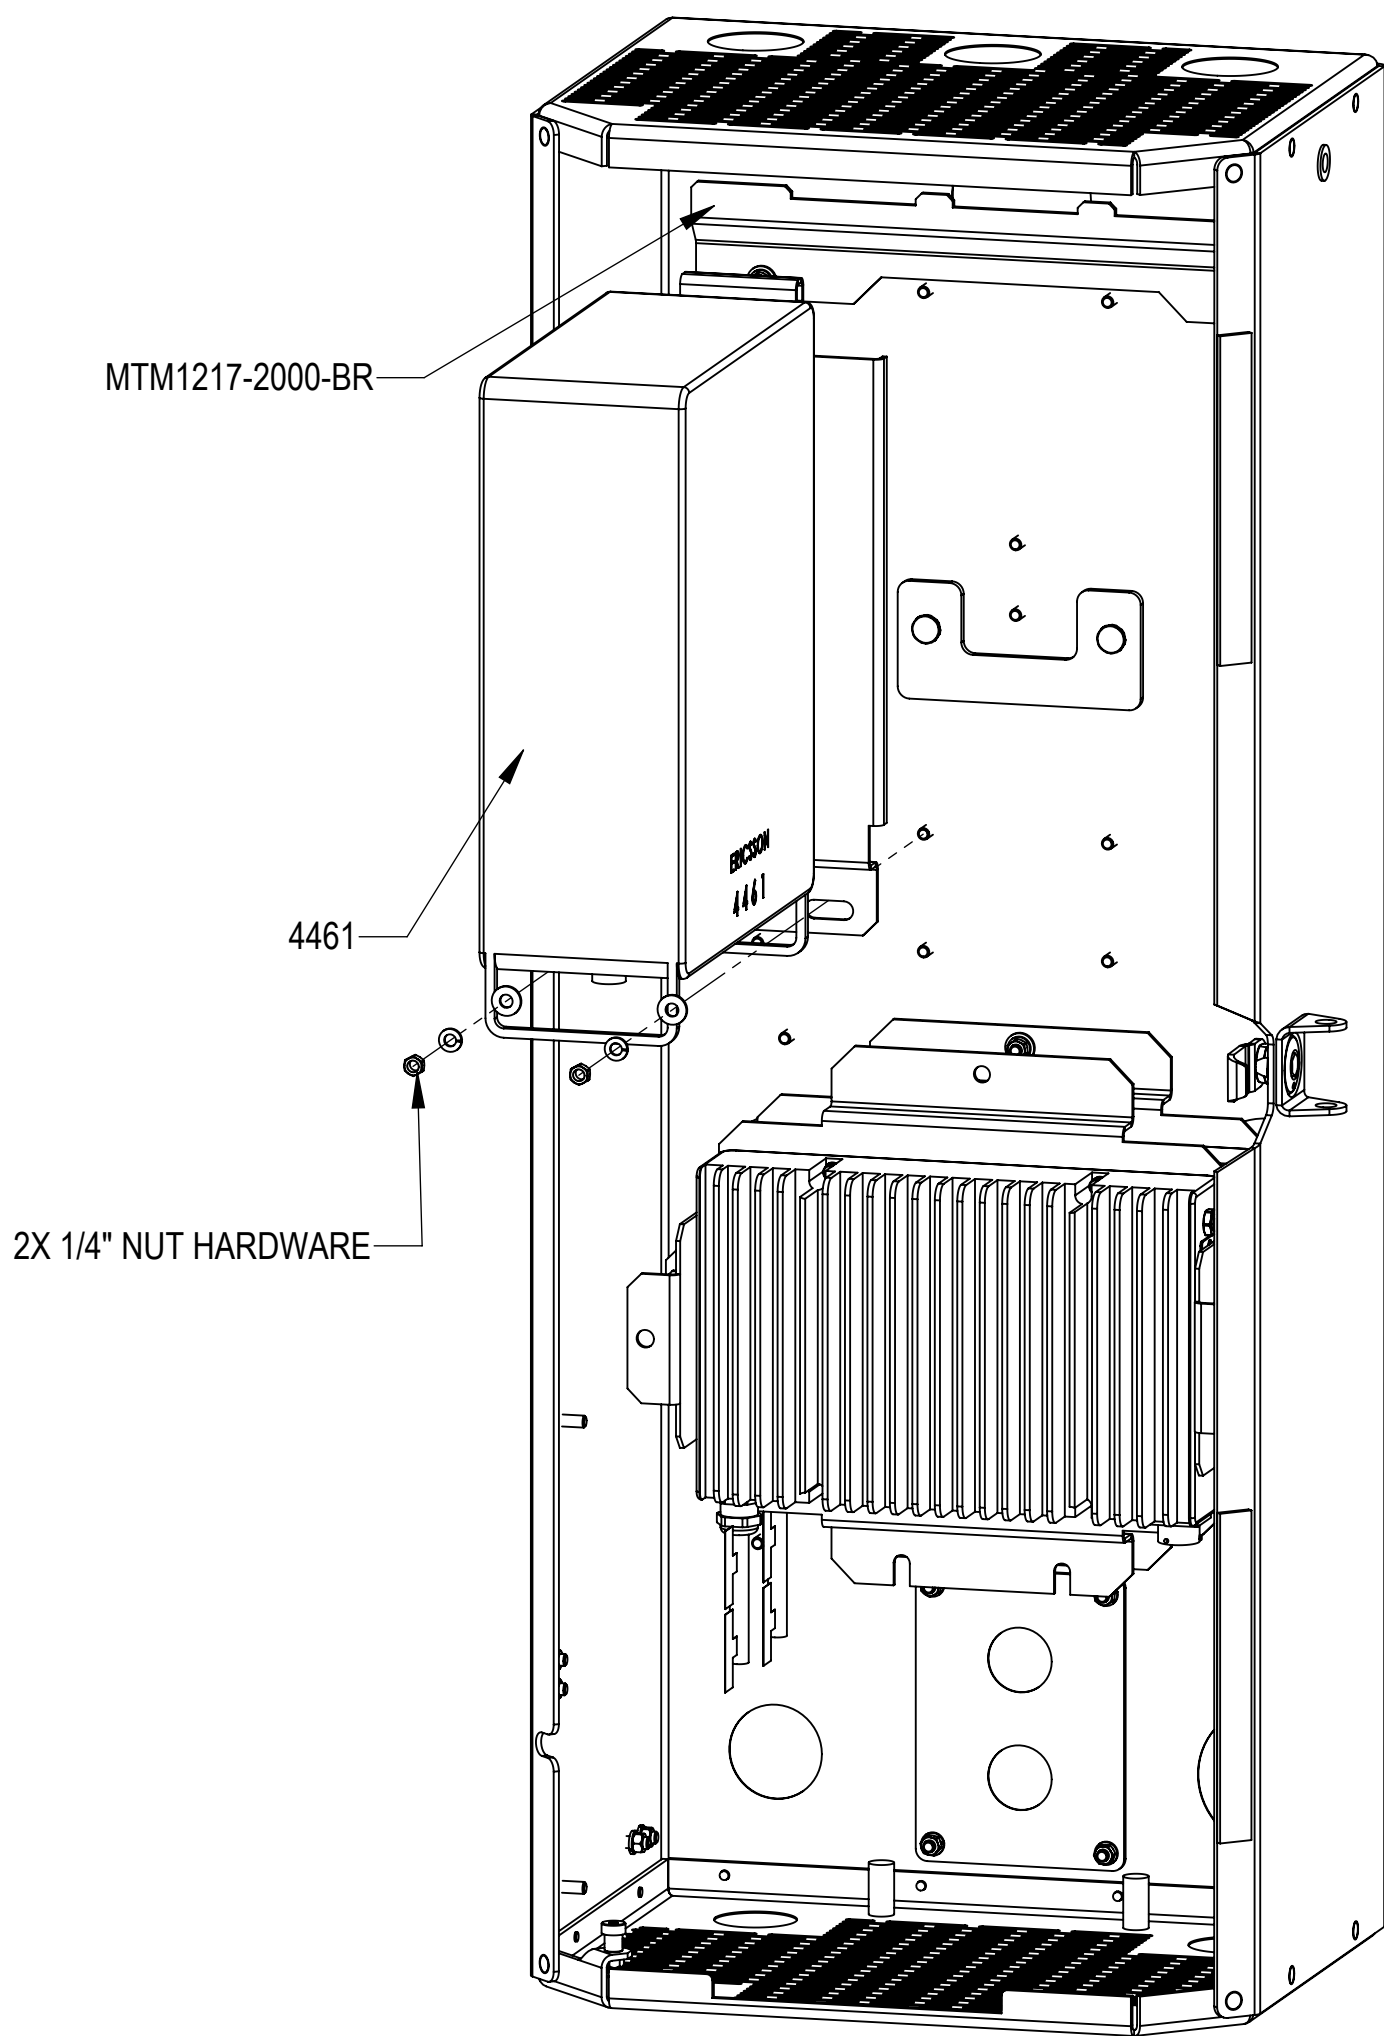

**STEP 5:**

HANG 4461 SUB-ASSEMBLY ON THE BRACKET MTM1217-2000-BR, SECURE USING 2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN

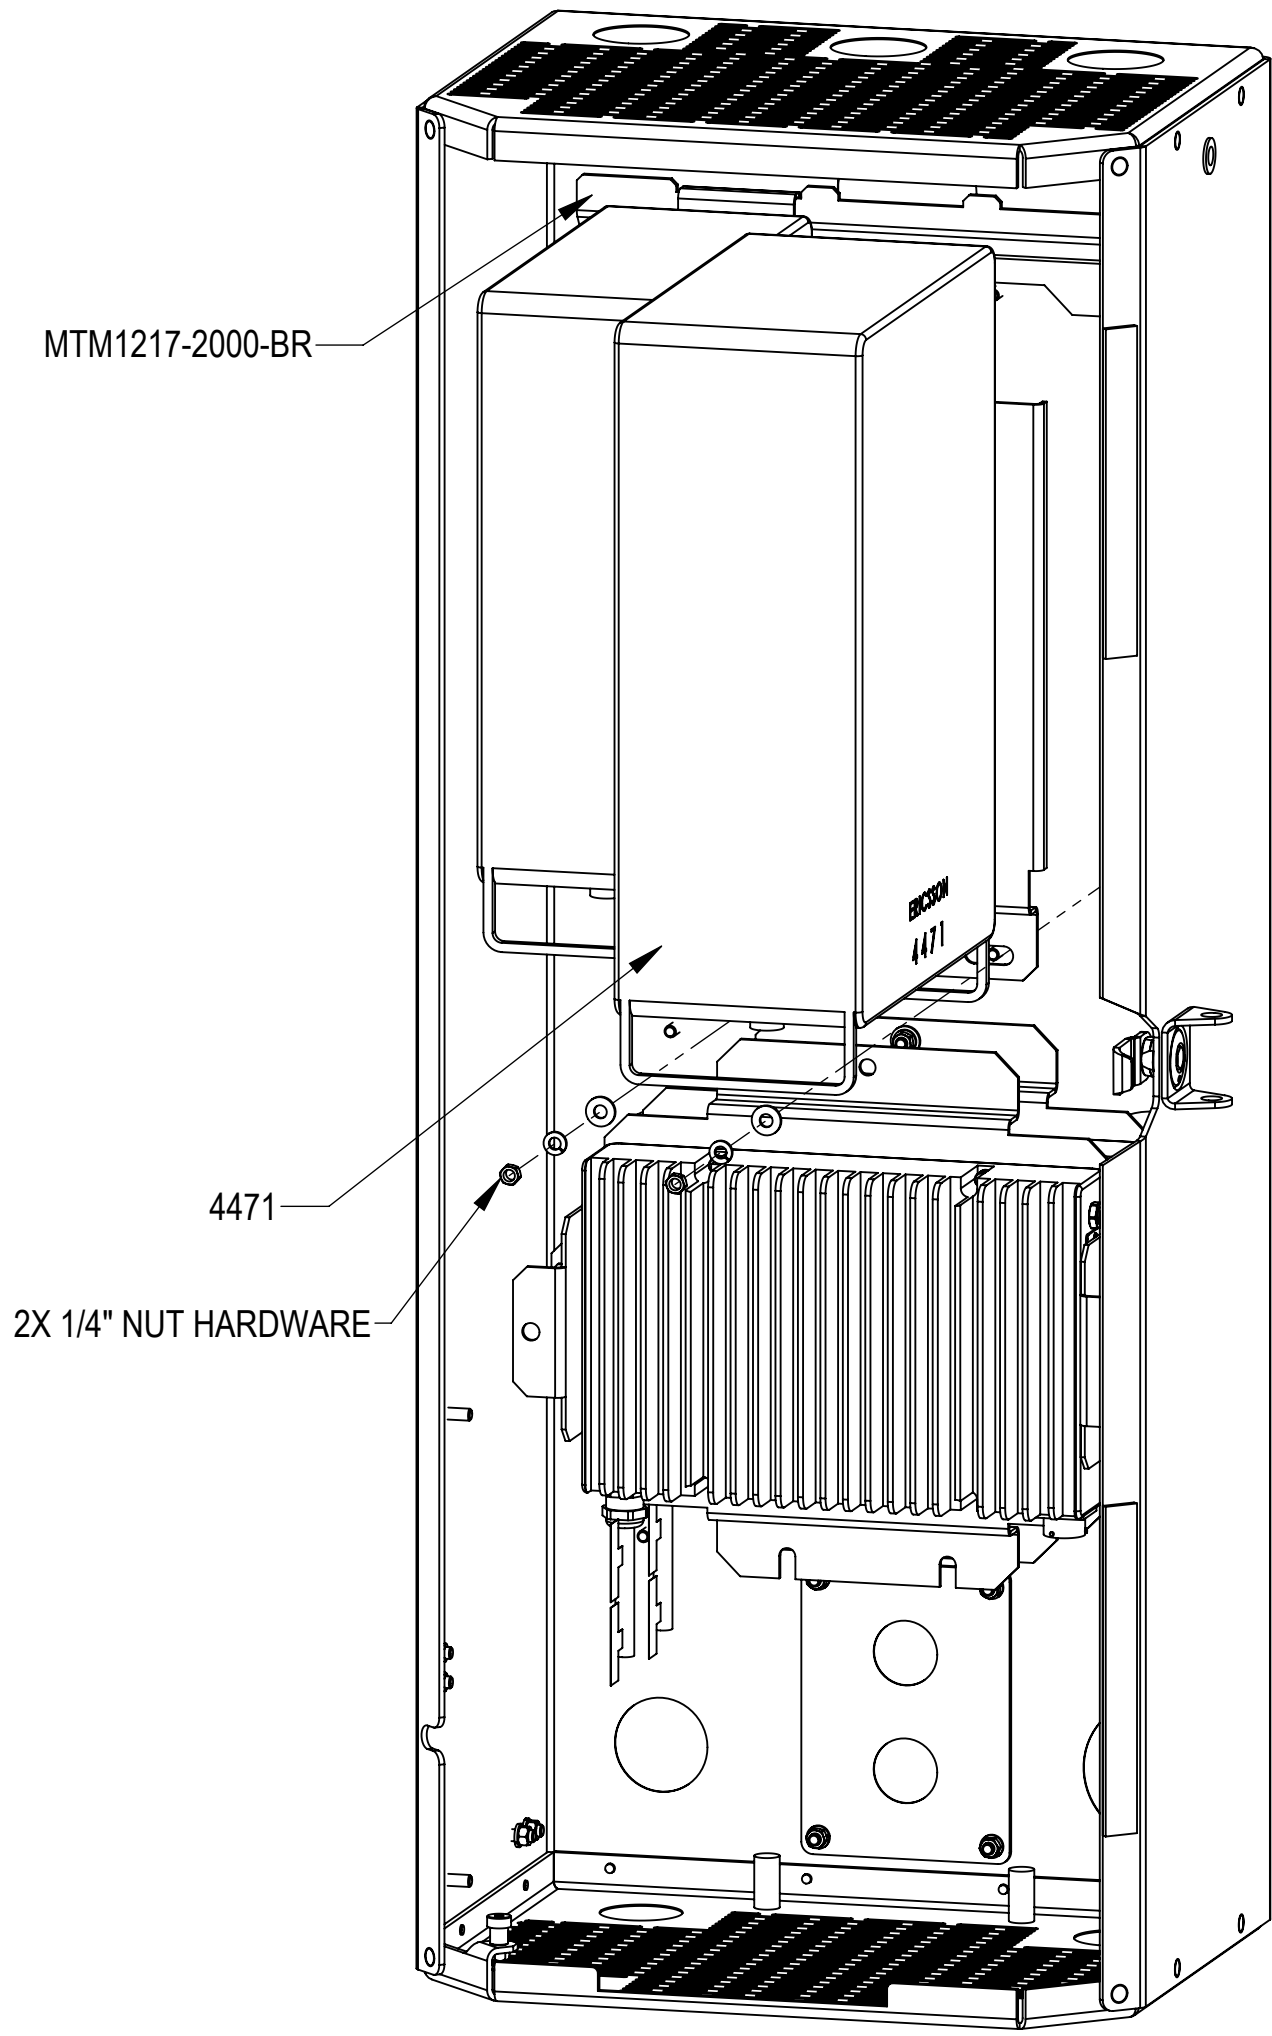

**STEP 6:**

HANG 4471 SUB-ASSEMBLY ON THE BRACKET MTM1217-2000-BR, SECURE USING 2 SETS OF 1/4" LOCK WASHER, FLAT WASHER AND NUT AS SHOWN