

# S8B0-D8-A00D00-00 | CMC8S



Empty CMC8S 1x 300W HVAC, 1x 300W Heater, Outdoor Equipment Cabinet

The cabinet is designed to house rack mounted equipment. This includes DC power systems, Fiber storage/splice trays, cell site routers, batteries, and other rack mounted equipment. This cabinet provides mechanical and environmental protection for the equipment inside.

- Excellent Thermal Performance with a HVAC
- Provides mounting space for power distribution, network servers, batteries, or other equipment.
- Front door compatible with Pad Lock.
- Provides flexible access for the cable entrances.
- One built-in 300w heater for cold environments.
- Optional battery tray (Integration Program only)
- Provides 8RU of 19” Rack Space for Equipment
- Common parts available across the same platform.
- Additional options available through our Integration Program - For more information, consult local sales manager for details

## Product Classification

Regional Availability	Latin America   North America
Product Type	Micro cell site enclosure
Product Series	CMC
Warranty	For more information, please consult our Product Warranty guidelines

## General Specifications

Access	Front door   Removable panel
Alarm Type	Door alarm   HVAC alarms (including high temperature, failure)   S2 module, 20P or standard and user defined alarms
Color	Light Gray (RAL 7035)
Cooling	Air conditioned
Door Security	Hasp and staple
Door Type, front	Hinged   Turn latch
Grounding Connection	Standard
Mounting	H-frame   Pad   Plinth   Universal pole mount   Universal wall mount

# S8B0-D8-A00D00-00 | CMC8S


---

Noise Emission, maximum	65 dBA
Power Supply Compatibility	6302
Rack Type	EIA 19 in
Rack Units	8

## Dimensions

Height	635 mm   25 in
Width	609.6 mm   24 in
Width, Battery	0 mm   0 in
Width, Battery Compartment	0 mm   0 in
Depth	609.6 mm   24 in

Dimension Drawing

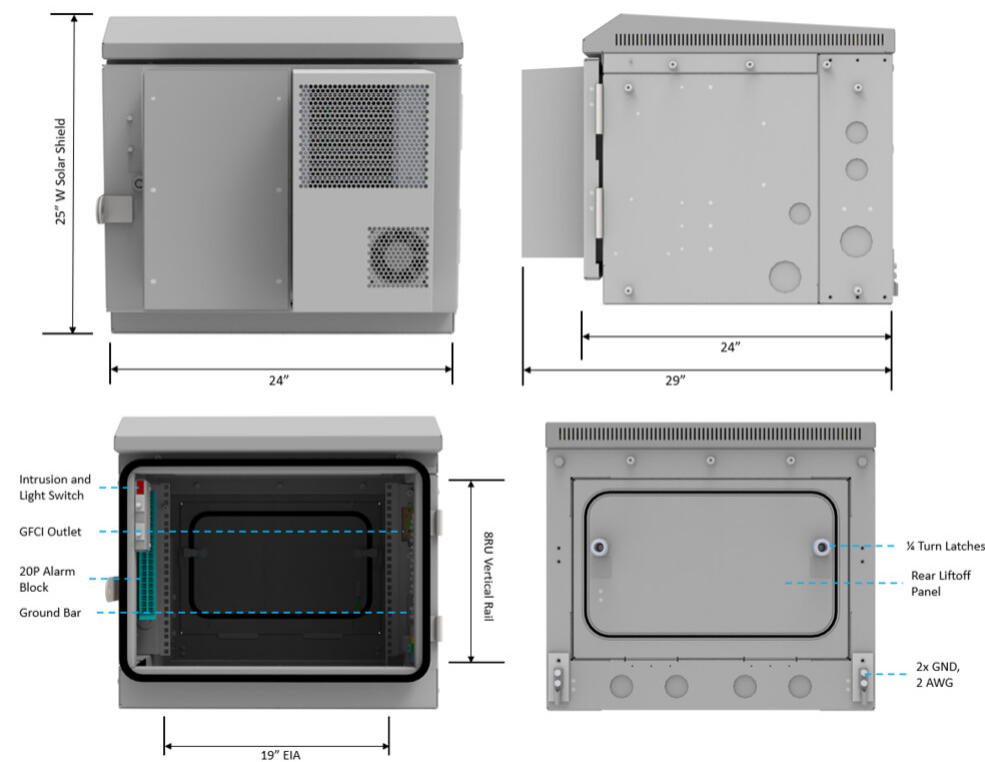

Electrical Specifications

Alarm Output	Dry contacts
Cooling Capacity	300 W
dc Distribution Type	19" Rack DC Distribution Panels or DIN Breakers
Voltage	-48 Vdc

Material Specifications

Finish	Powder coated   UV resistant
Material Type	Aluminum

Environmental Specifications

Operating Temperature	-40 °C to +46 °C (-40 °F to +115 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Above ground   Outdoor   UV resistant for outdoor   Wireless installation

# S8B0-D8-A00D00-00 | CMC8S

---

Qualification Standards	GR-3108 class 4   IP55   NEMA, Type 4   Telcordia GR-1089-CORE   Telcordia GR-487   UL/ETL Type 3R
Safety Standard	UL   cUL
Thermal Compliance	GR-487

## Packaging and Weights

Packaging quantity	1
Weight, net	47.627 kg   105 lb

## \* Footnotes

Warranty	For more information, please consult our Product Warranty guidelines
----------	--