

# RRV4-65D-R6VB-V601



12-port sector antenna, 4x 694–960 and 8x 1695–2690 MHz, 65° HPBW, 6x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

## General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

## Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	1 female   1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2)   Mid band (4)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W
Protocol	3GPP/AISG 2.0 (Single RET)

## Dimensions

# RRV4-65D-R6VB-V601

Width	469 mm   18.465 in
Depth	198 mm   7.795 in
Length	2580 mm   101.575 in
Net Weight, without mounting kit	43.7 kg   96.342 lb

## Array Layout

Y2

Y4

Y1

Y3


R1

R2

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxR1
R2	694-960	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxR2
Y1	1695-2690	5 - 6	65°	3	AISG1	CPxxxxxxxxxxxxY1
Y2	1695-2690	7 - 8	65°	4	AISG1	CPxxxxxxxxxxxxY2
Y3	1695-2690	9 - 10	65°	5	AISG1	CPxxxxxxxxxxxxY3
Y4	1695-2690	11 - 12	65°	6	AISG1	CPxxxxxxxxxxxxY4

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

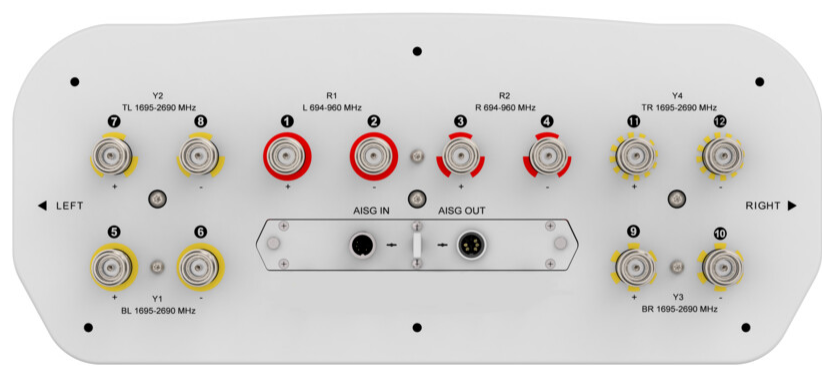

## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz   694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,000 W

# RRV4-65D-R6VB-V601

## Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y1-Y4	Y1-Y4	Y1-Y4	Y1-Y4
Frequency Band, MHz	698-806	790-894	890-960	1695-1995	1920-2300	2300-2500	2490-2690
RF Port	1-4	1-4	1-4	5-12	5-12	5-12	5-12
Gain, dBi	16.2	16.8	17	16.6	16.8	16.8	17
Beamwidth, Horizontal, degrees	65	64	63	67	65	63	58
Beamwidth, Vertical, degrees	8.6	7.7	7.2	7	6.3	5.6	5.3
Beam Tilt, degrees	2-12	2-12	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	18	20	20	15	18	22	21
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	27	27	30	29	29	27	26
CPR at Boresight, dB	26	30	27	24	21	19	19
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150
Input Power per Port, maximum, watts	250	250	250	200	200	200	200

## Mechanical Specifications

Wind Loading @ Velocity, frontal	709.0 N @ 150 km/h (159.4 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	383.0 N @ 150 km/h (86.1 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	753.0 N @ 150 km/h (169.3 lbf @ 150 km/h)
Wind Speed, maximum	200 km/h (124 mph)

## Packaging and Weights

Width, packed	540 mm   21.26 in
Depth, packed	275 mm   10.827 in
Length, packed	2850 mm   112.205 in
Weight, gross	58.2 kg   128.309 lb

## Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

# RRV4-65D-R6VB-V601

---

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
UK-ROHS	Compliant

## Included Products

BSAMNT-B92-07	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
---------------	---	---

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---