
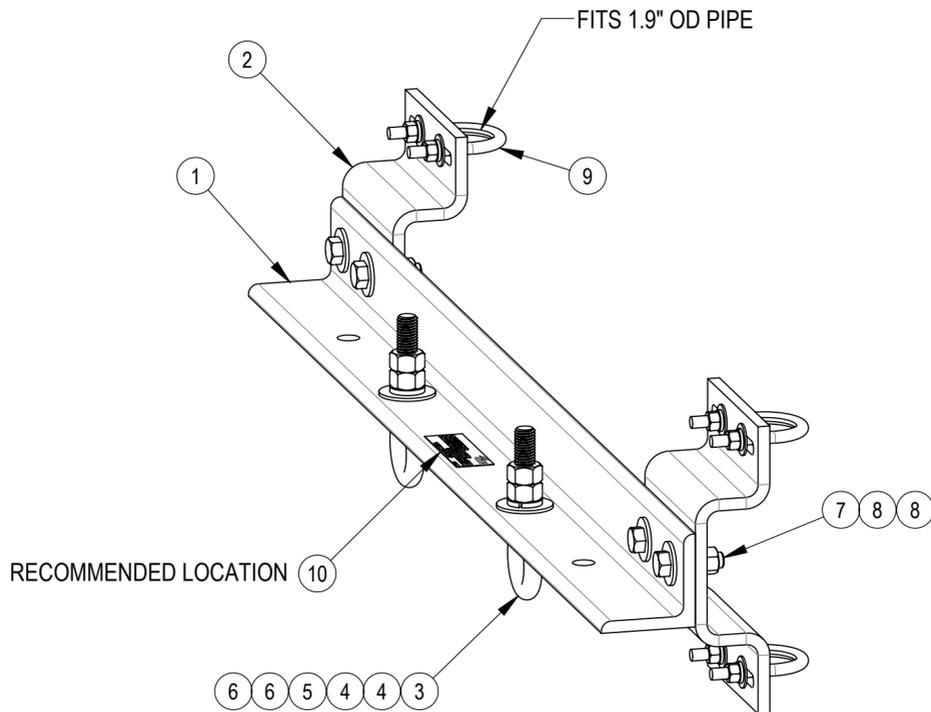


- 1.0 GENERAL NOTES
 - 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
 - 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
 - 2.1 ANY HAZARDS OR OBSTRUCTIONS TO THE CLIMBING FACILITY AND SAFETY CLIMB MUST BE IDENTIFIED PRIOR TO INSTALLING THE APPURTENANCE. ADDITIONAL PRODUCTS MAY BE REQUIRED TO MAINTAIN THE INTEGRITY OF THE SAFETY CLIMB. DURING INSTALLATION, TEMPORARY AND/OR PERMANENT PRECAUTIONARY MEASURES SHOULD BE TAKEN TO PRESERVE THE CLIMBING FACILITY AND/OR SAFETY CLIMB.
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
 - 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 4.0 TEST
- 5.0 PACKAGING
 - 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
 - 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
 - 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	LL1090 16NOV23	EB1063 40183094CMO
B	GB-04165 WAS GB-03145; GWF-04 WAS GWF-03	RY1002 11APR24	EB1063 40193135CMO
C	CHG EYEBOLTS LOCATIONS TO TWO INNER HOLES; CHG LOADING CAPACITY; CRATE CR150704 WAS BX15	RY1002 24MAY24	EB1063 40195891CMO
D	UPDATED MTC4165-LAB01	RY1002 14JUL25	BA1025 50103906AMO

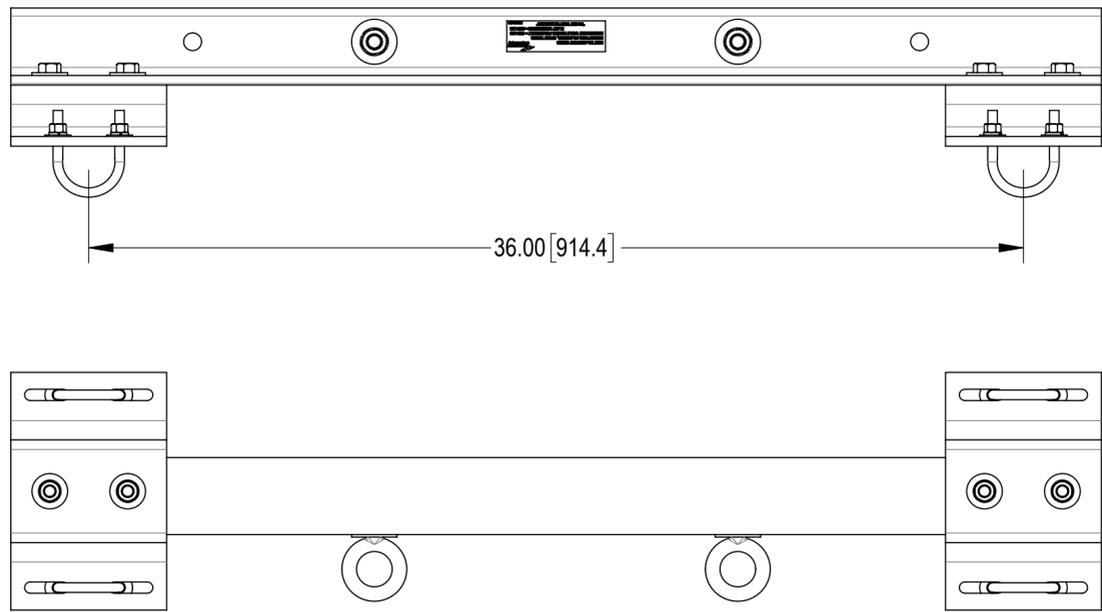

NOTE: -ANY ARRANGEMENTS OF THE EYEBOLTS IS ACCEPTABLE
-MAXIMUM NET CABLE WEIGHT
A -PER EYEBOLT = 1000 LBS
B -IN ANY COMBINATION = 2000 LBS
-NOT TO BE USED FOR HOISTING
-COMPETENT PERSON TO MAKE DETERMINATION OF USAGE ON THE STRUCTURE

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
 INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	MTC4165-036-00	36 INCH CROSSMEMBER GALVANIZED	1	24.61 LBS	
2	MTC4166-00	STEEL OFFSET BRACKET,GALV	2	7.44 LBS	
3	9674-1	BOLT,EYE,5/8X3,STL,GALV	2	0.08 LBS	
4	GWF-05	5/8" GALV FLAT WASHER, 1.7OD	4	0.06 LBS	
5	GWL-05	5/8" GALV LOCK WASHER	2	0.03 LBS	
6	GN-05	5/8" GALV HEX NUT	4	0.08 LBS	
7	GB-04165	1/2" X 1-3/4" GALV BOLT KIT	4	0.14 LBS	
8	GWF-04	1/2" GALV FLAT WASHER	8	0.04 LBS	
9	GUB3230	3/8" X 2" X 3" GALV U-BOLT	4	0.24 LBS	
10	MTC4165-LAB01	LABEL, HG ANCHOR,GUYED-TOWER	1	0.00 LBS	

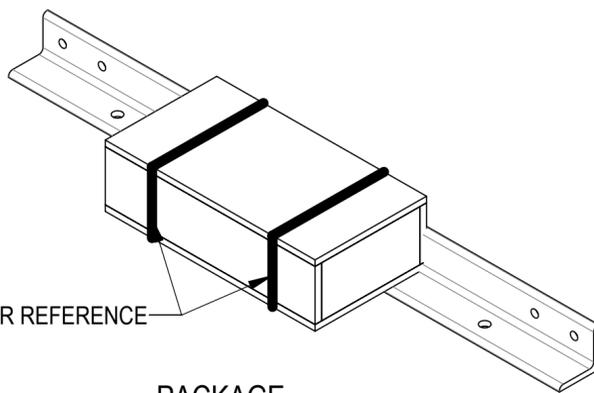

DENSITY	42.61	lbs/in ³
MASS	42.61	lbs
VOLUME	154.67	in ³
SURFACE AREA	1028.81	in ²
HEIGHT	7.36"	
LENGTH	9.00"	
WIDTH	42.00"	

Confidential

ANDREW® an Amphenol company

TOLERANCES: 1 PLACE .X[X] ± 0.2[6.3] 3 PLACE .XXX[X] ± 0.060[1.5] 2 PLACE .XX[X] ± 0.12[3.0] ANGLES ± 2°

SAP MATERIAL MASTER: 860674607-036

FINISH: MATERIAL:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994


NAME	DATE	TITLE
CE LL1090	16NOV23	HG ANCHOR,GUYED-TOWER,36" FACE
RW RY1002	07/14/2025	
AD BA1025	07/16/2025	
RE YMENG	08/05/2025	

SCALE: 1:8 DOCUMENT NO.: 860674607-036


ECN 50103906AMO

SIZE	Auth Group	INSL	MODEL	DRAWING			SHEET
C			04	RE	E	03	RE
			VERSION	STATUS	REVISION	VERSION	STATUS
			04	RE	E	03	D


1 OF 2

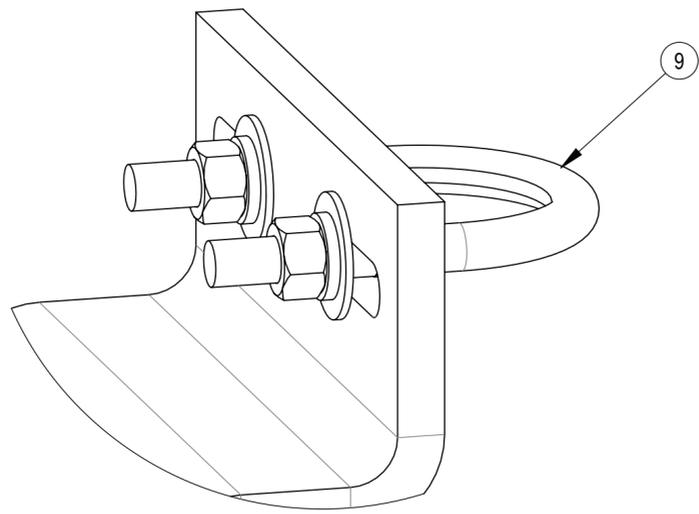


DETAIL A
SCALE 1 : 1

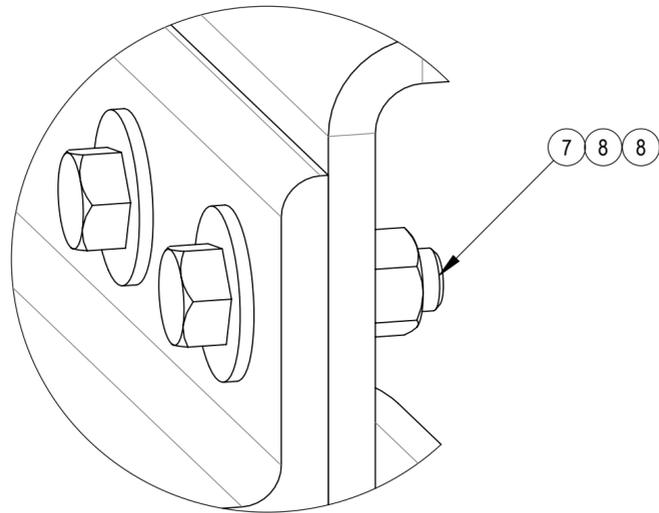

DETAIL B
SCALE 1 : 1

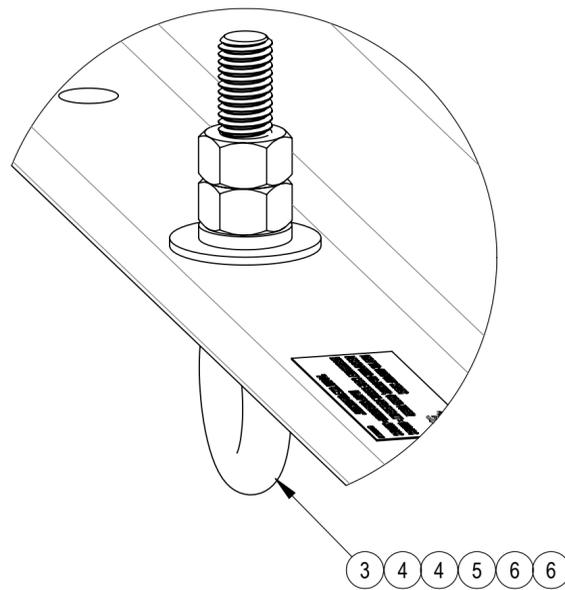

DETAIL C
SCALE 2 : 3

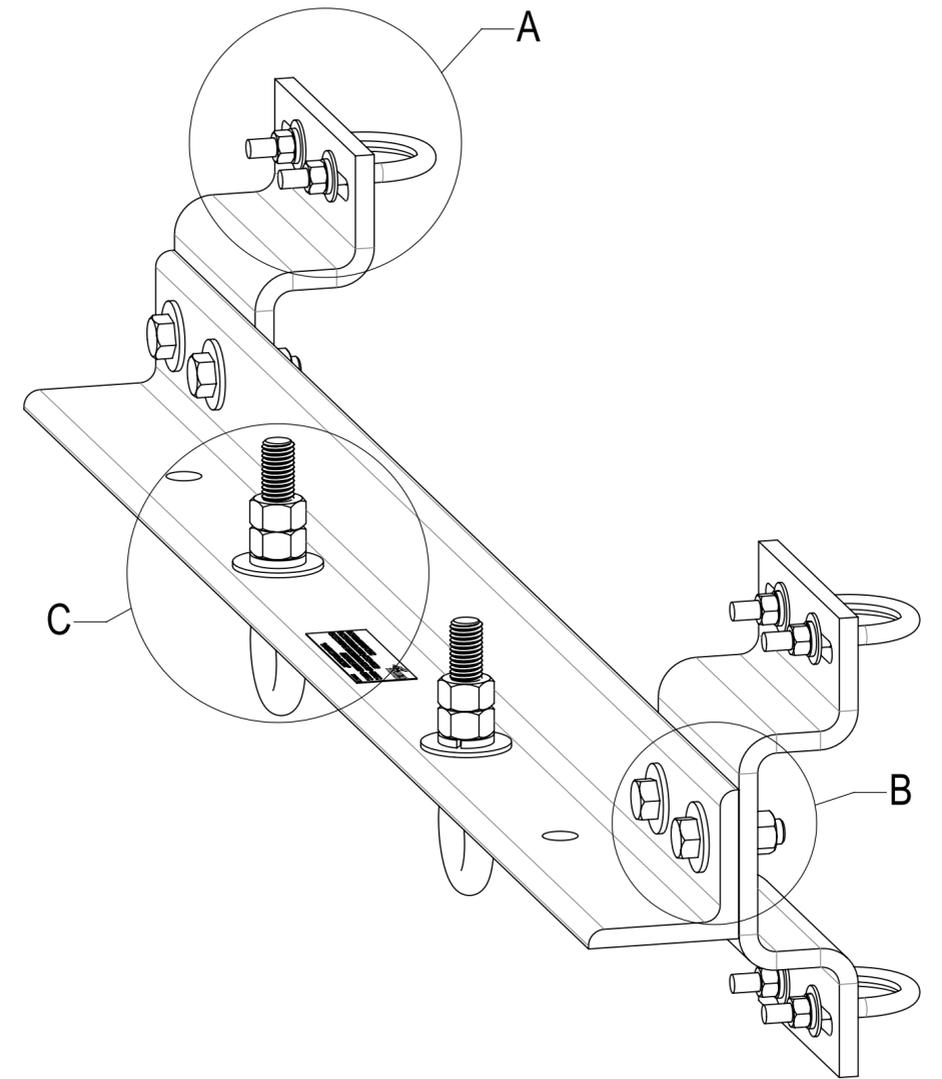

NOTE: -ANY ARRANGEMENTS OF THE EYEBOLTS IS ACCEPTABLE
-MAXIMUM NET CABLE WEIGHT
 A -PER EYEBOLT = 1000 LBS
 B -IN ANY COMBINATION = 2000 LBS
-NOT TO BE USED FOR HOISTING
-COMPETENT PERSON TO MAKE DETERMINATION OF USAGE
ON THE STRUCTURE

 ANDREW an Amphenol company					
TITLE HG ANCHOR, GUYED-TOWER, 36" FACE					
SIZE C	SCALE 1:5	DOCUMENT NO. 860674607-036			
 		DRAWING			SHEET 2 OF 2
		VERSION 03	STATUS RE	REVISION D	

Confidential