
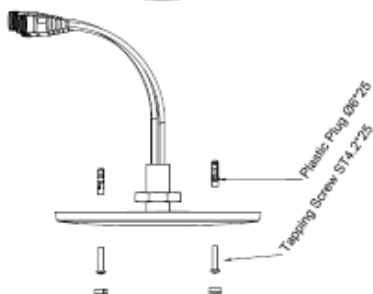




INSTALLATION INSTRUCTION FOR CMAX-OMF9-43-UWI53

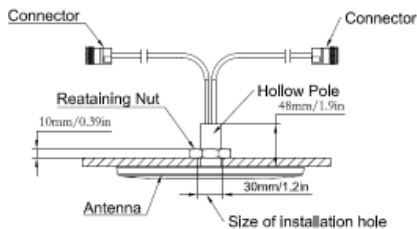

Installation Steps

- 1) Cut a hole in the ceiling tile with the diameter shown in the left picture.
- 2) Remove the retaining nut from the back of the antenna.
- 3) Feed these two pigtails of this antenna through the hole in the ceiling tile.
- 4) Re-install the retaining nut so that it is close-fitting to the ceiling tile.

- 1) Drill two holes in the ceiling per pattern of holes in this antenna shown in the left.
- 2) Fasten the flat side of this anchors (Plastic plug Ø6X25mm) and screws (tapping screw ST4.2X25mm).
- 3) Mount this antenna to the ceiling tile.

Note: The cable bending radius must not be less than 40 mm.

Version	Changes	Release Date
M0153A7A		07-May-2020
M0153A7B	- Rebranding and contact data updated; editorial update	28-April-2026

Online Support

Scan the QR code to submit tickets:



Copyright © 2026 ANDREW®, an Amphenol company. All Rights Reserved.

Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.

Andrew Wireless Systems GmbH, 28-April-2026