
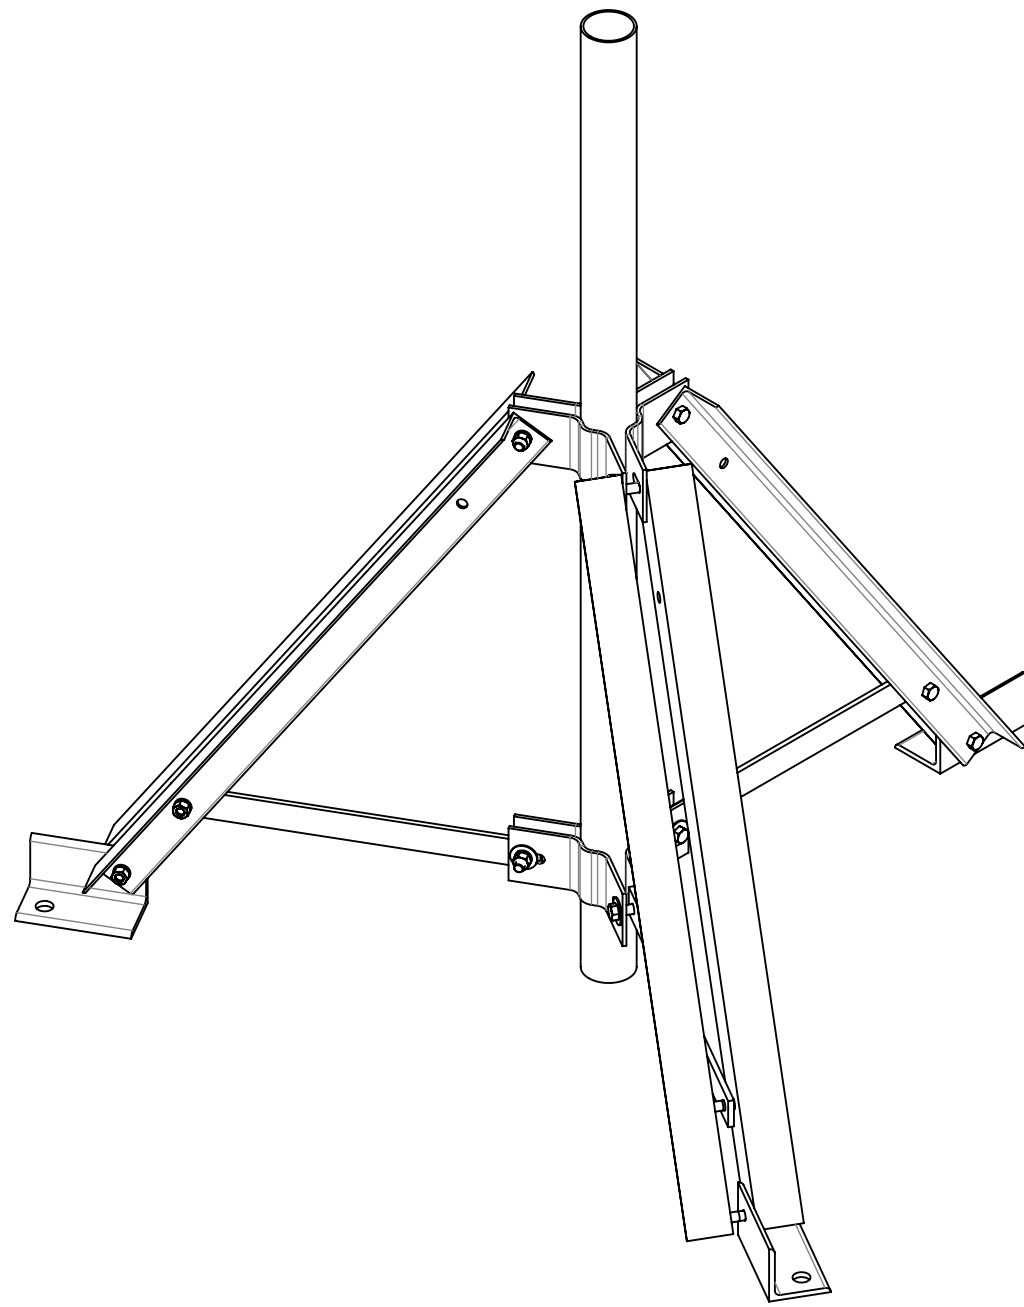


- 4
- 3
- 2
- 1
- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN & REVISED	OCG 10/04/10	
B	UPDATED DARWING TO NEW FORMAT; ADDED GWF-05 TO SAP BOM	RY1002 03SEP25	BA1025 50104737AMO

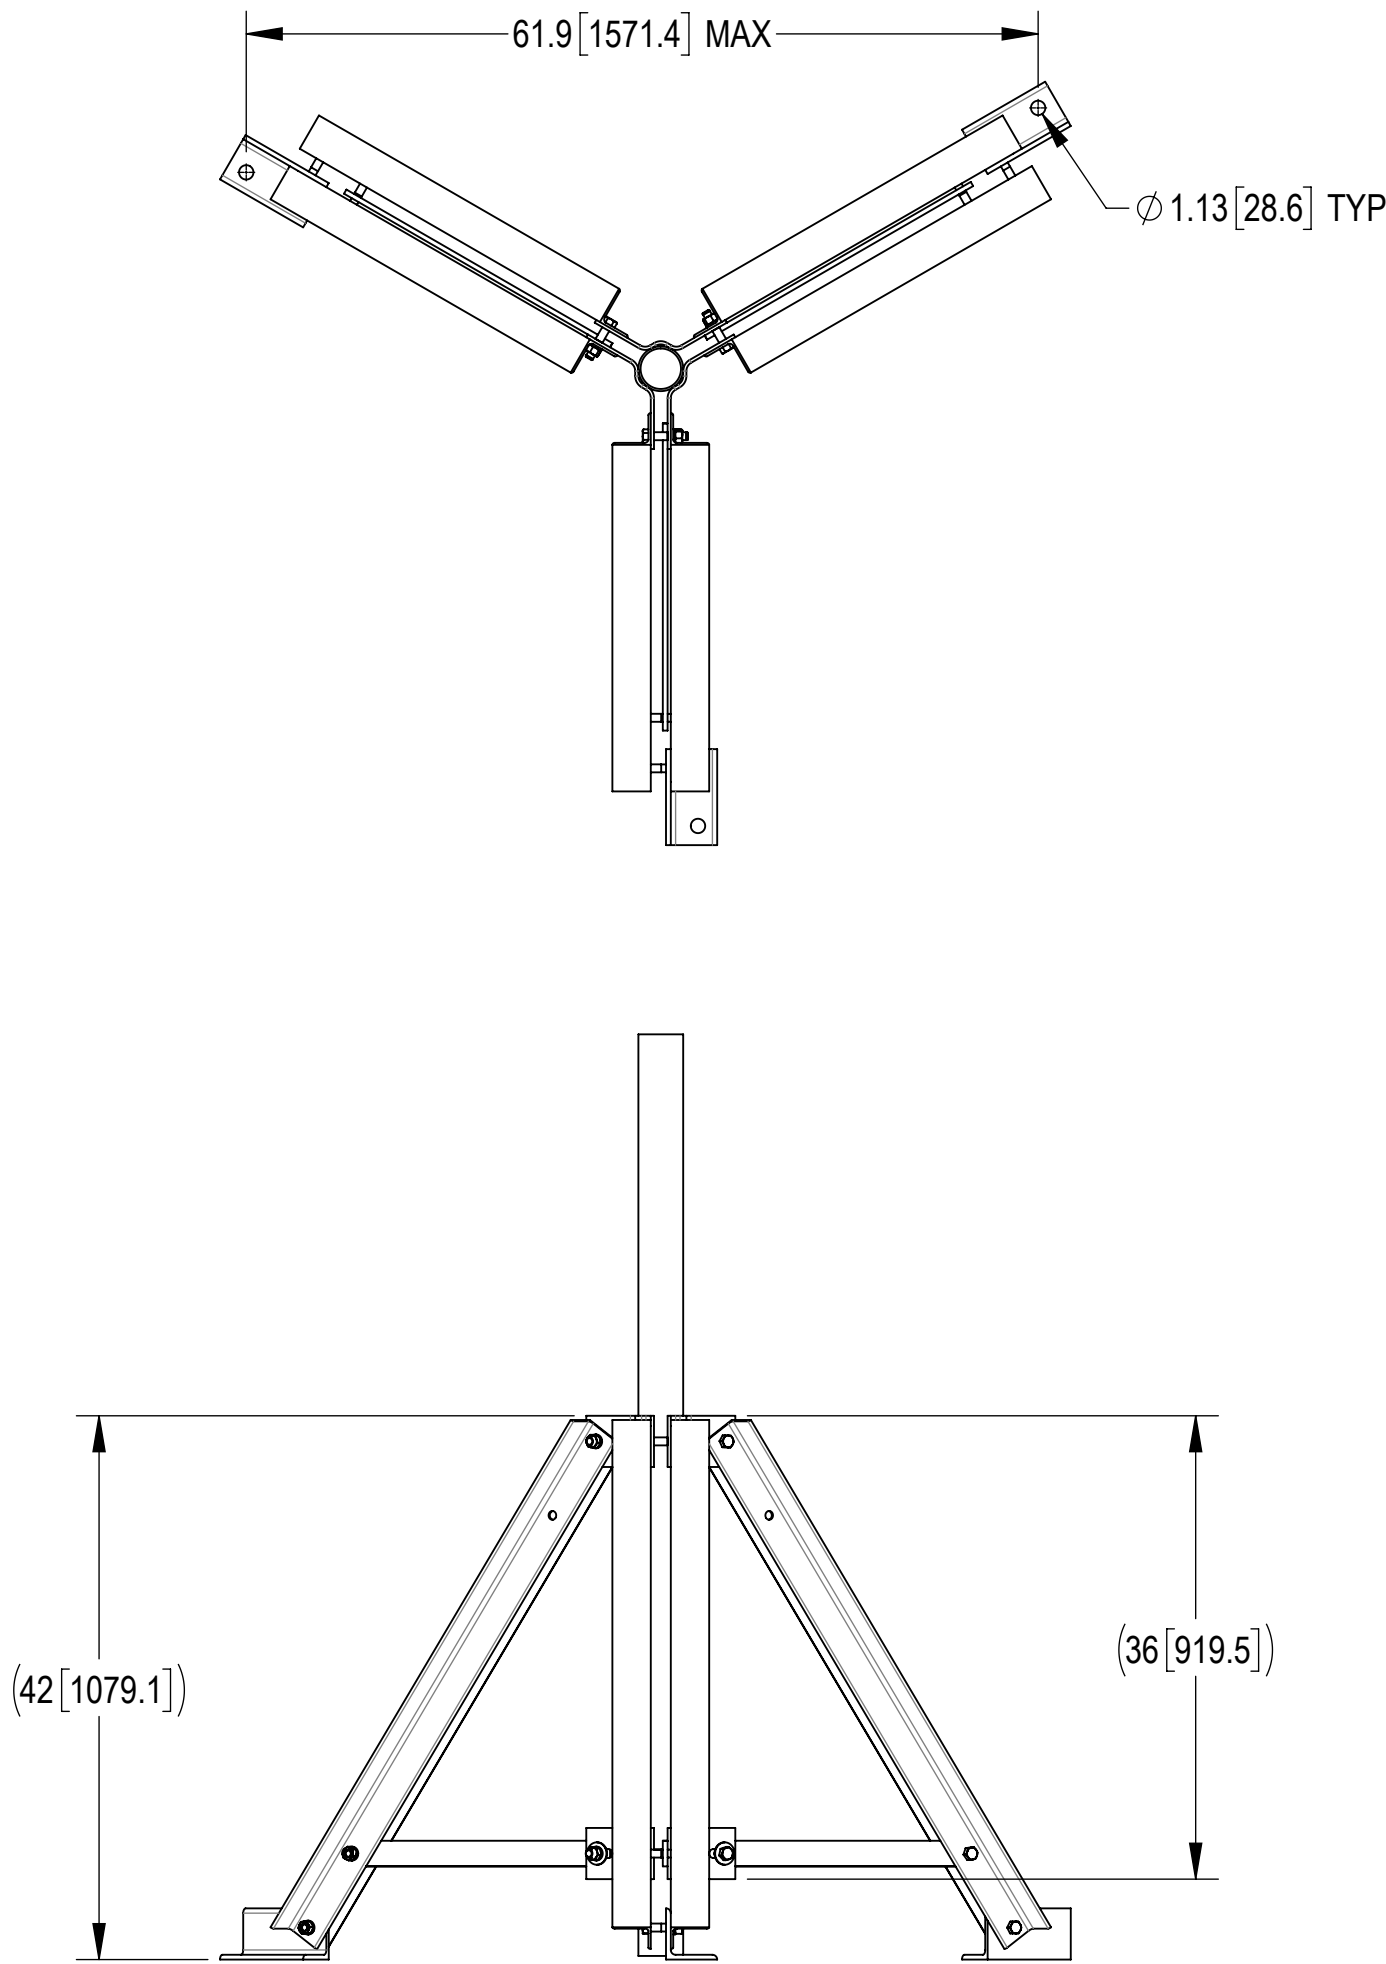

TP-G312-72 SHOWN FOR REFERENCE

TABLE: CONFIGURATIONS							
PART NUMBER	WEIGHT	INCLUDED PARTS					
		TP-G300-B	MT54672	MT54696	MT-546-126	MT54772	MT54796
TP-G300-72	177.65 LBS	1	1	-	-	-	-
TP-G300-96	190.74 LBS	1	-	1	-	-	-
TP-G300-126	205.83 LBS	1	-	-	1	-	-
TP-G312-72	181.45 LBS	1	-	-	-	1	-
TP-G312-96	193.58 LBS	1	-	-	-	-	1
TP-G312-126	206.97 LBS	1	-	-	-	-	1

DENSITY	MASS	181.45	lbs/in³
	VOLUME	642.76	lbs
	SURFACE AREA	6378.67	in³
HEIGHT	72"		
LENGTH	66"		
WIDTH	59"		

			
TOLERANCES		SAP MATERIAL MASTER	
1 PLACE .X[X] ± 0.12[3.0]	3 PLACE .XXX[X] ± 0.030[0.8]	SEE TABLE	
2 PLACE .XX[X] ± 0.06[1.5]	ANGLES ± 2°		
FINISH		MATERIAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994	CE	NAME	DATE
	OCG		10/04/10
	RW	RY1002	09/03/2025
	AD	YMENG	09/08/2025
	RE	YMENG	09/09/2025
	ECN	50104737AMO	
TITLE		SCALE	DOCUMENT NO.
2.875"-3.50"OD PIPE MOUNT TRIPOD SERIES		1:15	TP-G300-SERIES
SIZE		Auth Group	INSL
C			
MODEL		DRAWING	
VERSION	STATUS	REVISION	VERSION
00	RE	B	00
SHEET		STATUS	REVISION
1 OF 1		RE	B

Confidential