

VV-65T-F-V3



4-port small cell antenna, 4x 1695–2690 MHz, 65° HPBW, fixed electrical tilt

- Designed for strand mounting with OEM equipment

General Specifications


Antenna Type	Small Cell
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	ASA+PC, UV stabilized
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	NEX10 Female
RF Connector Location	Rear
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	4
RF Connector Quantity, low band	0
RF Connector Quantity, total	4

Dimensions

Width	200 mm 7.874 in
Depth	44 mm 1.732 in
Length	200 mm 7.874 in
Net Weight, antenna only	0.72 kg 1.587 lb

Array Layout

VV-65T-F-V3

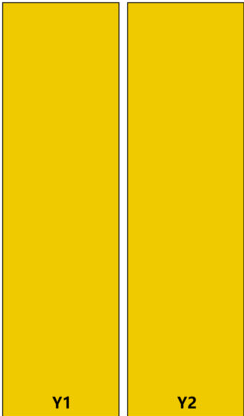

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (N/A)	AISG No.	RET UID
Y1	1695-2690	1 - 2	65°	N/A	NA	N/A
Y2	1695-2690	3 - 4	65°			

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz
Polarization	±45°
Total Input Power, maximum	200 W

VV-65T-F-V3

Electrical Specifications

	Y1,Y2	Y1,Y2	Y1,Y2	Y1,Y2
Frequency Band, MHz	1695–1920	1920–2180	2300–2500	2500–2690
RF Port	1-4	1-4	1-4	1-4
Gain, dBi	10.3	10.8	11.4	11.9
Beamwidth, Horizontal, degrees	75	69	69	64
Beamwidth, Vertical, degrees	42.5	37.8	32.2	30.8
Beam Tilt, degrees	4	4	4	4
USLS (First Lobe), dB	19	14	13	12
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	28	29	26	27
Front-to-Back Total Power at 180° ± 30°, dB	19	19	21	22
CPR at Boresight, dB	19	21	20	25
Isolation, Cross Polarization, dB	22	22	22	22
Isolation, Inter-band, dB	22	22	22	22
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153
Input Power per Port, maximum, watts	50	50	50	50

Mechanical Specifications

Wind Loading @ Velocity, frontal	60.8 N @ 150 km/h (13.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	13.4 N @ 150 km/h (3.0 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	60.8 N @ 150 km/h (13.7 lbf @ 150 km/h)
Wind Speed, maximum	200 km/h (124 mph)

Packaging and Weights

Width, packed	230 mm 9.055 in
Depth, packed	93 mm 3.661 in
Length, packed	230 mm 9.055 in
Weight, gross	0.75 kg 1.653 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value

VV-65T-F-V3

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---