


3X-RRV4-65B-R12



36- ports tri-sector antenna ,12x 694-960 and 24x 1695-2690 MHz, 65° HPBW, 12x RET

- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- Features a multiband tri-sectors antenna built under one radome
- Fully integrated flange mounting system for ease of installation
- Ideal concealment solution for areas with special regulations regarding visual impact
- Separated Extension KIT available for this antenna, check Optional Mounting Kits section
- No pole mounting kit for this antenna

General Specifications

Antenna Type	DualPol® tri-sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	24
RF Connector Quantity, low band	12
RF Connector Quantity, total	36

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Male
RET Interface, quantity	6 male
Internal RET	Low band (6) Mid band (6)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W

3X-RRV4-65B-R12


Dimensions

Length	2100 mm 82.677 in
Net Weight, antenna only	95.5 kg 210.541 lb
Outer Diameter	580 mm 22.835 in

Array Layout

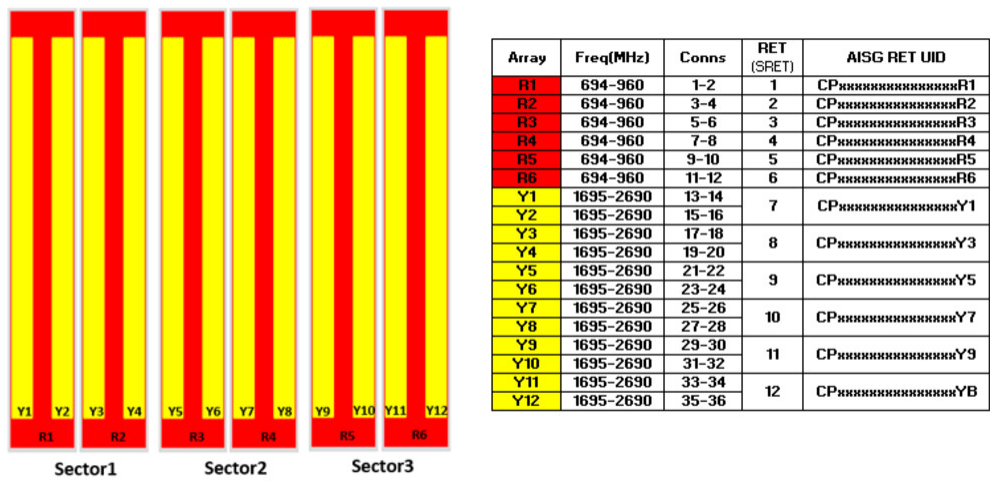

Port Configuration

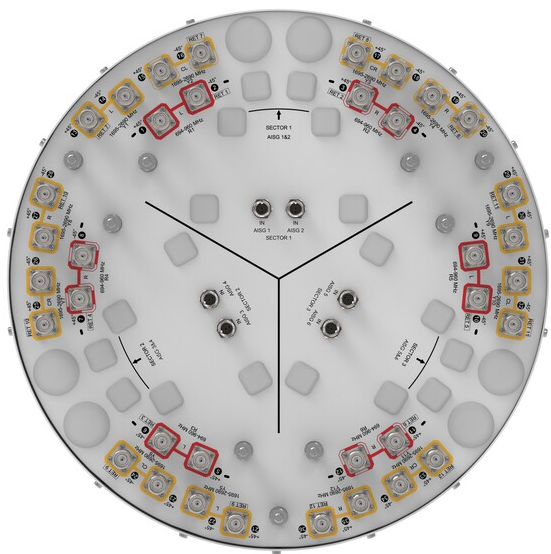

3X-RRV4-65B-R12

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,800 W @ 50 °C

Electrical Specifications

	R1-R4	R1-R4	R1-R4	Y1-Y12	Y1-Y12	Y1-Y12	Y1-Y12
Frequency Band, MHz	694–790	790–890	880–960	1695–1920	1920–2180	2300–2500	2500–2690
RF Port	1-12	1-12	1-12	13-36	13-36	13-36	13-36
Gain, dBi	14.5	14.9	15.2	16.8	18	18.4	18.1
Beamwidth, Horizontal, degrees	64	59	55	70	63	58	62
Beamwidth, Vertical, degrees	10.7	9.7	8.7	6	5.4	4.7	4.4
Beam Tilt, degrees	2–14	2–14	2–14	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	15	14	16	17	20	20
Front-to-Back Ratio at 180°, dB	31	30	28	31	33	31	33
CPR at Boresight, dB	22	22	24	20	22	23	24
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	250	200	200	200	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

3X-RRV4-65B-R12

Width, packed	750 mm 29.528 in
Depth, packed	690 mm 27.165 in
Length, packed	2510 mm 98.819 in
Weight, gross	116 kg 255.736 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---