

Low-Profile Co-location Platform Kit, 14 ft face, 30 in to 60 in OD, includes pipe

## OBSOLETE

This product was discontinued on: August 18, 2022

Replaced By:

MC-PK14M-12-126      Low-Profile Co-location Platform Kit, 14 ft face, 12 in to 50 in OD, includes pipe

## Product Classification

**Product Type**      Monopole platform kit

## General Specifications

**Mounting**      Monopole, 762–1524 mm (30–60 in) OD

**Pipe, quantity**      12

**Sectors, quantity**      3

## Dimensions

**Height**      3,200.4 mm | 126 in

**Face Width**      4.42 m | 14.5 ft

**Width**      4,419.6 mm | 174 in

**Length**      914.4 mm | 36 in

**Pipe Length**      3,200.4 mm | 126 in

**Face Support Pipe Diameter**      88.9 mm | 3.5 in

**Mounting Diameter, maximum**      1524 mm | 60 in

**Mounting Diameter, minimum**      762 mm | 30 in

**Pipe Outer Diameter**      60.325 mm | 2.375 in

**Mounting Circumference, maximum**      4,785.36 mm | 188.4 in


# MC-PK14L-12-126

---

**Mounting Circumference, minimum** 2,392.68 mm | 94.2 in

# MC-PK14L-12-126

## Outline Drawing

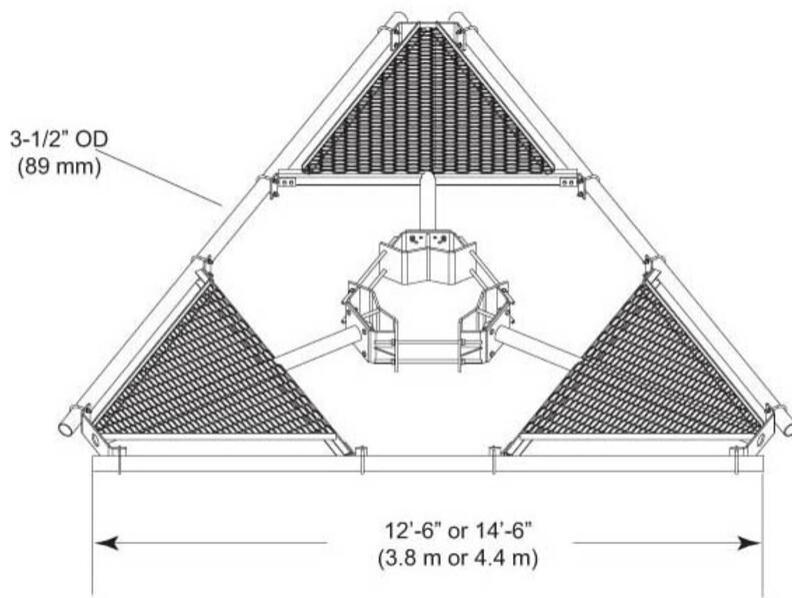

## Material Specifications

<b>Material Type</b>	Hot dip galvanized steel
----------------------	--------------------------

## Mechanical Specifications

<b>Wind Rating</b>	120 mph (BWS) at 150 ft AGL   140 mph (3-second gust) at 150 ft AGL using Exposure D per FBC
<b>Wind Rating Criteria</b>	Four 72 in x 8 in panel antennas per sector
<b>Wind Rating Test Method</b>	TIA/EIA-222

## Packaging and Weights

<b>Included</b>	Pipe mounts   Platform   Ring mount
<b>Packaging quantity</b>	1
<b>Weight, net</b>	950.594 kg   2,095.7 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

# MC-PK14L-12-126

---

## Included Products


- |            |  |
|------------|--|
| MC-PK14L-B | - Low-Profile Co-location Platform Kit, 14 ft face, 30 in to 60 in OD, pipe ordered separately |
| MT-219-H   | - Pipe Mount Kit - 2-3/8" TO 3-1/2" PIPE - pipe not included                                   |
| MT-537     | - Plain End Pipe, 2-3/8 in OD x 126 in .120" A500C 46Ksi                                       |

## \* Footnotes

**Wind Rating** BWS—Base Wind Speed; FBC—Florida Building Code

# MC-PK14L-B

---



Low-Profile Co-location Platform Kit, 14 ft face, 30 in to 60 in OD, pipe ordered separately

## Product Classification

<b>Product Type</b>	Monopole platform kit
---------------------	-----------------------

## General Specifications


<b>Mounting</b>	Monopole, 762–1524 mm (30–60 in) OD
<b>Pipe, quantity</b>	0
<b>Sectors, quantity</b>	3

## Dimensions

<b>Height</b>	254 mm   10 in
<b>Face Width</b>	4.42 m   14.5 ft
<b>Width</b>	4,419.6 mm   174 in
<b>Length</b>	914.4 mm   36 in
<b>Face Support Pipe Diameter</b>	88.9 mm   3.5 in
<b>Mounting Diameter, maximum</b>	1524 mm   60 in
<b>Mounting Diameter, minimum</b>	762 mm   30 in
<b>Pipe Outer Diameter</b>	0 mm   0 in
<b>Mounting Circumference, maximum</b>	4,785.36 mm   188.4 in
<b>Mounting Circumference, minimum</b>	2,392.68 mm   94.2 in

# MC-PK14L-B

## Outline Drawing

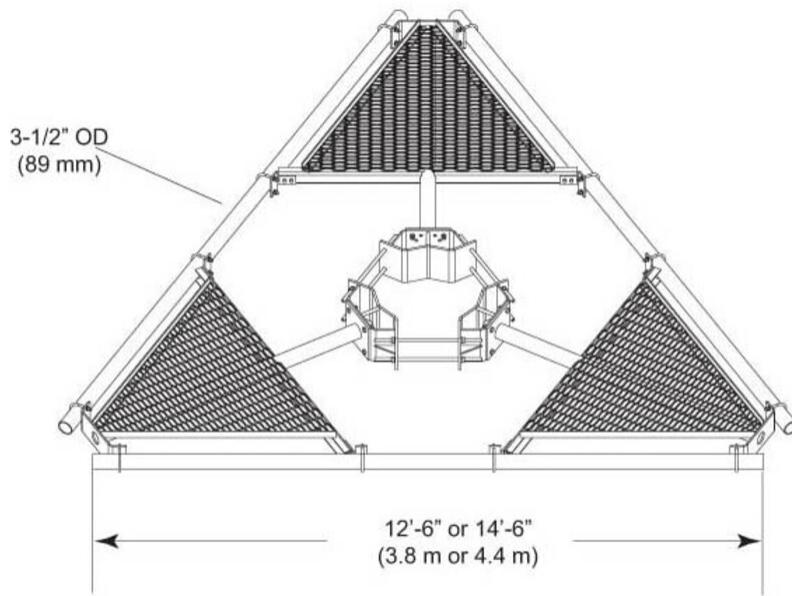

## Material Specifications

<b>Material Type</b>	Hot dip galvanized steel
----------------------	--------------------------

## Mechanical Specifications

<b>Wind Rating</b>	120 mph (BWS) at 150 ft AGL   140 mph (3-second gust) at 150 ft AGL using Exposure D per FBC
<b>Wind Rating Test Method</b>	TIA/EIA-222

## Packaging and Weights

<b>Included</b>	Pipe mounts   Platform   Ring mount
<b>Packaging quantity</b>	1
<b>Weight, net</b>	684.879 kg   1,509.9 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

# MC-PK14L-B

---

## Wind Rating

BWS—Base Wind Speed; FBC—Florida Building Code

# MT-219-H

---



Pipe Mount Kit - 2-3/8" TO 3-1/2" PIPE - pipe not included

## Product Classification

<b>Product Type</b>	Pipe mount kit
---------------------	----------------

## General Specifications

<b>Mounting</b>	Pipe, 60.3 mm (2-3/8 in) OD   Pipe, 88.9 mm (3-1/2 in) OD
-----------------	---

## Dimensions

<b>Height</b>	254 mm   10 in
<b>Width</b>	127 mm   5 in
<b>Length</b>	127 mm   5 in
<b>Mounting Diameter, maximum</b>	88.9 mm   3.5 in
<b>Mounting Diameter, minimum</b>	60.325 mm   2.375 in

## Material Specifications

<b>Material Type</b>	Hot dip galvanized steel
----------------------	--------------------------

## Packaging and Weights

<b>Included</b>	Crossover bracket   U-bolts
<b>Packaging quantity</b>	1
<b>Weight, net</b>	4.9 kg   10.803 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



# MT-537

---



Plain End Pipe, 2-3/8 in OD x 126 in .120" A500C 46Ksi

A500 46 ksi steel

## Product Classification

**Product Type** Plain end pipe

## General Specifications

**Pipe, quantity** 1

## Dimensions

**Height** 60.96 mm | 2.4 in

**Width** 60.96 mm | 2.4 in

**Length** 3,200.4 mm | 126 in

**Pipe Length** 3,200.4 mm | 126 in

**Pipe Outer Diameter** 60.325 mm | 2.375 in

**Material Thickness** 3.048 mm | 0.12 in

## Material Specifications

**Material Type** A500 | Hot dip galvanized steel

**Material Grade** C

**Material Strength** 46 KSI

## Packaging and Weights

**Included** Pipe

**Packaging quantity** 1

**Weight, net** 18 kg | 39.683 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Page 10 of 11

MT-537

ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

