

RRZZ2VV-6533D-R8



16-port sector/multibeam antenna 4x 694–960 MHz, 4x 1427-2690 MHz 65° HPBW and 8x 1695–2690 MHz 2x 2-Beam 33°HPBW, 8x RET

- Optional Mounting Kits with mechanical tilt capacity need to be ordered separately
- Innovative aerodynamic shape optimized for reduced wind loading in every direction
- "Green" packaging of reduced size and gross weight that uses less material and reduces shipping pollution
- GREEN and High Capacity Antenna Solution

General Specifications

Antenna Type	Multibeam
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	12
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (6)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

RRZZ2VV-6533D-R8

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2577 mm 101.457 in
Net Weight, antenna only	50 kg 110.231 lb

Array Layout

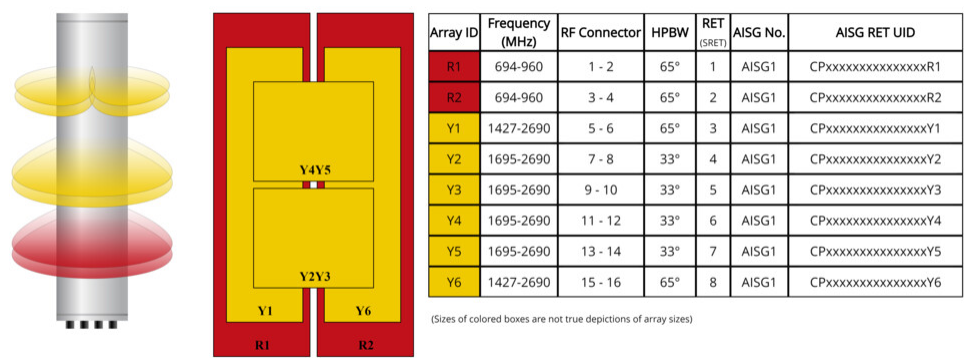

Port Configuration



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2690 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,700 W @ 50 °C

RRZZ2VV-6533D-R8

Electrical Specifications

Frequency Band, MHz	698–806	790–894	890–960	1427–1518	1695–1995	1920–2300	2300–2500	2490–2690
RF Port	1,2,3,4	1,2,3,4	1,2,3,4	5,6,15,16	5,6,15,16	5,6,15,16	5,6,15,16	5,6,15,16
Gain at Mid Tilt, dBi	15.4	15.6	15.8	15.2	16.9	17.8	18.5	18.9
Beamwidth, Horizontal, degrees	70	68	65	82	75	68	61	57
Beamwidth, Vertical, degrees	9.5	8.7	8	7.2	5.9	5.3	4.7	4.5
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	21	19	17	20	17	17	17	19
Front-to-Back Ratio at 180°, dB	29	29	31	31	32	30	32	33
Front-to-Back Total Power at 180° ± 30°, dB	21	21	20	22	23	23	24	23
CPR at Boresight, dB	20	18	16	17	20	20	22	20
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C,	250	250	250	200	200	200	200	200

RRZZ2VV-6533D-R8

maximum,
watts

Electrical Specifications

Frequency Band, MHz	1710–1995	1920–2300	2300–2500	2490–2690
RF Port	7,8,9,10,11,12,13,14	7,8,9,10,11,12,13,14	7,8,9,10,11,12,13,14	7,8,9,10,11,12,13,14
Gain at Mid Tilt, dBi	17.8	19	19.3	19.7
Beamwidth, Horizontal, degrees	35	32	29	26
Beamwidth, Vertical, degrees	7.2	6.5	5.8	5.3
Beam Tilt, degrees	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	17	17	16
Front-to-Back Ratio at 180°, dB	34	36	34	33
Front-to-Back Total Power at 180° ± 30°, dB	28	30	29	28
CPR at Boresight, dB	16	20	21	20
Isolation, Cross Polarization, dB	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25
Isolation, Beam to Beam, dB	17	17	17	17
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd	-153	-153	-153	-153

RRZZ2VV-6533D-R8

Order, 2 x				
20 W, dBc				
Input Power	200	200	200	200
per Port at				
50°C,				
maximum,				
watts				

Mechanical Specifications

Wind Loading @ Velocity, frontal	899.0 N @ 150 km/h (202.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	278.0 N @ 150 km/h (62.5 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,076.0 N @ 150 km/h (241.9 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	619.0 N @ 150 km/h (139.2 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	2764 mm 108.819 in
Weight, gross	66 kg 145.505 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant




Included Products

BSAMNT-3F	–	Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---

BSAMNT-3F

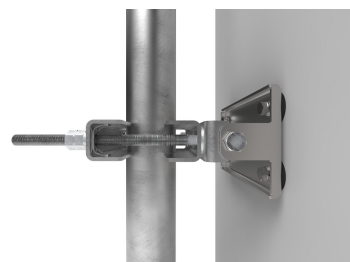

Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

Product Classification

Product Type Fixed tilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 5.6 kg | 12.346 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Weight, gross 5.8 kg | 12.787 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

BSAMNT-3F

