




- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 2.1 ANY HAZARDS OR OBSTRUCTIONS TO THE CLIMBING FACILITY AND SAFETY CLIMB MUST BE IDENTIFIED PRIOR TO INSTALLING THE APPURTENANCE. ADDITIONAL PRODUCTS MAY BE REQUIRED TO MAINTAIN THE INTEGRITY OF THE SAFETY CLIMB. DURING INSTALLATION, TEMPORARY AND/OR PERMANENT PRECAUTIONARY MEASURES SHOULD BE TAKEN TO PRESERVE THE CLIMBING FACILITY AND/OR SAFETY CLIMB.
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	LL1090 16NOV23	EB1063 40183094CMO
B	MTC4165-LAB01 (ITEM 10) WAS MTC4165-LAB02	RY1002 12MAR24	EB1063 40190737CMO
C	GB-04165 WAS GB-03145; GWF-04 WAS GWF-03	RY1002 11APR24	EB1063 40193135CMO
D	CHG EYEBOLTS LOCATIONS TO TWO INNER HOLES; CHG LOADING CAPACITY; CRATE CR150704 WAS BX15	RY1002 24MAY24	EB1063 40195891CMO
E	UPDATED MTC4165-LAB01	RY1002 14JUL25	BA1025 50103906AMO

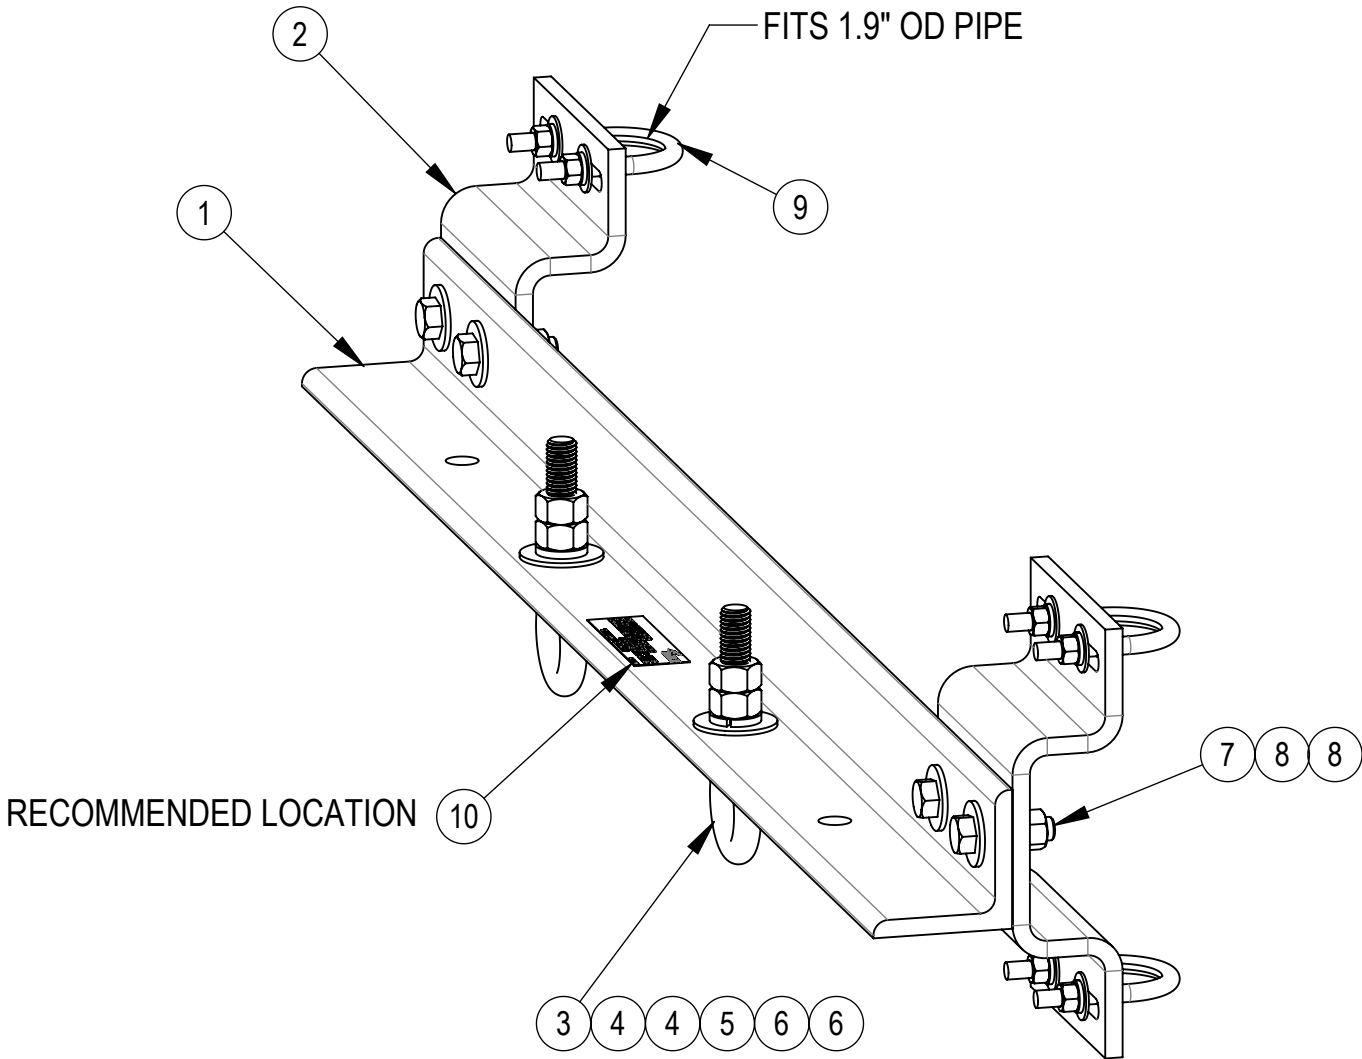

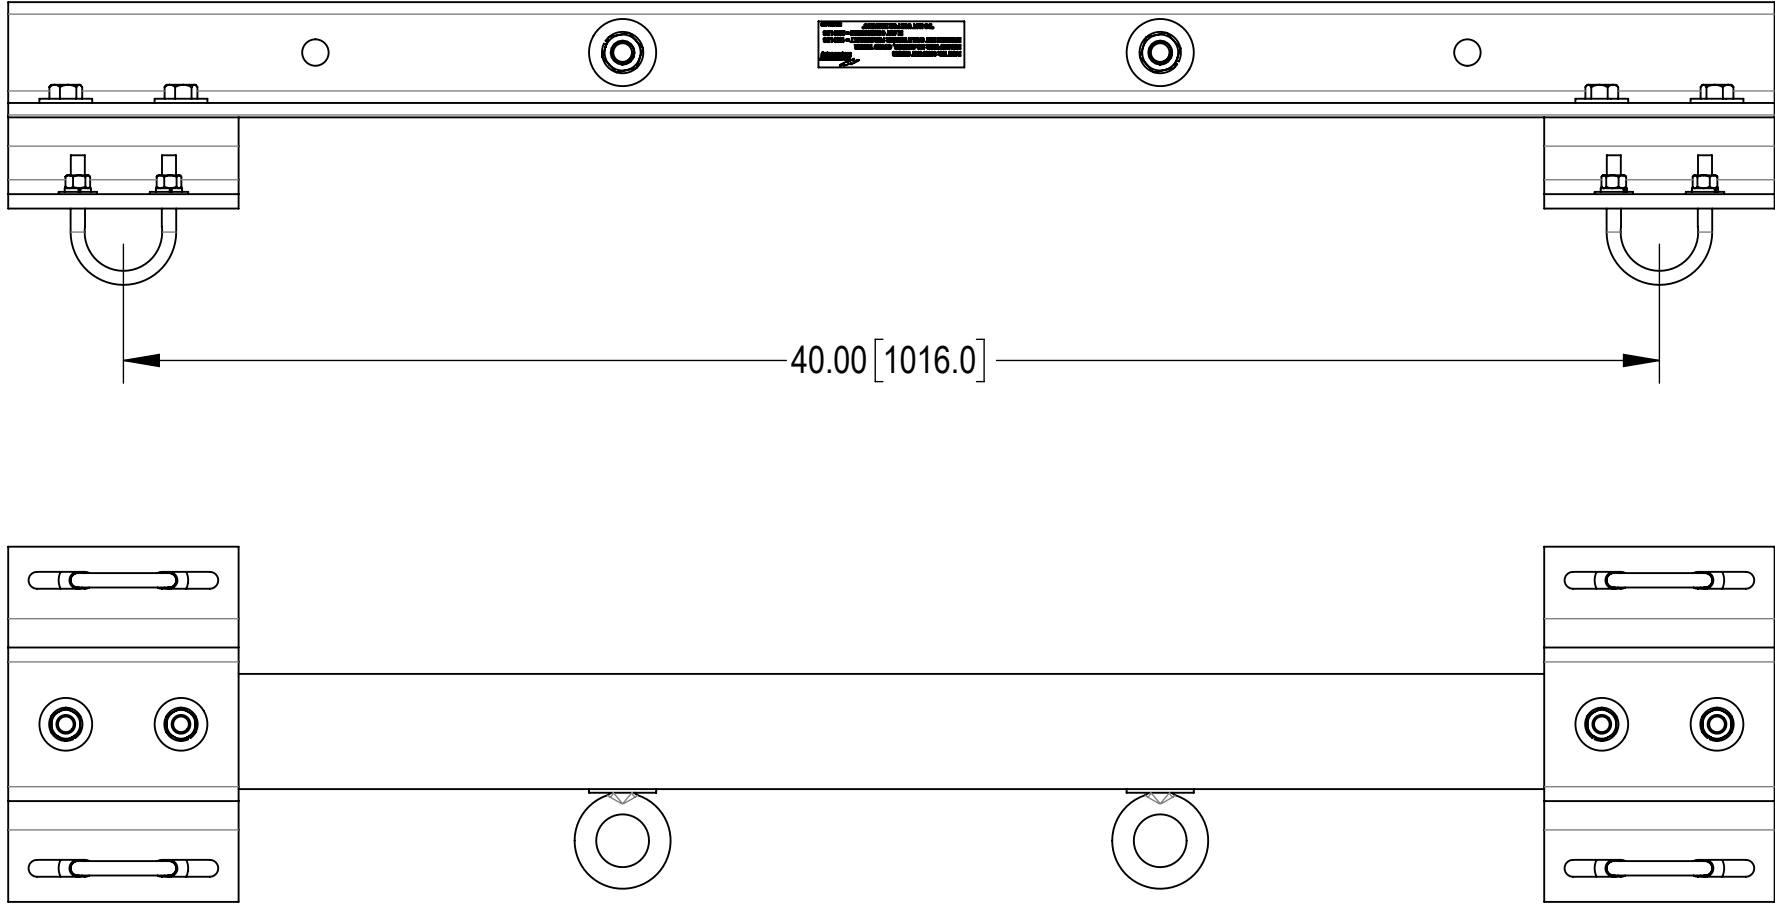

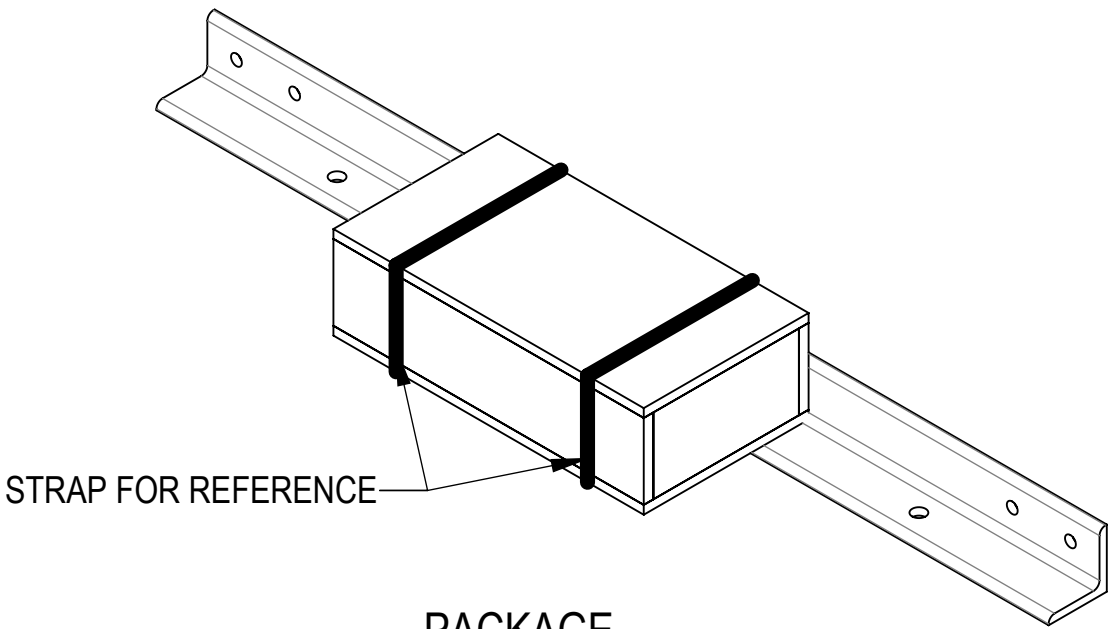



NOTE: -ANY ARRANGEMENTS OF THE EYEBOLTS IS ACCEPTABLE
-MAXIMUM NET CABLE WEIGHT
A -PER EYEBOLT = 1000 LBS
B -IN ANY COMBINATION = 2000 LBS
-NOT TO BE USED FOR HOISTING
-COMPETENT PERSON TO MAKE DETERMINATION OF USAGE
ON THE STRUCTURE




COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	MTC4165-041-42-00	41-42 INCH CROSSMEMBER GALVANIZED	1	26.98 LBS	
2	MTC4166-00	STEEL OFFSET BRACKET, GALV	2	7.44 LBS	
3	9674-1	BOLT, EYE, 5/8X3, STL, GALV	2	0.08 LBS	
4	GWF-05	5/8" GALV FLAT WASHER, 1.70D	4	0.06 LBS	
5	GWL-05	5/8" GALV LOCK WASHER	2	0.03 LBS	
6	GN-05	5/8" GALV HEX NUT	4	0.08 LBS	
7	GB-04165	1/2" X 1-3/4" GALV BOLT KIT	4	0.14 LBS	
8	GWF-04	1/2" GALV FLAT WASHER	8	0.04 LBS	
9	GUB3230	3/8" X 2" X 3" GALV U-BOLT	4	0.24 LBS	
10	MTC4165-LAB01	LABEL, HG ANCHOR, GUYED-TOWER	1	0.00 LBS	


DENSITY	MASS	44.98	lbs/in³
VOLUME	163.02	in³	
SURFACE AREA	1075.20	in²	
HEIGHT	7.36"		
LENGTH	9.00"		
WIDTH	46.00"		

<div><h1>ANDREW[®]</h1><div>an Amphenol company</div></div>									
TOLERANCES						SAP MATERIAL MASTER			
1 PLACE .X[X] ± 0.2[6.3]			3 PLACE .XXX[X] ± 0.060[1.5]			860674607-041-42			
2 PLACE .XX[X] ± 0.12[3.0]			ANGLES ± 2°						
FINISH					MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	TITLE HG ANCHOR,GUYED-TOWER,41-42" FACE					
	CE	LL1090	16NOV23						
	RW	RY1002	07/14/2025						
									
	AD	BA1025	07/16/2025						
	RE	YMENG	08/05/2025						
	ECN 50103906AMO			SCALE 1:8		DOCUMENT NO. 860674607-041-42			
	SIZE	Auth Group	INSL	MODEL			DRAWING		
C			VERSION 04	STATUS RE	REVISION E	VERSION 04	STATUS RE	REVISION E	


Confidential

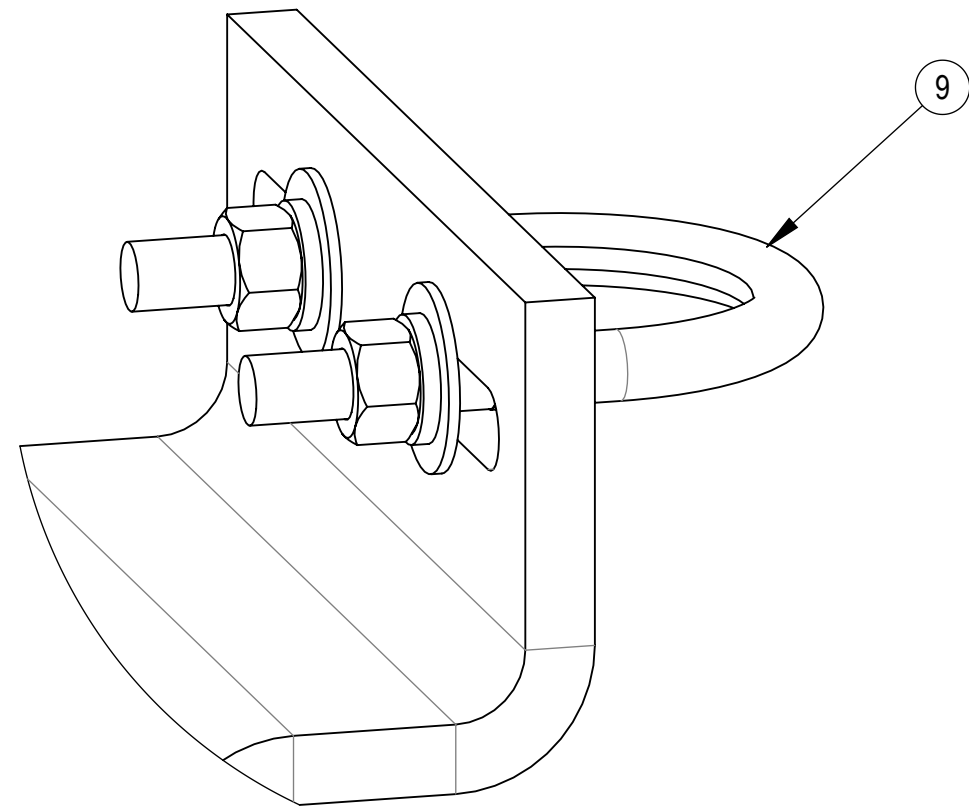


DETAIL A
SCALE 1 : 1

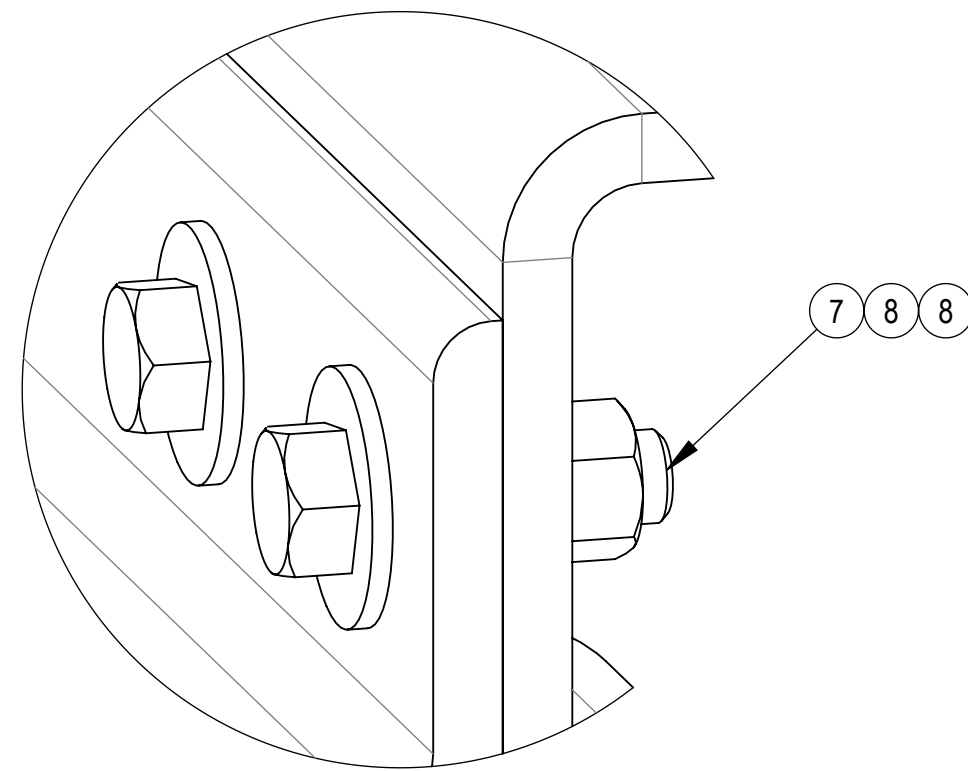

DETAIL B
SCALE 1 : 1

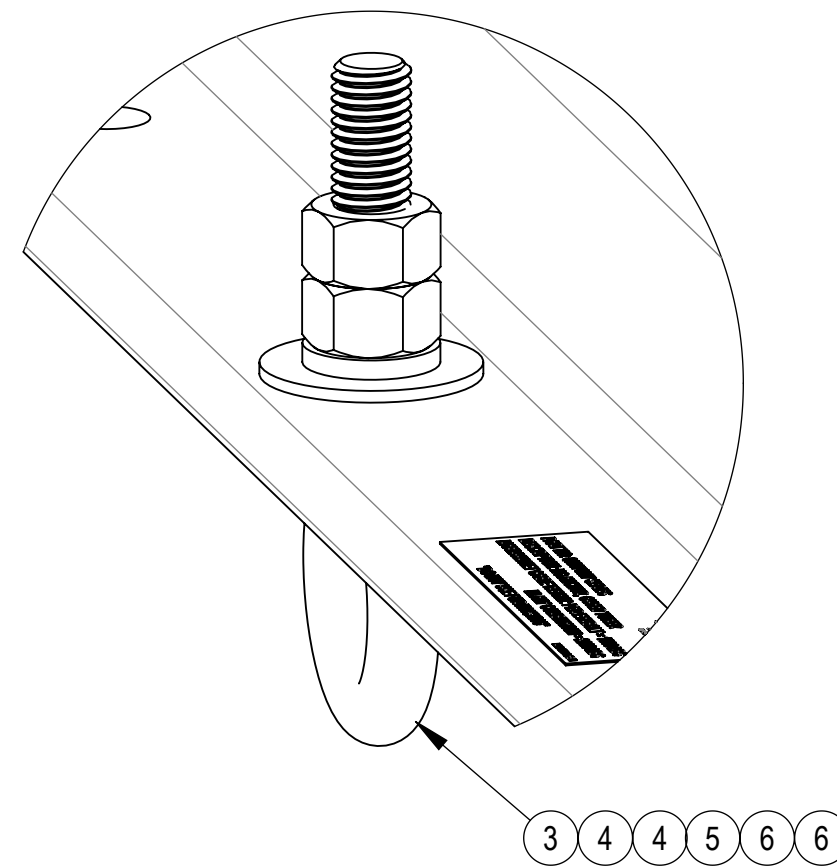

DETAIL C
SCALE 2 : 3


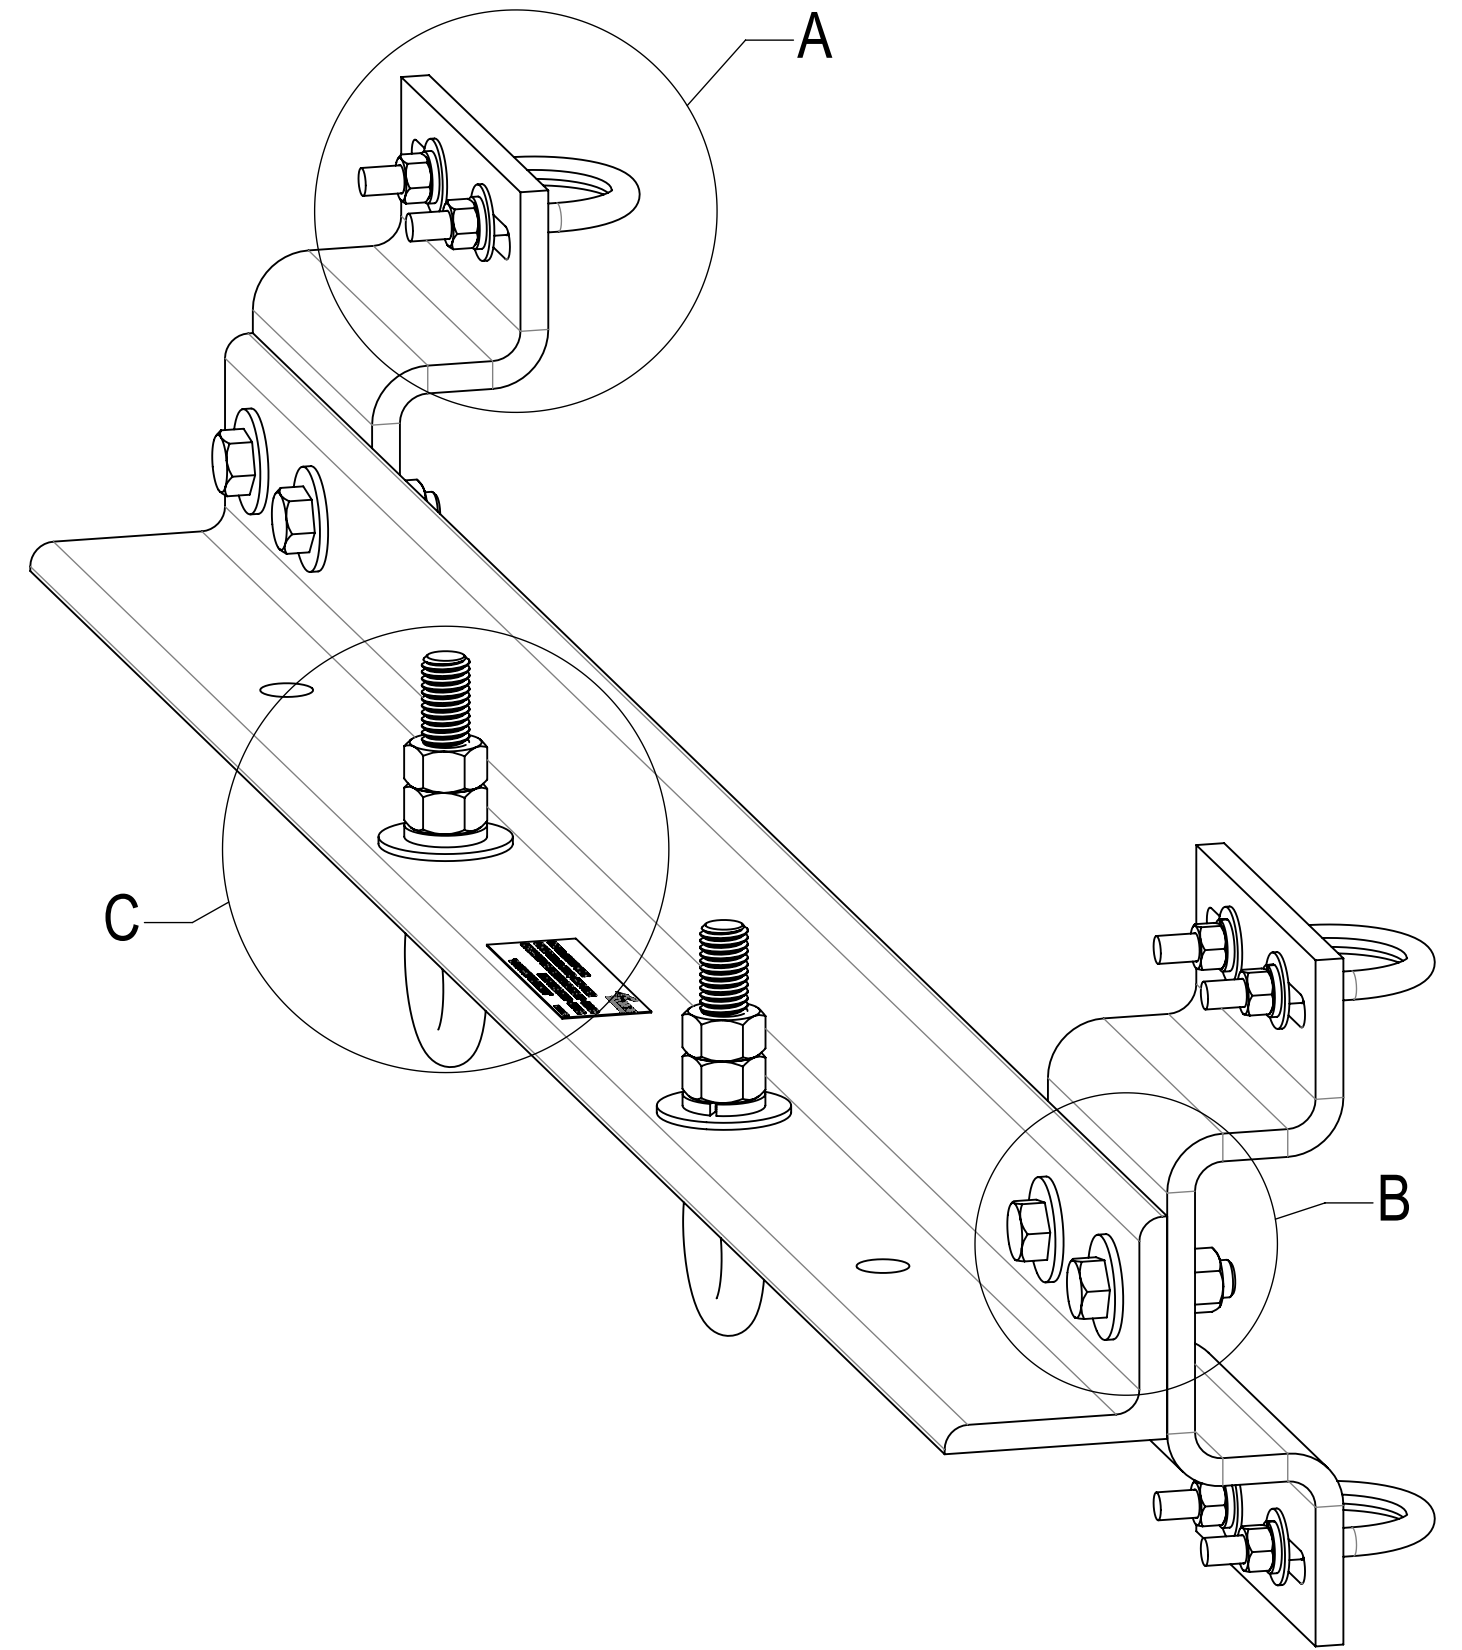


NOTE: -ANY ARRANGEMENTS OF THE EYEBOLTS IS ACCEPTABLE
-MAXIMUM NET CABLE WEIGHT
A -PER EYEBOLT = 1000 LBS
B -IN ANY COMBINATION = 2000 LBS
-NOT TO BE USED FOR HOISTING
-COMPETENT PERSON TO MAKE DETERMINATION OF USAGE
ON THE STRUCTURE

ANDREW® an Amphenol company

TITLE
HG ANCHOR,GUYED-TOWER,41-42" FACE

SIZE **C** SCALE **1:5** DOCUMENT NO. 860674607-041-42



DRAWING			SHEET 2 OF 2
VERSION	STATUS	REVISION	
04	RE	E	

Confidential