

R-85B-R1VB



2-port sector antenna, 2x 694–960 MHz, 85° HPBW, 1x RET

- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

General Specifications

Antenna Type	Sector
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	PVC, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	2
RF Connector Quantity, total	2

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (1)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W
Protocol	3GPP/AISG 2.0 (Single RET)

R-85B-R1VB

Dimensions

Width	320 mm 12.598 in
Depth	166 mm 6.535 in
Length	1980 mm 77.953 in
Net Weight, antenna only	14.6 kg 32.187 lb

Array Layout

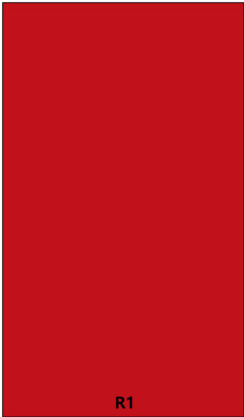


Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	85°	1	AISG1	CPxxxxxxxxxxxxR1

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

R-85B-R1VB

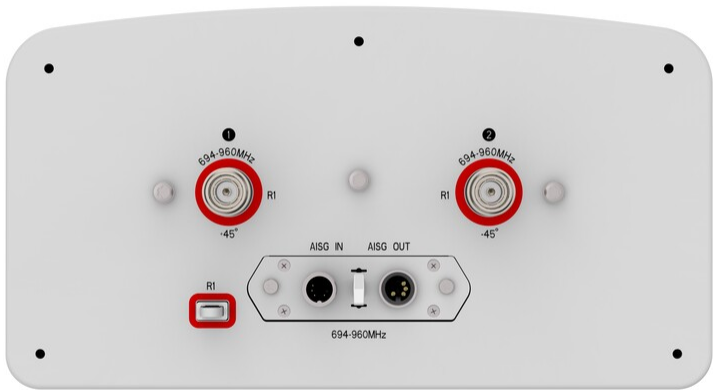

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	400 W

Electrical Specifications

	R1	R1	R1
Frequency Band, MHz	698–806	790–894	890–960
RF Port	1,2	1,2	1,2
Gain, dBi	14.8	15.3	15.3
Beamwidth, Horizontal, degrees	82	79	76
Beamwidth, Vertical, degrees	12.1	11	10.3
Beam Tilt, degrees	2–12	2–12	2–12
USLS (First Lobe), dB	16	18	18
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	23	25	26
CPR at Boresight, dB	24	24	22

R-85B-R1VB

Isolation, Cross Polarization, dB	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150
Input Power per Port, maximum, watts	200	200	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	831.0 N @ 150 km/h (186.8 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	275.0 N @ 150 km/h (61.8 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	910.0 N @ 150 km/h (204.6 lbf @ 150 km/h)
Wind Speed, maximum	200 km/h (124 mph)

Packaging and Weights

Width, packed	450 mm 17.717 in
Depth, packed	280 mm 11.024 in
Length, packed	2275 mm 89.567 in
Weight, gross	26.2 kg 57.761 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

BSAMNT-B98-01	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
---------------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---