

NNSS-65C-HG-R2B



8-port Next Generation PerforMax™ sector antenna, 4x 698–896 and 4x 3300-4000 MHz, 65° HPBW, 2x RET, 1x SBT

- Superior patterns for enhanced interference mitigation resulting in improved SINR, higher throughput, and more capacity
- Antenna optimized for higher gain with superior radiation efficiency
- Best in class PIM immunity
- Internal SBTs allow remote RET control from the radio over the RF jumper cable
- Powered by Andrew's SEED® technology (Sustainable Energy Efficient Design)
- Interleaved dipole technology results into an attractive, low wind load mechanical package
- Designed to reduce SUB 1 alarm triggers

General Specifications

Antenna Type	Sector with internal RET and bias tee
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	4
RF Connector Quantity, low band	4
RF Connector Quantity, total	8

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal Bias Tee	Port 1
Internal RET	High band (1) Low band (1)



NNSS-65C-HG-R2B

Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W
Protocol	3GPP/AISG 2.0

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2438 mm 95.984 in
Net Weight, without mounting kit	38 kg 83.776 lb

Array Layout

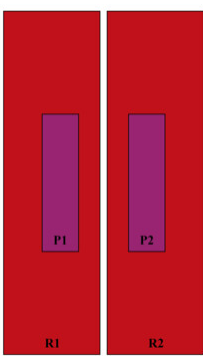


Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	SBT RF PORT	SBT No.	RET UID
R1	698-896	1 - 2	1	AISG1	1	1	CPxxxxxxxxxxxxxxR1
R2	698-896	3 - 4					
P1	3300-4000	5 - 6	2	AISG1	1	1	CPxxxxxxxxxxxxxxP1
P2	3300-4000	7 - 8					

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

NNSS-65C-HG-R2B

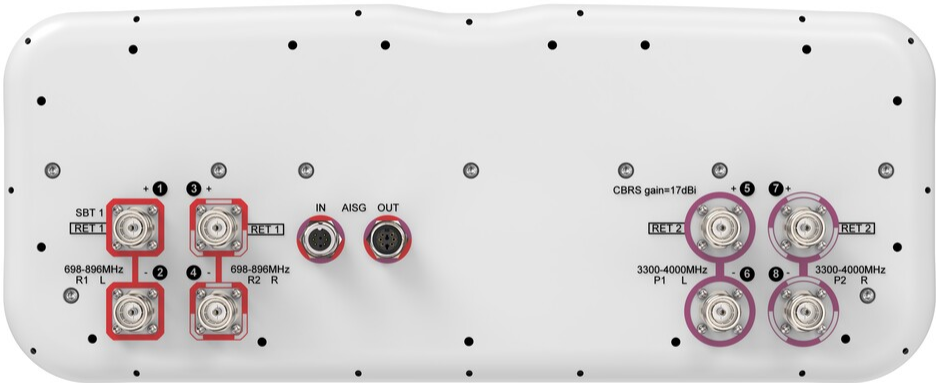

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	3300 – 4000 MHz 698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	P1,P2	P1,P2	P1,P2
Frequency Band, MHz	698–806	806–896	3300–3550	3550–3700	3700–4000
RF Port	1-4	1-4	5-8	5-8	5-8
Gain, Maximum, dBi	16.3	16.5	17.5	17.8	17.8
Gain, dBi	15.9	16.3	17.2	17.6	17.5
Beamwidth, Horizontal, degrees	73	69	67	63	63
Beamwidth, Vertical, degrees	9.1	8.1	7.4	7	6.7

NNSS-65C-HG-R2B

Beam Tilt, degrees	0-10	0-10	0-10	0-10	0-10
USLS (First Lobe), dB	15	15	17	17	17
Front-to-Back Ratio at 180°, dB	28	32	32	32	31
CPR at Boresight, dB	24	22	17	17	15
Isolation, Cross Polarization, dB	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-145	-145	-145
Input Power per Port at 50°C, maximum, watts	300	300	100	100	100

Mechanical Specifications

Wind Loading @ Velocity, frontal	865.0 N @ 150 km/h (194.5 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	268.0 N @ 150 km/h (60.2 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,037.0 N @ 150 km/h (233.1 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	595.0 N @ 150 km/h (133.8 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	2685 mm 105.709 in
Weight, gross	58 kg 127.868 lb

Regulatory Compliance/Certifications

Agency	Classification
UK-ROHS	Compliant

Included Products

BSAMNT-3	-	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
BSAMNT-M	-	Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes



NNSS-65C-HG-R2B

Performance Note Severe environmental conditions may degrade optimum performance